
Geotrek Documentation

Release 2.99.0

Makina Corpus

Jul 18, 2023

USER MANUAL

1 Overview	1
1.1 Interface	1
2 Screencasts	3
3 Edition d'un objet	5
3.1 Segmentation dynamique	5
3.2 Snapping - Aimantage - Accrochage	5
4 Modules de gestion	7
4.1 Les tronçons	7
4.2 Les sentiers	8
4.3 Les statuts	8
4.4 Les aménagements	8
4.5 La signalétique	9
4.6 Les interventions	10
4.7 Les chantiers	10
5 Valorisation des sentiers	11
5.1 Itinérance	11
5.2 Points de référence	11
5.3 Ordre des catégories	12
6 Activités outdoor	13
6.1 Sites et parcours	13
6.2 Nomenclatures	14
6.3 Filières	14
6.4 Représentation verticale : les vues HD	15
7 Pages statiques	19
7.1 Créer une page statique	20
7.2 Construire une page statique	21
7.3 Ajouter du contenu dans un bloc	24
7.4 Astuces	25
8 Paramétrage	27
8.1 Accès interface admin	27
8.2 Paramétrages des modules	27
8.3 Gestion des utilisateurs	31
8.4 Configuration des portails	33
8.5 Pictogrammes	34

9 External APIs	35
9.1 Geotrek et IGNrando'	35
10 Visualiser les données dans QGIS	37
10.1 Création de vues SQL pour afficher des couches dans QGIS	37
10.2 Créer une connexion à la base de données PostgreSQL du projet	38
10.3 Créer un projet QGIS à partir des vues SQL	39
11 Frequently asked questions	41
11.1 How are 3D informations obtained ?	41
11.2 How is the ascent computed on treks ?	41
11.3 How are POIs related to treks ?	41
11.4 Can I have overlapping districts ?	42
11.5 Why does Makina Corpus sell Geotrek, released under an Open-Source license ?	42
11.6 How can I help and contribute ?	43
12 Installation	45
12.1 Requirements	45
12.2 Information to prepare before installation	45
12.3 Fresh installation	46
12.4 Extra steps	46
12.5 Upgrade	47
12.6 Server migration	48
12.7 Ubuntu bionic PostGIS 2.5 upgrade	49
12.8 Uninstallation	50
13 Troubleshooting	51
13.1 Frequent problems encountered	51
13.2 Signature check for debian packages	52
14 Loading data	53
14.1 Prerequisites for your data	53
14.2 Load MNT raster	54
15 Configuration	55
15.1 Basic configuration update	55
15.2 NGINX configuration	55
15.3 Activate SSL / HTTPS	55
15.4 Users management	56
15.5 Database users	56
15.6 Advanced Configuration	57
16 Advanced configuration	59
16.1 Custom setting file	59
16.2 Spatial extents	59
16.3 Email settings	59
16.4 Disable modules and components	60
16.5 Feedback reports settings	60
16.6 Sensitive areas	63
16.7 Diving	63
16.8 Outdoor	64
16.9 Swagger	64
16.10 WYSIWYG editor configuration	64
16.11 View attachments in the browser	65
16.12 Change or add WMTS tiles layers (IGN, OSM, Mapbox...)	65

16.13 External authent	66
16.14 Map layers colors and style	67
16.15 External raster layers	67
16.16 Disable darker map backgrounds	68
16.17 Configure Social network	68
16.18 Override translations	69
16.19 Override public PDF templates	70
16.20 Custom font in public document template	71
16.21 Custom colors in public document template	72
16.22 Primary color in PDF templates	72
16.23 Custom logos	72
16.24 Copyright on pictures	72
16.25 Resizing uploaded pictures	72
16.26 Prohibit usage of big pictures and small width / height	73
16.27 Prohibit usage of certain file types	73
16.28 Share services between several Geotrek instances	74
16.29 Control number of workers and request timeouts	74
16.30 Configure columns displayed in lists views and exports	74
16.31 Configure form fields in creation views	75
16.32 Configure form fields required or needed for review or publication	75
17 Settings details	77
17.1 Basic settings	77
17.2 Advanced settings	78
18 Maintenance	115
18.1 Application backup	115
18.2 Application restore	115
18.3 PostgreSQL optimization	116
18.4 Access your database securely on your local machine (QGIS)	116
18.5 Major evolutions from version 2.33	116
19 Synchronization	117
19.1 Manual synchronization	117
19.2 Automatic synchronization	117
19.3 Synchronization options	117
19.4 Synchronization filtered by source and portal	118
19.5 Synchronization filtered by touristic content categories	119
19.6 Synchronization with a distant Geotrek-rando server	119
19.7 Geotrek-mobile app v3	119
20 Import data	121
20.1 Import paths	121
20.2 Import data from touristic data systems (SIT)	122
20.3 Import data from a remote Geotrek instance	126
20.4 Import other datas from a file	127
20.5 Exploitation commands	136
21 Docker	139
21.1 Installation	139
21.2 Management commands	139
22 Sensitivity	141
22.1 Enabling	141
22.2 Settings	141

22.3	Import from https://biodiv-sports.fr	141
22.4	Import from shapefile	141
22.5	Sync to Geotrek-rando	142
23	Contributing	143
23.1	Conventions	143
23.2	Definition of done	143
23.3	Release	144
24	Development	145
24.1	Quickstart	145
24.2	Install git hooks	145
24.3	Adding or upgrade dependencies	145
24.4	Model modification	146
24.5	Check quality	147
24.6	Run tests	147
24.7	Setup to run rando synchronization locally	148
24.8	Setup to use screamshotter-related features locally	148
24.9	Database reset	148
24.10	Restore existing Database	148
24.11	Mapentity development	149
24.12	UML diagrams of data model	149
24.13	Documentation	149
25	Translating	151
25.1	Getting started	151
25.2	Translation features	154
25.3	Release translations (only for github repository managers)	154
26	Documentation	157
27	Design	159
27.1	Architecture	159
27.2	Main components	159
27.3	Django conventions twists	160
27.4	Main roles of PostgreSQL triggers	160
28	Authors	161
28.1	Makina Corpus	161
28.2	Parc national des Ecrins	162
28.3	Others	162
28.4	Credits	162
29	CHANGELOG	163
29.1	2.99.0 (2023-07-18)	163
29.2	2.98.1 (2023-05-30)	163
29.3	2.98.0 (2023-03-27)	164
29.4	2.97.4 (2023-03-09)	165
29.5	2.97.3 (2023-02-28)	165
29.6	2.97.2 (2023-02-22)	165
29.7	2.97.1 (2023-02-17)	165
29.8	2.97.0 (2023-02-17)	165
29.9	2.96.1 (2022-02-02)	166
29.10	2.96.0 (2023-02-01)	166
29.11	2.95.0 (2023-01-24)	167

29.12	2.94.0 (2022-12-12)	168
29.13	2.93.0 (2022-12-06)	168
29.14	2.92.3 (2022-12-02)	168
29.15	2.92.2 (2022-12-01)	168
29.16	2.92.1 (2022-12-01)	169
29.17	2.92.0 (2022-11-29)	169
29.18	2.91.1 (2022-11-18)	170
29.19	2.91.0 (2022-11-17)	170
29.20	2.90.1 (2022-11-04)	170
29.21	2.90.0 (2022-11-03)	170
29.22	2.89.1 (2022-10-20)	170
29.23	2.89.0 (2022-10-20)	171
29.24	2.88.0 (2022-10-11)	171
29.25	2.87.2 (2022-09-23)	172
29.26	2.87.1 (2022-09-20)	172
29.27	2.87.0 (2022-09-20)	172
29.28	2.86.0 (2022-09-05)	173
29.29	2.85.0 (2022-07-26)	174
29.30	2.84.1 (2022-06-21)	174
29.31	2.84.0 (2022-06-20)	175
29.32	2.83.0 (2022-06-01)	176
29.33	2.82.2 (2022-04-28)	176
29.34	2.82.1 (2022-04-28)	177
29.35	2.82.0 (2022-04-27)	177
29.36	2.81.0 (2022-04-11)	178
29.37	2.80.0 (2022-04-05)	178
29.38	2.79.0 (2022-03-25)	179
29.39	2.78.0 (2022-03-22)	179
29.40	2.77.3 (2022-03-18)	179
29.41	2.77.2 (2022-03-15)	180
29.42	2.77.1 (2022-03-11)	180
29.43	2.77.0 (2022-03-09)	180
29.44	2.76.4 (2022-03-07)	181
29.45	2.76.3 (2022-02-09)	181
29.46	2.76.2 (2022-02-08)	181
29.47	2.76.1 (2022-02-07)	181
29.48	2.76.0 (2022-02-02)	182
29.49	2.75.0 (2022-01-07)	183
29.50	2.74.1 (2021-12-21)	183
29.51	2.74.0 (2021-12-17)	183
29.52	2.73.0 (2021-12-13)	184
29.53	2.72.0 (2021-11-16)	185
29.54	2.71.0 (2021-11-03)	185
29.55	2.70.0 (2021-11-02)	185
29.56	2.69.0 (2021-10-22)	186
29.57	2.68.1 (2021-10-21)	186
29.58	2.68.0 (2021-10-20)	186
29.59	2.67.0 (2021-10-12)	186
29.60	2.66.0 (2021-09-27)	187
29.61	2.65.0 (2021-09-21)	187
29.62	2.64.0 (2021-09-14)	188
29.63	2.63.0 (2021-09-03)	188
29.64	2.62.0 (2021-07-06)	189
29.65	2.61.1 (2021-06-28)	189

29.66 2.61.0 (2021-06-25)	189
29.67 2.60.0 (2021-06-25)	189
29.68 2.59.0 (2021-06-07)	190
29.69 2.58.0 (2021-05-20)	190
29.70 2.57.0 (2021-04-28)	191
29.71 2.56.0 (2021-04-27)	191
29.72 2.55.1 (2021-04-15)	191
29.73 2.55.0 (2021-04-09)	192
29.74 2.54.0 (2021-04-09)	192
29.75 2.53.1 (2021-04-07)	192
29.76 2.53.0 (2021-04-01)	192
29.77 2.52.0 (2021-03-25)	193
29.78 2.51.2 (2021-03-16)	193
29.79 2.51.1 (2021-03-05)	193
29.80 2.51.0 (2021-03-02)	194
29.81 2.50.0 (2021-02-19)	194
29.82 2.49.0 (2021-02-09)	194
29.83 2.48.1 (2021-02-05)	195
29.84 2.48.0 (2021-02-03)	195
29.85 2.47.2 (2021-01-28)	195
29.86 2.47.1 (2021-01-27)	196
29.87 2.47.0 (2021-01-26)	196
29.88 2.46.0 (2021-01-25)	196
29.89 2.45.0 (2021-01-10)	197
29.90 2.44.0 (2020-12-18)	197
29.91 2.43.1 (2020-12-10)	197
29.92 2.43.0 (2020-12-10)	198
29.93 2.42.0 (2020-12-04)	198
29.94 2.41.2 (2020-11-27)	198
29.95 2.41.1 (2020-11-25)	198
29.96 2.41.0 (2020-11-25)	198
29.97 2.40.1 (2020-11-23)	199
29.98 2.40.0 (2020-11-18)	199
29.99 2.39.1 (2020-10-28)	199
29.1002.39.0 (2020-10-27)	200
29.1012.38.6 (2020-10-20)	200
29.1022.38.5 (2020-10-20)	200
29.1032.38.4 (2020-10-16)	200
29.1042.38.3 (2020-10-05)	201
29.1052.38.2 (2020-09-24)	201
29.1062.38.1 (2020-09-22)	201
29.1072.38.0 (2020-09-21)	201
29.1082.37.0 (2020-09-16)	202
29.1092.36.1 (2020-09-04)	202
29.1102.36.0 (2020-09-01)	202
29.1112.35.1 (2020-08-24)	202
29.1122.35.0 (2020-08-21)	202
29.1132.34.0 (2020-07-10)	203
29.1142.33.13 (2020-07-01)	203
29.1152.33.12 (2020-06-23)	203
29.1162.33.11 (2020-06-05)	203
29.1172.33.10 (2020-06-02)	204
29.1182.33.9 (2020-06-02)	204
29.1192.33.8 (2020-05-22)	204

29.1202.33.7 (2020-05-18)	204
29.1212.33.6 (2020-05-14)	204
29.1222.33.5 (2020-05-13)	204
29.1232.33.4 (2020-05-04)	205
29.1242.33.3 (2020-04-28)	205
29.1252.33.2 (2020-04-28)	205
29.1262.33.1 (2020-04-28)	205
29.1272.33.0 (2020-04-28)	206
29.1282.32.11 (2020-03-17)	206
29.1292.32.10 (2020-03-11)	207
29.1302.32.9 (2020-03-06)	207
29.1312.32.8 (2020-03-05)	207
29.1322.32.7 (2020-03-02)	207
29.1332.32.6 (2020-02-28)	208
29.1342.32.5 (2020-02-18)	208
29.1352.32.4 (2020-02-12)	208
29.1362.32.3 (2020-01-27)	208
29.1372.32.2 (2020-01-09)	208
29.1382.32.1 (2019-12-20)	208
29.1392.32.0 (2019-12-13)	209
29.1402.31.0 (2019-12-06)	209
29.1412.30.0 (2019-11-26)	209
29.1422.29.15 (2019-11-12)	209
29.1432.29.14 (2019-11-04)	209
29.1442.29.13 (2019-10-30)	210
29.1452.29.12 (2019-10-23)	210
29.1462.29.11 (2019-10-17)	210
29.1472.29.10 (2019-10-08)	210
29.1482.29.9 (2019-10-02)	211
29.1492.29.8 (2019-09-26)	211
29.1502.29.7 (2019-09-25)	211
29.1512.29.6 (2019-09-19)	211
29.1522.29.5 (2019-09-13)	211
29.1532.29.4 (2019-09-09)	212
29.1542.29.3 (2019-08-28)	212
29.1552.29.2 (2019-08-28)	212
29.1562.29.1 (2019-08-26)	212
29.1572.29.0 (2019-08-20)	213
29.1582.28.0 (2019-08-09)	213
29.1592.27.12 (2019-07-22)	213
29.1602.27.11 (2019-07-17)	213
29.1612.27.10 (2019-07-10)	214
29.1622.27.9 (2019-07-01)	214
29.1632.27.8 (2019-06-28)	214
29.1642.27.7 (2019-06-26)	214
29.1652.27.6 (2019-06-04)	215
29.1662.27.5 (2019-05-29)	215
29.1672.27.4 (2019-05-27)	215
29.1682.27.3 (2019-05-23)	215
29.1692.27.2 (2019-05-14)	215
29.1702.27.1 (2019-05-06)	216
29.1712.27.0 (2019-05-02)	216
29.1722.26.5 (2019-04-19)	216
29.1732.26.4 (2019-04-18)	216

29.1742.26.3 (2019-04-12)	216
29.1752.26.2 (2019-04-10)	217
29.1762.26.1 (2019-04-03)	217
29.1772.26.0 (2019-04-01)	217
29.1782.25.3 (2019-03-26)	217
29.1792.25.2 (2019-03-26)	217
29.1802.25.1 (2019-03-25)	218
29.1812.25.0 (2019-03-25)	218
29.1822.24.8 (2019-03-15)	218
29.1832.24.7 (2019-03-13)	218
29.1842.24.6 (2019-03-07)	218
29.1852.24.5 (2019-03-06)	219
29.1862.24.4 (2019-03-01)	219
29.1872.24.3 (2019-02-28)	219
29.1882.24.2 (2019-02-26)	219
29.1892.24.1 (2019-02-12)	219
29.1902.24.0 (2019-01-28)	220
29.1912.23.0 (2019-01-24)	220
29.1922.22.10 (2019-01-09)	220
29.1932.22.9 (2019-01-09)	220
29.1942.22.8 (2019-01-03)	221
29.1952.22.7 (2019-01-03)	221
29.1962.22.6 (2019-01-02)	221
29.1972.22.5 (2018-12-19)	221
29.1982.22.4 (2018-12-19)	221
29.1992.22.3 (2018-12-14)	221
29.2002.22.2 (2018-12-10)	222
29.2012.22.1 (2018-11-27)	222
29.2022.22.0 (2018-11-27)	222
29.2032.21.1 (2018-09-18)	222
29.2042.21.0 (2018-09-04)	223
29.2052.20.1 (2018-07-16)	223
29.2062.20.0 (2018-06-27)	223
29.2072.19.1 (2018-05-28)	224
29.2082.19.0 (2018-05-22)	224
29.2092.18.5 (2018-05-07)	224
29.2102.18.4 (2018-05-02)	224
29.2112.18.3 (2018-04-27)	224
29.2122.18.2 (2018-04-27)	225
29.2132.18.1 (2018-03-26)	225
29.2142.18.0 (2018-03-22)	225
29.2152.17.3 (2018-03-23)	226
29.2162.17.2 (2018-02-07)	226
29.2172.17.1 (2018-02-02)	226
29.2182.17.0 (2018-01-15)	227
29.2192.16.1 (2018-01-10)	227
29.2202.16.0 (2017-12-21)	227
29.2212.15.2 (2017-09-28)	227
29.2222.15.1 (2017-08-23)	228
29.2232.15.0 (2017-07-13)	228
29.2242.14.3 (2017-07-03)	228
29.2252.14.2 (2017-06-21)	228
29.2262.14.1 (2017-06-22)	229
29.2272.14.0	229

29.2282.13.0 (2017-03-02)	229
29.2292.12.0 (2017-02-16)	229
29.2302.11.5 (2017-02-06)	230
29.2312.11.4 (2017-02-01)	230
29.2322.11.3 (2016-11-15)	230
29.2332.11.2 (2016-09-15)	230
29.2342.11.1 (2016-08-17)	231
29.2352.11.0 (2016-08-02)	231
29.2362.10.4 (2016-05-19)	231
29.2372.10.3 (2016-05-11)	232
29.2382.10.2 (2016-04-12)	232
29.2392.10.1 (2016-03-17)	232
29.2402.10.0 (2016-03-03)	232
29.2412.9.3 (2016-02-25)	233
29.2422.9.2 (2016-02-17)	233
29.2432.9.1 (2016-02-10)	233
29.2442.9.0 (2016-02-04)	233
29.2452.8.1 (2016-01-29)	234
29.2462.8.0 (2016-01-28)	234
29.2472.7.2 (2016-01-26)	234
29.2482.7.1 (2016-01-18)	234
29.2492.7.0 (2016-01-14)	235
29.2502.6.0 (2015-12-30)	235
29.2512.5.2 (2015-12-29)	235
29.2522.5.1 (2015-12-18)	235
29.2532.5.0 (2015-12-08)	236
29.2542.4.4 (2015-12-02)	236
29.2552.4.3 (2015-11-27)	236
29.2562.4.2 (2015-11-26)	236
29.2572.4.1 (2015-11-25)	236
29.2582.4.0 (2015-11-18)	237
29.2592.3.0 (2015-11-09)	237
29.2602.2.0 (2015-10-09)	237
29.2612.1.0 (2015-09-29)	238
29.2622.0.0 (2015-07-20)	238
29.2630.35.1 (2015-07-17)	239
29.2640.35.0 (2015-07-10)	239
29.2650.34.0 (2015-05-20)	239
29.2660.33.4 (2015-04-07)	240
29.2670.33.3 (2015-04-01)	240
29.2680.33.2 (2015-04-01)	240
29.2690.33.1 (2015-03-25)	240
29.2700.33.0 (2015-03-25)	240
29.2710.32.2 (2015-03-06)	241
29.2720.32.1 (2015-03-04)	241
29.2730.32.0 (2015-03-04)	241
29.2740.31.0 (2015-03-02)	241
29.2750.30.0 (2015-02-19)	242
29.2760.29.0 (2015-02-04)	242
29.2770.28.8 (2014-12-22)	243
29.2780.28.7 (2014-12-22)	243
29.2790.28.6 (2014-12-18)	243
29.2800.28.5 (2014-12-09)	243
29.2810.28.4 (2014-11-21)	244

29.2820.28.3 (2014-11-12)	244
29.2830.28.2 (2014-11-05)	244
29.2840.28.1 (2014-11-05)	245
29.2850.28.0 (2014-11-04)	245
29.2860.27.2 (2010-10-14)	246
29.2870.27.1 (2010-10-13)	246
29.2880.27.0 (2010-10-09)	247
29.2890.26.3 (2014-09-15)	248
29.2900.26.2 (2014-08-22)	248
29.2910.26.1 (2014-08-21)	248
29.2920.26.0 (2014-08-21)	248
29.2930.25.2 (2014-08-14)	249
29.2940.25.1 (2014-08-01)	249
29.2950.25.0 (2014-08-01)	249
29.2960.24.3 (2014-06-27)	250
29.2970.24.2 (2014-06-27)	250
29.2980.24.1 (2014-06-26)	250
29.2990.24.0 (2014-06-23)	251
29.3000.23.5 (2014-06-19)	253
29.3010.23.4 (2014-06-18)	253
29.3020.23.3 (2014-06-18)	253
29.3030.23.2 (2014-06-13)	253
29.3040.23.1 (2014-05-22)	254
29.3050.23 (2014-05-22)	254
29.3060.22.6 (2014-04-27)	256
29.3070.22.5 (2014-03-19)	257
29.3080.22.4 (2014-03-06)	257
29.3090.22.3 (2014-02-17)	258
29.3100.22.2 (2014-02-14)	258
29.3110.22.1 (2014-02-13)	258
29.3120.22 (2014-02-12)	258
29.3130.21.2 (2014-02-04)	260
29.3140.21.1 (2013-12-11)	260
29.3150.21 (2013-11-28)	260
29.3160.20.9 (2013-10-30)	261
29.3170.20.8 (2013-10-22)	261
29.3180.20.7 (2013-10-16)	262
29.3190.20.6 (2013-10-14)	262
29.3200.20.5 (2013-10-09)	262
29.3210.20.4 (2013-10-09)	262
29.3220.20.3 (2013-09-30)	263
29.3230.20.2 (2013-08-27)	263
29.3240.20.1 (2013-08-26)	263
29.3250.20 (2013-08-23)	263
29.3260.19.1 (2013-07-15)	265
29.3270.19 (2013-07-12)	265
29.3280.18 (2013-06-06)	266
29.3290.17 (2013-05-17)	266

OVERVIEW

1.1 Interface

1.1.1 Modules

Geotrek est composé de différents modules.

Gestion des sentiers :

- Tronçons (linéaire entre 2 intersections)
- Sentiers (groupe de tronçons)
- Statuts (physique, foncier, organismes ayant la compétence sentiers, gestionnaires des travaux et de la signalétique)
- Aménagements (ouvrages et équipements)
- Signalétique
- Interventions (travaux)
- Chantiers (groupe d'interventions)

Valorisation de l'offre touristique :

- Sites outdoor (sites d'escalade, rivières, aires de vol libre...)
- Parcours outdoor (voie d'escalade, parcours d'eau vive...)
- Itinéraires (randonnées)
- POI (points d'intérêt patrimoniaux)
- Services (informations pratiques comme les points d'eau, passages délicats... selon la typologie que vous souhaitez)
- Contenus touristiques (hébergements, restaurants, services, activités de pleine nature, musées, produits labellisés... Vous pouvez créer les catégories que vous souhaitez)
- Evènements touristiques (animations, expositions, sorties...)
- Signalements (problèmes signalés par les internautes sur un itinéraire depuis Geotrek-rando)
- Zones de sensibilité (module non activé par défaut permettant de gérer des zones de sensibilité de la faune sauvage pour les afficher sur Geotrek-rando ou les diffuser avec l'API de Geotrek-admin)

Chaque module est accessible depuis le bandeau vertical.

Tous les modules sont construits de la même façon :

- une liste paginée des objets du module
- la possibilité de filtrer la liste ou de faire une recherche libre
- la possibilité d'exporter les résultats en CSV (pour EXCEL ou CALC), en SHAPEFILE (pour QGIS ou ArcGIS) et en GPX (pour l'importer dans un GPS)
- une carte dans laquelle il est possible de naviguer (déplacer, zoomer), d'afficher en plein écran, de mesurer une longueur, d'exporter une image de la carte, de réinitialiser l'étendue, de zommer sur une commune ou un secteur et de choisir les couches à afficher



Au survol d'un objet dans la liste, celui-ci est mis en surbrillance sur la carte.

Au survol d'un objet sur la carte, celui-ci est mis en évidence dans la liste.

La liste des résultats est filtrée en fonction de l'étendue de la carte affichée.

C'est aussi depuis un module qu'il est possible d'ajouter de nouveaux objets.

Un clic sur un objet dans la liste ou la carte permet d'accéder à la fiche détaillée de celui-ci.

1.1.2 Fiches détails

A partir de chaque module, il est possible d'afficher la fiche détail d'un objet en cliquant sur celui-ci dans la liste ou la carte du module. Les objets de chaque module peuvent ainsi être affichés individuellement dans une fiche détail pour en consulter tous les attributs, tous les objets des autres modules qui intersectent l'objet, les fichiers qui y sont attachés et l'historique des modifications de l'objet.

Depuis la fiche détail d'un objet, il est aussi possible d'exporter celui-ci au format ODT, DOC ou PDF.

Selon les droits dont dispose l'utilisateur connecté, il peut alors modifier l'objet.

**CHAPTER
TWO**

SCREENCASTS

(In French)

- Présentation de l'interface :
- Création d'un itinéraire :
- Création d'un POI :
- Ajout de photos :
- Administration :

EDITION D'UN OBJET

3.1 Segmentation dynamique

Certains objets sont saisis et stockés relativement aux tronçons, en utilisant la segmentation dynamique. Il s'agit des objets suivants : sentiers, statuts, amménagements, interventions, itinéraires et POI. Tous les autres objets sont indépendants et ont leur propre géométrie.

C'est pourquoi, modifier un tronçon peut entraîner des modifications des objets qui lui sont rattachés (interventions, itinéraires, POIs...). Supprimer un tronçon, supprime les objets qui lui sont rattachés par segmentation dynamique.

Les éléments ponctuels et linéaires des différents modules sont stockés sous forme d'évènements (PKdebut, PKfin et décalage dans la table `geotrek.core_topology`) liés à un ou plusieurs tronçons (`geotrek.core_pathaggregation`).

Un objet peut ainsi être associé à un ou plusieurs tronçons, partiellement ou entièrement.

Les objets ponctuels ne sont associés qu'à un seul tronçon, sauf dans le cas où ils sont positionnés à une intersection de tronçons.

Chaque évènement dispose néanmoins d'une géométrie calculée à partir de leur segmentation dynamique pour faciliter leur affichage dans Geotrek ou dans QGIS. Il ne faut néanmoins pas modifier directement ces géométries, elles sont calculées automatiquement quand on modifie l'évènement d'un objet.

3.2 Snapping - Aimantage - Accrochage

Quand vous créez un objet, il est possible de le snapper (aimanter) aux objets existants. C'est notamment utile pour bien raccorder les tronçons entre eux. Quand vous raccrochez un tronçon à un tronçon existant, ce dernier est coupé automatiquement à la nouvelle intersection.

Les fonctions d'aimantage ne sont pas disponibles lors de la création d'un nouvel objet (linéaire ou ponctuel). Il faut commencer par le créer sur puis le modifier pour disposer des fonctionnalités d'aimantage, activé automatiquement lorsque l'on se rapproche d'un objet existant. Par défaut la distance d'imantage est de 30 pixels mais elle est modifiable en configuration avancée.

MODULES DE GESTION

Geotrek-admin comporte un certain nombre de modules de gestion des sentiers (tronçons, sentiers, statuts, aménagements, signalétique, interventions et chantiers).

Les tronçons sont les éléments de base sur lesquels s'appuient l'ensemble des objets des autres modules, en utilisant la segmentation dynamique (<https://makina-corpus.com/blog/metier/2014/la-segmentation-dynamique>).

Les modules signalétique et aménagement ont initialement été conçus dans une logique d'inventaire avec des possibilités de description basiques et génériques. Pour tout complément, il est possible d'attacher un ou plusieurs fichiers joints à chaque objet (photos, PDF, tableurs...).

Les modules interventions et chantiers ont été conçus de façon à permettre à la fois un inventaire et un suivi des travaux (prévisionnel, administratif et financier).

En termes de structuration, le choix initial a été de concevoir, sur le volet gestion, la gestion des valeurs des listes déroulantes structure par structure pour que chaque structure travaillant sur une même Geotrek-admin puisse avoir des typologies différentes (types de signalétique, d'aménagements, d'organismes...). Néanmoins depuis la version 2.20 de Geotrek-admin, il est possible de partager des typologies entre les différentes structures en ne renseignant pas ce champ. Un compte utilisateur appartenant à une structure X n'aura accès qu'aux typologies associées à celle-ci, ainsi qu'aux typologies partagées. De même, ce compte utilisateur ne pourra pas modifier ou supprimer des objets appartenant à une autre structure (c'est-à-dire créés par un compte utilisateur appartenant à une autre structure), sauf à avoir des permissions particulières.

Lors de la saisie d'un objet sur la carte, il est possible d'afficher une couche SIG ou un relevé GPX sur la carte lors de la création d'un objet sur la carte pour pouvoir le visualiser et le localiser sur la carte (Charger un fichier local (GPX, KML, GeoJSON)).

4.1 Les tronçons

C'est le socle essentiel et central de Geotrek. Un tronçon est un objet linéaire, entre 2 intersections. Le mécanisme de segmentation dynamique permet de ne pas devoir le recouper pour y rattacher des informations.

Ils peuvent être numérisés dans Geotrek-admin, mais il est conseillé de les importer, directement en SQL dans la base de données ou depuis QGIS (<https://makina-corpus.com/blog/metier/2014/importer-une-couche-de-troncons-dans-geotrek>).

Si ils sont numérisés directement dans Geotrek-admin, il est possible d'afficher sur la carte un fichier GPX ou GeoJSON pour faciliter leur localisation.

Quand un nouveau tronçon intersecte un tronçon existant, ce dernier est découpé automatiquement à la nouvelle intersection.

En plus de leur géométrie, quelques informations peuvent être associées à chaque tronçon (nom, départ, arrivée, confort, source, enjeu d'entretien, usage et réseaux).

Comme pour les autres objets, les informations altimétriques sont calculées automatiquement grâce au MNT présent dans la base de données.

Idem pour les intersections automatiques avec les zonages (communes, secteurs, zonages réglementaires) et les objets des autres modules qui sont intersectés automatiquement à chaque ajout ou modification d'un objet.

Comme pour tous les modules, il est possible d'exporter la liste des tronçons affichés (CSV, SHP ou GPX) ou bien la fiche complète d'un tronçon (ODT, DOC ou PDF).

Comme pour tous les modules, il est aussi possible d'attacher des documents à chaque tronçon depuis sa fiche détail (images, PDF, tableurs, ZIP...).

Enfin, toujours depuis la fiche détail d'un tronçon, il est possible d'en afficher l'historique des modifications.

4.2 Les sentiers

Il s'agit d'un ensemble linéaire composés d'un ou plusieurs tronçons (entiers ou partiels) grâce à la segmentation dynamique.

Les sentiers permettent d'avoir une vision de gestionnaire sur un linéaire plus complet que les tronçons (qui sont découpés à chaque intersection) pour en connaître les statuts, la signalétique, les aménagements, les interventions ainsi que les itinéraires et POI. Il est d'ailleurs possible d'ajouter une intervention sur un sentier complet directement depuis la fiche détail d'un sentier.

Ils permettent également de préciser une ou plusieurs certifications ainsi que leur statut.

A ne pas confondre avec le module Itinéraires qui permet de créer des randonnées publiées sur un portail Geotrek-rando.

4.3 Les statuts

Ils permettent de renseigner des informations sur le linéaire (type physique, statut foncier, organismes ayant la compétence sentiers, gestionnaires des travaux et de la signalétique) sans avoir à le faire tronçon par tronçon grâce à la segmentation dynamique qui permet de localiser le départ et l'arrivée sur un ou plusieurs tronçons.

4.4 Les aménagements

Ils permettent d'inventorier les aménagements sur les sentiers (passerelles, mains courantes, cunettes, soutenements, bancs, parkings...) en les localisant, les typant, les décrivant, renseignant leur état et leur année d'implantation.

Les types d'aménagement sont découpés en 2 catégories (Ouvrages et Equipements). Ce découpage n'est utilisé que pour filtrer les aménagements.

Il est possible de créer une intervention directement depuis la fiche détail d'un aménagement.

Comme pour les autres modules, il sont intersectés avec les autres modules pour en connaître l'altimétrie, les zonages (communes, réglementation...), les statuts (fonciers, physique, gestionnaire), les interventions, les itinéraires...

Il est aussi possible de les exporter, de leur attacher des fichiers (images, PDF, tableurs, ZIP...) et d'en consulter l'historique des modifications.

4.5 La signalétique

Centralise les informations sur la signalétique d'accueil, d'information et d'orientation des randonneurs. Permet de localiser, décrire l'implantation, et gérer les fichiers concernant la signalétique (BAT, maquettes, photos, etc.).

Pour une signalétique, il est possible de définir chaque lame et chaque ligne de lame. L'image ci-dessous montre un exemple de correspondance entre une signalétique terrain et sa saisie dans Geotrek.



Lames							
Code	Color	Direction	Status	Text	Picto	Distance	Time
30339/087/A	Orange	Sans Direction	Bon état	Prat Peyrot - Station			
30339/087/B1	Jaune	G	Bon état	Meyrueis	GR 6	17.0 km	4h25
				Camprieu		8.2 km	2h00
				L Espérou		3.9 km	1h10
30339/087/B2	Jaune	G	Bon état	Point Sublime		3.2 km	1h10
				Cascades de l'Hérault		2.9 km	0h50
30339/087/B3	Jaune	G	Bon état	Col de La Caumette		2.0 km	0h40
				Col de la Serreyrède	GR7 - GR60 - GR66	1.8 km	0h30
30339/087/C	Jaune	D	Bon état	Mont Aigoual		2.8 km	1h00
				La Draille		1.2 km	0h25
				Parking	GR6 - GR7 - GR60	0.3 km	0h05
30339/087/D	Jaune	G	Bon état	Draille de Calcadis		0.7 km	0h15
30339/087/E	Jaune	G	A remplacer (dégradé, manquant)	Flèche gauche			
				Picto	Equestre		
30339/087/F	Jaune	G	A remplacer (dégradé, manquant)	Balise VTT	VTT		
				3 bleu			

+ Ajouter une lame

4.6 Les interventions

Les interventions permettent d'inventorier et suivre les travaux réalisés sur les sentiers. Chaque intervention correspond à une action sur un tronçon, sentier, aménagement ou signalétique.

Les interventions peuvent être localisées directement sur le linéaire de tronçon en les positionnant grâce à la segmentation dynamique. Ou bien ils peuvent correspondre à un sentier, un aménagement ou une signalétique en les créant depuis leur fiche détail.

Une intervention peut être souhaitée (demandée par un agent), planifiée (validée mais à réaliser) ou réalisée.

Un enjeu peut être renseigné pour chaque intervention. Il est calculé automatiquement si un enjeu a été renseigné au niveau du tronçon auquel l'intervention se raccroche.

Chaque intervention correspond à un type. On peut aussi renseigner si celle-ci est sous-traitée, les désordres qui en sont la cause, la largeur et la hauteur. La longueur est calculée automatiquement si il s'agit d'une intervention linéaire mais est saisie si il s'agit d'une intervention ponctuelle.

Plusieurs interventions peuvent être rattachées à un même chantier pour avoir une vision globale de plusieurs interventions correspondant à une opération commune.

L'onglet Avancé du formulaire permet de renseigner des informations financières sur chaque intervention (coût direct et indirect lié au nombre de jours/agents dissocié par fonction).

4.7 Les chantiers

Les chantiers permettent de grouper plusieurs interventions pour en avoir une vision globale et d'y renseigner globalement des informations administratives (Contraintes, financeurs, prestataires, cout global, maîtrise d'ouvrage...) et éventuellement d'y attacher des documents (cahier des charges, recette, plans...).

Leur géométrie est la somme des géométries des interventions qui les composent.

VALORISATION DES SENTIERS

5.1 Itinérance

Il est possible de créer des randonnées itinérantes (sur plusieurs jours) et d'y associer des étapes comme sur cet exemple : <http://www.grand-tour-ecrins.fr/a-pied/tour-de-la-berarde/>.

Pour cela il faut créer un itinéraire parent (séjour itinérant complet) puis y ajouter des itinéraires enfants (étapes) de manière ordonnée, dans le champs *Enfants* présent dans l'onglet *Avancé* du formulaire itinéraire du séjour complet.

Le séjour complet ainsi que chaque étape sont donc chacunes des randonnées comme les autres. La seule différence est que les étapes (itinéraires enfants) sont rattachées à l'itinéraire parent.

Si vous ne souhaitez pas que les étapes soient affichées dans la page de Recherche de Geotrek-rando, il ne faut pas les publier. Il suffit alors de publier l'itinéraire parent, pour que toutes les étapes qui y sont rattachées apparaissent uniquement dans sa fiche détail de Geotrek-rando.

5.2 Points de référence

Lorsque l'on localise un itinéraire, il est aussi possible de localiser le parking de la randonnée et de placer des points de référence numérotées sous forme de puces rouges sur la carte.

Ces derniers servent à y faire référence dans le champs Description de l'itinéraire (Pas à pas) :


RETOUR À LA CARTE

Vincent, Saint-Martin-de-Queyrières, Vallouise

Ce parcours de trail permet de réaliser un tour complet du Pays des Ecrins à travers les différentes vallées qui composent le territoire !

- 1 La première étape traverse la vallée de la Durance pour monter en direction du Montbrison afin de basculer sur la vallée de Vallouise. Le parcours se poursuit en passant par le col de Vallouise et jusqu'à Ailefroide tout en profitant d'une vue imprenable sur le Pelvoux. La traversée d'Ailefroide permet de découvrir cet ancien hameau d'alpage qui a conservé tout son charme, entouré de hautes murailles de granite. Cette étape se termine en longeant le Gyr pour atteindre Vallouise.
- 2 L'étape suivante débute à Vallouise pour rejoindre Puy Saint Vincent. Après le passage entre les mélèzes au Col de la Pousterle, il faut traverser deux nouvelles vallées sauvages,

Pour que des puces numérotées sous forme de pastilles rouges soient affichées dans la description, il suffit de les saisir en tant que Liste numérotées dans le champs Description :

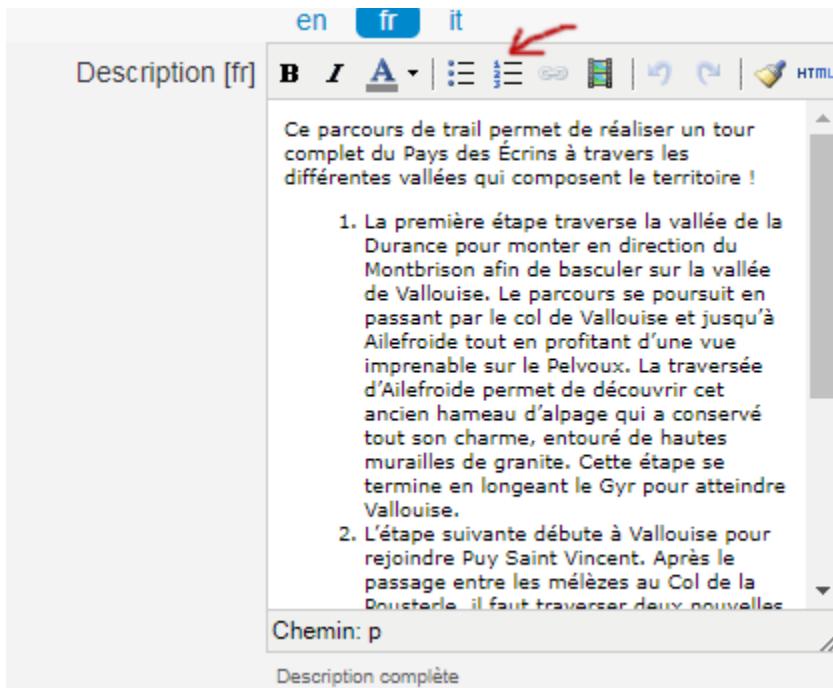

5.3 Ordre des catégories

Dans le portail Geotrek-rando, les différents types de contenus sont éclatés en catégories.

Pour définir leur ordre d'affichage, il est possible de le définir dans la base de données pour certains contenus (ordre des pratiques et des catégories de contenus touristiques) en renseignant leur champs `ordre` depuis l'Adminsite de Geotrek-admin.

Pour l'ordre d'affichage des catégories Randonnées, Itinérance et Evènements touristiques, il est possible de modifier les valeurs par défaut définies dans le fichier `geotrek/settings/base.py` en surcouchant les paramètres correspondant dans le fichier de configuration avancée `geotrek/settings/custom.py` :

- `TREK_CATEGORY_ORDER = 1`
- `ITINERANCY_CATEGORY_ORDER = 2`
- `TOURISTIC_EVENT_CATEGORY_ORDER = 99`

Il est aussi possible d'éclater les randonnées pour que chaque pratique soit une catégorie en surcouchant le paramètre `SPLIT_TREKS_CATEGORIES_BY_PRACTICE = False`, d'éclater les types d'accessibilité en catégories avec le paramètre `SPLIT_TREKS_CATEGORIES_BY_ACCESSIBILITY = False` et de séparer les randonnées itinérantes dans une catégorie avec le paramètre `SPLIT_TREKS_CATEGORIES_BY_ITINERANCY = False`.

ACTIVITÉS OUTDOOR

6.1 Sites et parcours

Geotrek-admin dédie 2 modules aux activités outdoor : les sites et les parcours. Un site correspond à une zone ou à un réseau hydrographique à gérer et/ou à valoriser d'un seul tenant : site d'escalade, cours d'eau, zone de vol libre...

Les sites peuvent être subdivisés en sous-sites (dits enfants), qui peuvent eux-mêmes être subdivisés en sous-sites : secteurs d'escalade (groupe de blocs ou falaise), aires de décollage ou d'atterrissage...

Chaque site (ou sous-site) peut contenir différents parcours : voie d'escalade, parcours d'eau vive...

Il est possible de regrouper un enchaînement de parcours sous forme d'un parcours particulier appelé itinérance : grande voie d'escalade, enchainement entre différentes pratiques...

Les 2 modules outdoor permettent de :

- Lister, filtrer, créer, modifier et exporter des sites et des parcours outdoor de manière générique pour gérer tout type de pratiques (escalade, alpinisme, via ferrata, canyoning, kayak, vol libre, plongée...)
- Ajouter les pratiques que l'on souhaite de manière générique, et de définir leurs propres types et leurs propres niveaux et valeurs de cotation
- Lier des sites entre eux de manière hiérarchisée, pour avoir des sites, des sous-sites, des sous-sous-sites... Par exemple pour un site global avec différentes pratiques, pour un site d'escalade avec des secteurs, des sous-secteurs...
- Agréger des informations au niveau d'un site, en fonction des sous-sites qui lui sont rattachés. Par exemple les pratiques d'un grand site outdoor sont l'agrégation des pratiques des sous-sites qui le composent
- Lier des parcours à des sites et leur appliquer une cotation en fonction de la pratique du site auquel ils sont rattachés
- Lier des parcours entre eux pour faire de l'itinérance avec une fiche mère et des fiches enfants (étapes), comme c'est déjà le cas pour les itinéraires
- Associer des aménagements aux sites (parking, toilettes, banc...) automatiquement par intersection géographique
- Associer des interventions à des sites ou parcours, automatiquement par intersection géographique, ou explicitement en passant par le site ou le parcours sur lequel l'intervention a été réalisée
- Associer des POI à un site ou parcours, automatiquement par intersection géographique
- Associer des accès au site, automatiquement par intersection géographique des itinéraires à proximité

6.1.1 Arborescence

Les fiches détail des sites et des parcours présentent les liens entre eux sous forme d'une arborescence. Pour ne pas surcharger, tous les éléments ne sont pas repris, mais uniquement :

- le site/parcours courant,
- le site auquel il appartient (parent), ainsi que le grand-parent, etc. jusqu'à remonter au plus haut niveau,
- les différents sous-sites et/ou parcours (enfants) le cas échéant.

Des liens permettent d'ajouter des sites ou parcours en les positionnant directement dans l'arborescence.

6.2 Nomenclatures

En déroulant le menu en haut à droite de l'écran et en cliquant sur « Admin » il est possible de modifier les nomenclatures.

- Filières : elles servent à regrouper les pratiques pour pouvoir filtrer rapidement les sites ou parcours. Par exemple la filière « eau vive » peut regrouper « kayak » et « canyoning ».
- Pratiques : les pratiques sportives. Vous pouvez préciser à quelle filière elle appartient.
- Types de sites : ces catégories permettent d'étiqueter et de filtrer les sites. Elles sont spécifiques à chaque pratique. Par exemple « Site école » pour l'escalade.
- Échelle de cotation : permet de regrouper les cotations faisant partie de la même échelle. Elles sont spécifiques à chaque pratique.

6.3 Filières

6.3.1 Escalade

La notion de site est naturelle. Elle peut être définie géographiquement par un polygone. Il est possible (mais pas obligatoire) de créer des sous-sites pour représenter des secteurs. Ou pour des falaises, elles-mêmes divisées en sous-sous sites pour les différents secteurs.

Chaque voie correspond à un parcours. La voie étant verticale et la carte horizontale, le plus pertinent est de définir géographiquement la voie par un simple point. Une grande voie peut être décrite simplement par un parcours mais, pour plus de détails, il est également possible de créer autant de parcours que de longueurs dans la grande voie. Lors de la saisie de la grande voie, il faudra préciser les différentes longueurs dans le champ « Enfants », dans le bon ordre. Le nom de chaque longueur pourra reprendre le nom de la voie suffixé par « longueur 1 », « longueur 2 », etc.

6.3.2 Vol libre

La zone de vol n'est pas définie géographiquement de manière précise mais fait quand même l'objet d'un site avec un nom (ex: « massif de ... ») et un polygone approximatif ou bien un point (de préférence celui de départ). Cela n'a pas une importance déterminante. Ce qui compte c'est 1) de rendre cela lisible sur une carte et 2) d'être cohérent entre les différents sites.

Pour chaque zone de vol, les différentes aires de décollage et d'atterrissage sont définies à l'aide de sous-sites. Afin de les identifier, il faut créer les types de site « Aire de décollage » et « Aire d'atterrissage » pour la catégorie « Vol libre » dans la nomenclature et associer ces types aux aires. Comme le vol est libre, il n'est pas nécessaire de définir des parcours. Cependant, il est possible d'en définir pour donner des exemples de trajectoires.

6.3.3 Eau vive

Le site est généralement constitué par une rivière ou une portion de rivière. Il est possible d'y adjoindre des affluents. La géométrie du site est donc un linéaire correspondant à un réseau hydrographique.

Les aires d'embarquement/débarquement sont définies par des sous-sites. Leur géométrie peut être définie sous forme d'un point ou d'un polygone. Les parcours sont automatiquement attachés à une aire d'embarquement et une aire de débarquement qui sont les aires les plus proches respectivement du début et de la fin du parcours.

6.4 Représentation verticale : les vues HD


Pour aller au-delà de la localisation sur une carte dans la représentation des sites d'activité Outdoor, notamment celles verticales (escalade, via-ferrata, alpinisme...), nous avons la possibilité d'ajouter des photos très haute définition (gigapixel) sur les itinéraires, POI et sites outdoor, et d'annoter celles-ci pour les enrichir.

Le bloc "Vues HD" dans l'onglet "Fichier liés" permet d'associer une photo très haute définition (de plusieurs dizaines ou centaines de Mo) aux itinéraires, POI et sites Outdoor. Ces images sont tuilées automatiquement pour disposer de fichiers plus légers à charger dans un navigateur (en fonctionnant comme les fonds de carte tuilés).

Vues HD ?

Date de modification					
Fichier	Titre	Légende	Auteur	modification	Actions
	Le pic de Quelque part	Un pic majestueux	Auteur inconnu	9 Février 2023 17:22 <small>Creative Commons</small>	Détails Modifier Supprimer

Une fois l'image ajoutée, un formulaire d'annotation permet d'ajouter des objets (points, lignes, polygones, cercles...) et des textes pour enrichir les photos.

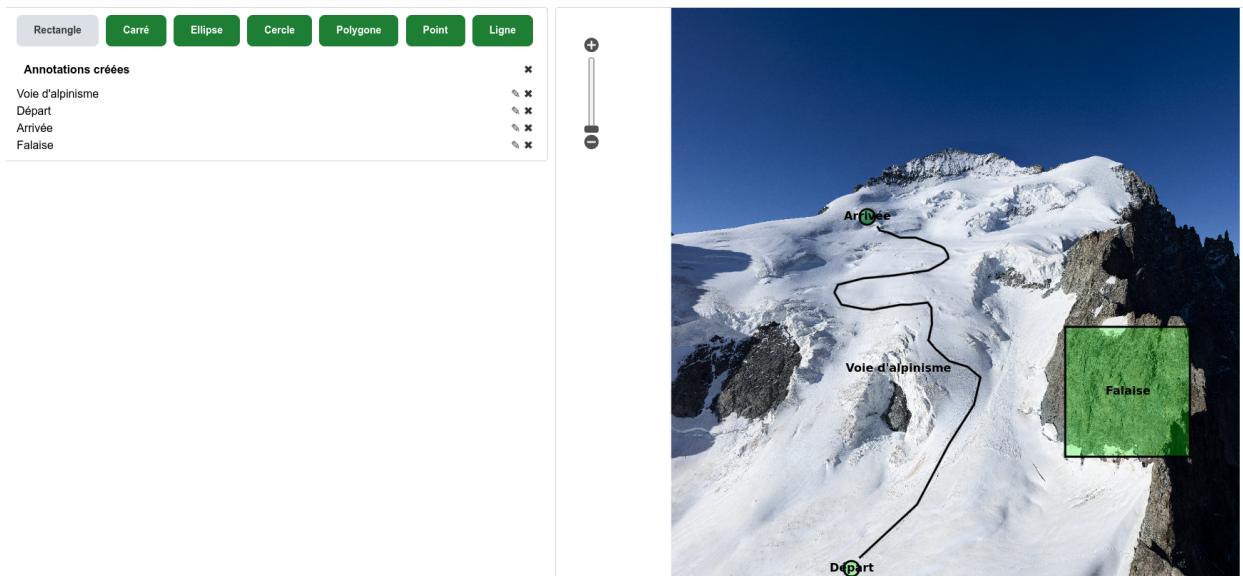

Les annotations sont stockées en GeoJSON et peuvent donc être affichées par dessus la photo tuilée dans une librairie javascript de cartographie (comme Leaflet ou GeoJS) au niveau de Geotrek-rando-v3 ou autre. Pour cela, l'APIv2 expose pour chaque Vue HD l'adresse de récupération des tuiles ainsi que les annotations GeoJSON.


La vue HD est également associée à une localisation correspondant à l'emplacement de ce que l'on voit sur l'image.

This screenshot shows the same annotations from the previous image but applied to a map. The annotations are identical: a black line for the climbing route, green labels for 'Arrivée', 'Voie d'alpinisme', 'Départ', and a green box for 'Falaise'. The map includes contour lines, stream names like 'Ruisseau de Longe', and place names like 'Prancière'. A zoom control (+/-) is visible on the left. Below the map is a smaller photo of the mountain with the same annotations overlaid.

CHAPTER SEVEN

PAGES STATIQUES

Les pages statiques sont les pages d'information et de contextualisation de votre portail web Geotrek-rando. Comme pourraient l'être les premières pages d'un topo-guide papier. Elles peuvent aussi être consultées dans votre application Geotrek-mobile.

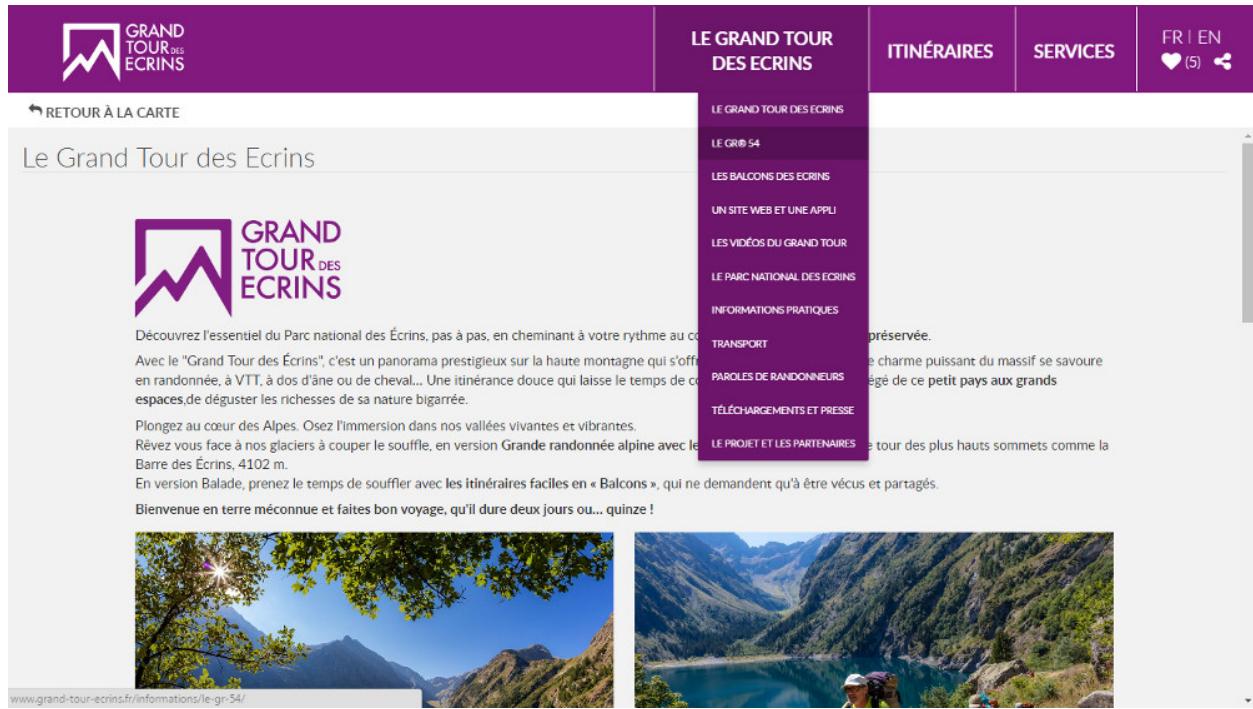


The screenshot shows a static page for 'Le Grand Tour des Ecrins'. At the top, there's a purple header bar with the logo 'GRAND TOUR DES ECRINS' and navigation links for 'ITINÉRAIRES', 'SERVICES', and language selection ('FR | EN'). Below the header, a sidebar on the right contains links to 'LE GRAND TOUR DES ECRINS', 'LE GR® 54', 'LES BALCONS DES ECRINS', 'UN SITE WEB ET UNE APPLI', 'LES VIDÉOS DU GRAND TOUR', 'LE PARC NATIONAL DES ECRINS', 'INFORMATIONS PRATIQUES', 'TRANSPORT', 'PAROLES DE RANDONNEURS', 'TÉLÉCHARGEMENTS ET PRESSE', and 'LE PROJET ET LES PARTENAIRES'. The main content area features a heading 'Le Grand Tour des Ecrins' and a sub-section with the same logo. It describes the tour as a panoramic trekking route through the Parc National des Ecrins, mentioning various modes of transport like walking, VTT, and horseback riding. It also highlights the 'Balcons' section and the project partners. Two photographs are displayed at the bottom: one showing a mountain peak through tree branches and another showing a hiker by a lake.

Fig. 1: Exemple de page statique (<http://www.grand-tour-ecrins.fr/informations/le-grand-tour-des-ecrins/>)

Elles permettent de fournir à l'internaute et futur randonneur des informations génériques : présentation de votre structure, votre projet de randonnée, recommandations, informations pratiques, etc.

Elles sont gérées depuis l'administe de Geotrek-admin et sont ensuite publiées sur Geotrek-rando à chaque synchronisation du contenu.

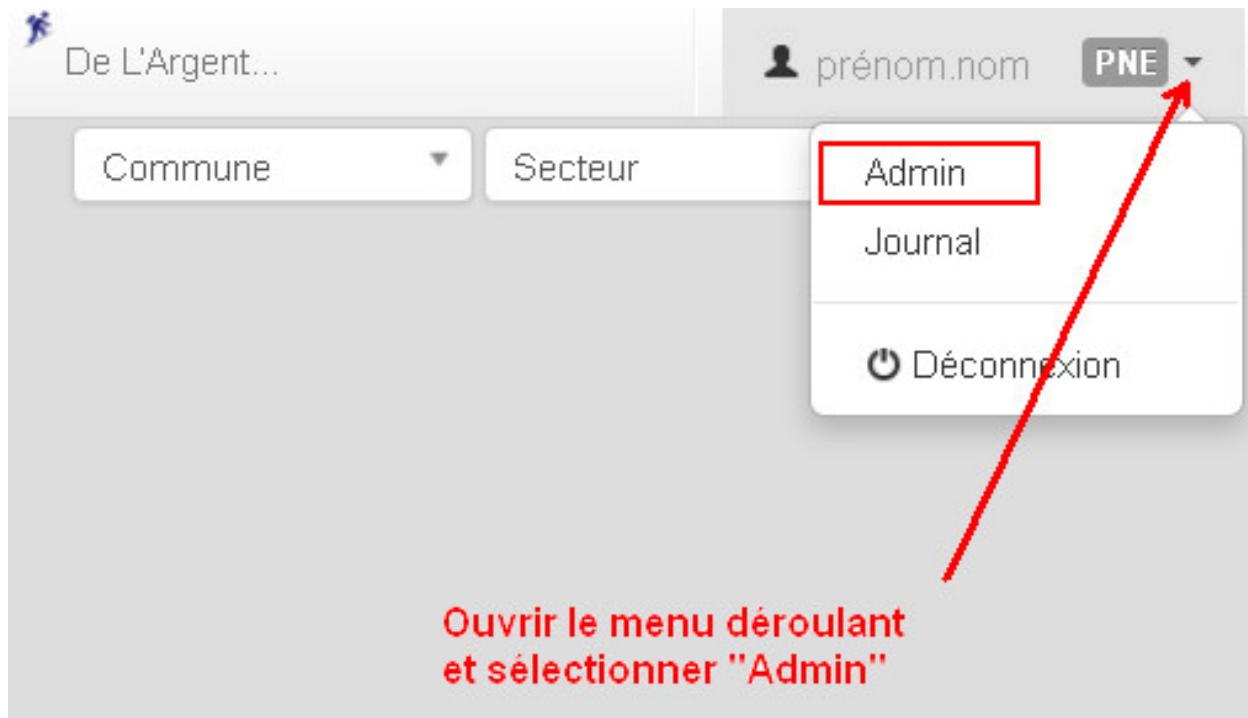

7.1 Créer une page statique

Depuis l'Adminsite de Geotrek, sélectionnez “Pages statiques” dans la rubrique “Flatpages”.

The screenshot shows a list of service types on the left and a central panel for managing static pages. The central panel has a red box around the 'PAGES STATIQUES' section. Inside this section, the 'Pages statiques' row is selected, indicated by a black arrow pointing to the 'Ajouter' button.

Types de service	
MAINTENANCE	
Domaines de chantier	+ Ajouter Modifier
Désordres	+ Ajouter Modifier
Fonctions	+ Ajouter Modifier
Prestataires	+ Ajouter Modifier
Statuts	+ Ajouter Modifier
Types d'intervention	+ Ajouter Modifier
Types de chantier	+ Ajouter Modifier

PAGES STATIQUES	
Pages statiques	+ Ajouter Modifier

RETOURS UTILISATEURS	
Catégories	+ Ajouter Modifier
Statut	+ Ajouter Modifier

SIGNALÉTIQUE	
Couleurs de lame	+ Ajouter Modifier
Directions	+ Ajouter Modifier

Vous accédez alors à la liste des pages statiques. Cliquer sur "Ajouter Page statique" en haut à droite de l'écran pour créer une première page.

7.2 Construire une page statique

Sélectionnez la langue du contenu que vous souhaitez saisir : en / fr / it...

Saisissez :

- un titre (sans guillemets, parenthèses, etc.)
- un ordre optionnel (pour définir l'ordre d'apparition dans le menu de votre Geotrek-rando)
- cochez « publié » lorsque vous souhaiterez mettre en ligne votre page
- définissez la « source » (comprendre ici la destination d'affichage et donc votre Geotrek-rando)
- sélectionnez une cible (Geotrek-rando et/ou Geotrek-mobile ou cachée pour créer une page qui ne sera pas listée dans le menu).

Attention, à chaque fois que cela vous est demandé, veillez à sélectionner la langue de votre contenu.

The screenshot shows the configuration interface for a static page. It includes fields for Title [fr], Order, Publication status (Publié), Source selection, and various language tabs (en, fr, it). A red arrow points to the 'Choix du gabarit de la page' (Layout choice) section, which contains a dropdown menu set to 'Tout' and a list of layout options: 12, 6-6, 4-4-4, 3-3-3-3, 2-2-2-2-2-2, 2-8-2, 4-8, 8-4, -Gabarit 1, and -Gabarit 2. To the right, there's a preview area labeled 'Appréçu avant publication' (Preview before publication) with a red arrow pointing to it. Below the preview are buttons for 'Annuler' (Cancel) and 'Créer' (Create). Another red arrow points to the 'Affichage du Code Source' (Display code source) button.


L'interface permet de construire sa page en responsive design, c'est-à-dire qu'il est possible de disposer les blocs de contenu pour s'adaptera aux différentes tailles d'écrans des utilisateurs.



Choisissez le gabarit sur lequel vous souhaitez construire votre page : 12 / 6-6 / 4-4-4 / etc. Ce sont des formats prédéfinis d'assemblage de blocs basés sur 12 colonnes qui occupent 100% de la largeur de l'écran (Bootstrap).


1	1	1	1	1	1	1	1	1	1	1	1
2		2		2		2		2		2	
3			3			3			3		
	4				4				4		
		6							6		
			8							4	

Vous pouvez aussi utiliser ou vous inspirer des 2 gabarits d'exemple (Gabarit 1 et Gabarit 2).

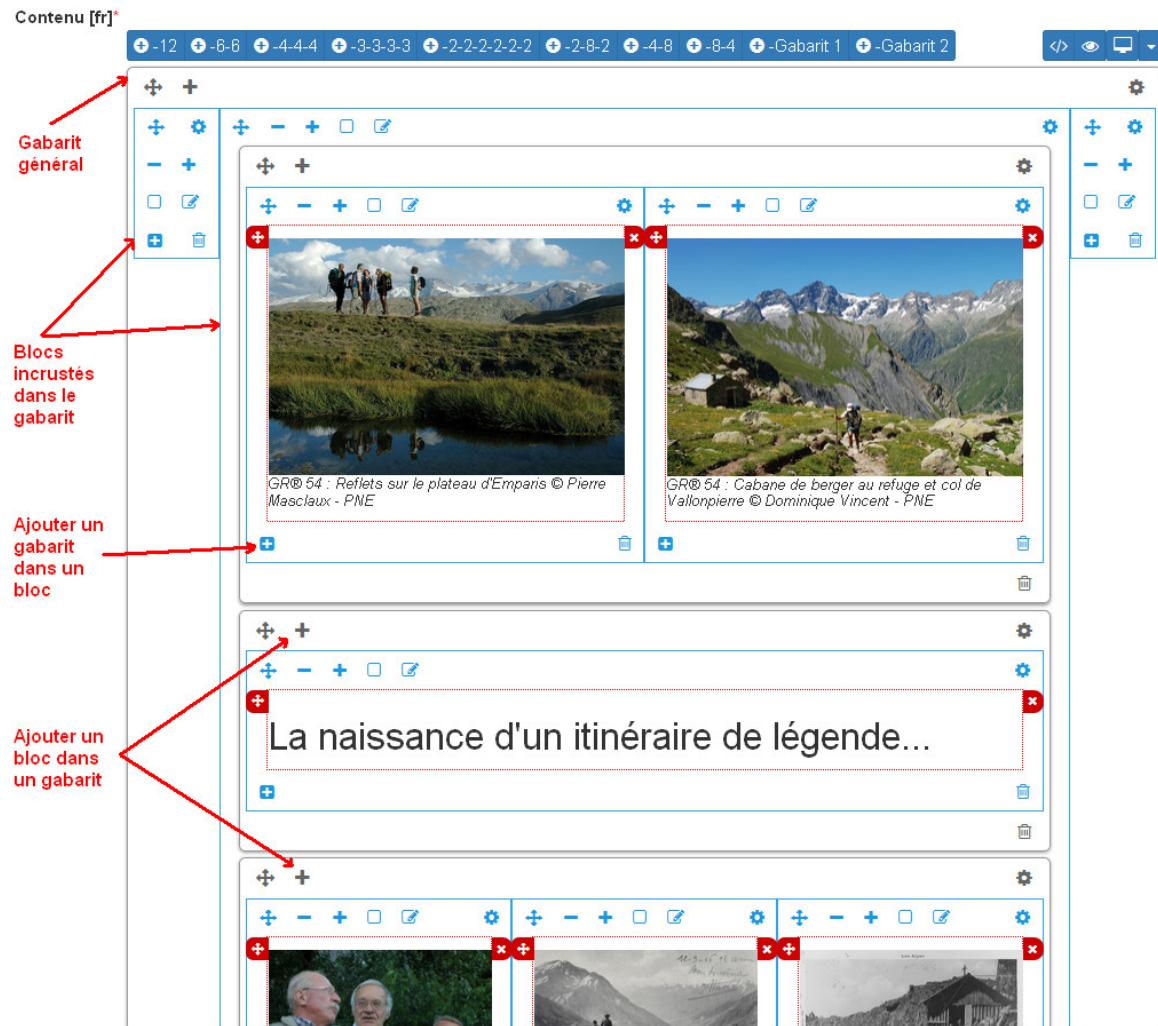

Vous pouvez ajouter autant de gabarits que vous le souhaitez sur une seule page.


Une fois que vous avez ajusté vos blocs de contenu pour un affiche sur ordinateur (Desktop), vous devez basculer sur l'affichage sur mobile (Phone) pour l'adapter à des plus petits écrans (en cliquant sur les + et - bleus de chaque bloc). Privilégiez alors des blocs sur une colonne faisant 100% de large.

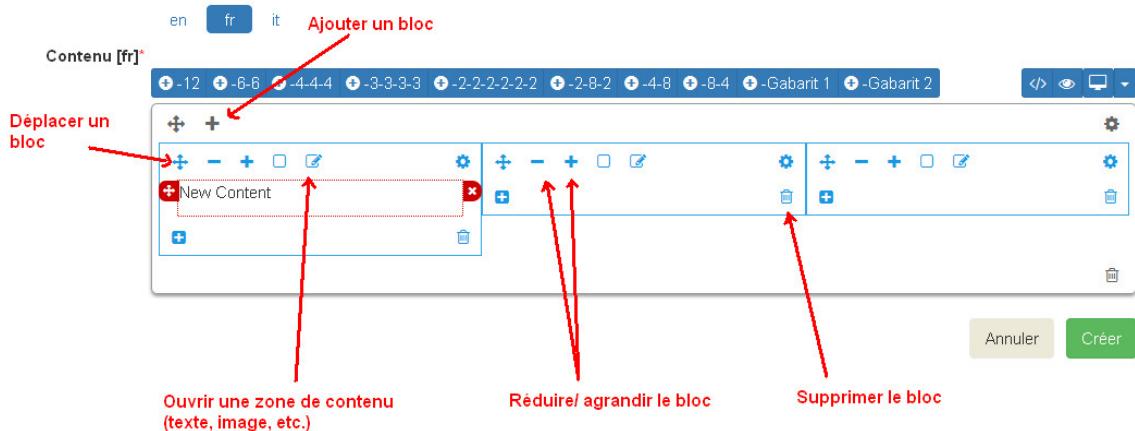

7.3 Ajouter du contenu dans un bloc

En cliquant dans la zone de texte, une barre d'édition apparaît. Sur un format classique comme dans les logiciels de traitement texte, plusieurs menus et outils sont alors disponibles :

- File : (fichier)
- Edit : retour, copier-coller,
- Insert : Insérer une image, un lien, des caractères spéciaux

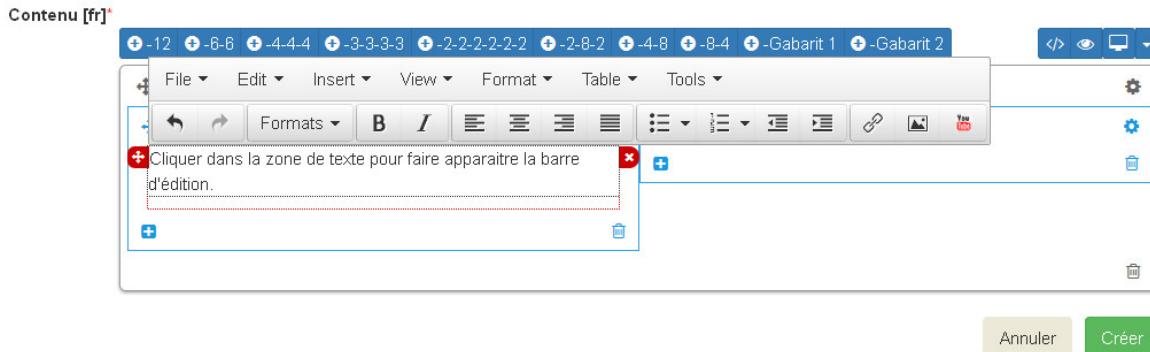

Insérer une image : cela ouvre une nouvelle fenêtre avec différents champs à remplir :

- Source : insérer l'URL de l'image (idéalement dans le répertoire /custom/public/images/ de votre Geotrek-rando)
- Image description : légender l'image pour optimiser son référencement
- Dimensions : ajuster le format et cocher « Constrain proportions »

Insérer un lien : cela ouvre une nouvelle fenêtre avec différents champs à remplir :

- URL : lien de destination
- Title : texte à afficher pour le lien
- Target : « New window » si vous souhaitez que le lien s'ouvre dans un nouvel onglet
- View : « Show blocks » permet de faire apparaître les différents paragraphes de votre texte. Elles sont utiles à la structure de votre texte.
- Format : gras, italique, souligner, etc. Le sous-menu « Formats » permet de choisir un style prédéfini pour les titres (Heading 1, Heading 2, etc.). Pour que le style s'applique uniquement au titre et non pas à tout le texte, faire un retour à la ligne et vérifier sa prise en compte en activant « Shox blocks ».
- Table : insertion de tableau
- Tools : Afficher le code source de la page

7.4 Astuces

1. Ne jamais utiliser la touche retour du clavier [?] sans avoir le curseur sélectionné dans une zone de texte. Cela équivaut à revenir à la page précédente et vous perdrez tout votre contenu sans le sauvegarder.
2. Pour reproduire une page dans une langue différente : copier le Code Source et coller-le Code Source de votre nouvelle langue. Nous n'aurez plus qu'à traduire votre texte ! Idem pour traduire un contenu dans une autre langue.
3. Si deux de vos pages ont le même numéro d'ordre d'apparition, une seule des deux sera affichée sur la plate-forme numérique.

PARAMÉTRAGE

8.1 Accès interface admin

Menu à droite > admin

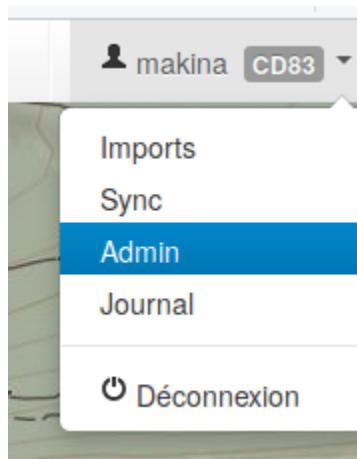


Fig. 1: Capture lien admin

8.2 Paramétrages des modules

8.2.1 Itinéraires

- Pratiques
- Accessibilités
- Niveaux de difficulté
- Thèmes
- Types de services
- Types de POIs

ITINÉRAIRE	
Accessibilités	Ajouter Modifier
Catégories liens web	Ajouter Modifier
Liens web	Ajouter Modifier
Niveaux de difficulté	Ajouter Modifier
Parcours	Ajouter Modifier
Pratiques	Ajouter Modifier
Réseaux randonnée	Ajouter Modifier
Types de POI	Ajouter Modifier
Types de service	Ajouter Modifier

Exemple : ajouter une pratique

- Dans admin, à la ligne “Pratiques” cliquer sur “+ ajouter”
- Remplir les champs (en gras les champs obligatoires)

(note : la couleur n'est utilisée que pour le mobile actuellement)

Ajout Pratique

Pictogramme :	<input type="button" value="Parcourir..."/> Aucun fichier sélectionné.
Nom [fr] :	<input type="text"/>
Nom [en] :	<input type="text"/>
Distance :	<input type="button" value=""/>
Les contenus et événements touristiques seront associés selon cette distance (mètres)	
Locomotion Cirkwi :	<input type="button" value="-----"/>
Ordre :	<input type="button" value=""/>
Ordre alphabétique si vide	
Couleur :	<input type="text" value="#444444"/>
Couleur définie pour la pratique, utilisée seulement pour le mobile.	
<input type="button" value="Enregistrer et ajouter un nouveau"/> <input type="button" value="Enregistrer et continuer les modifications"/> <input type="button" value="ENREGISTRER"/>	

8.2.2 Sites et parcours outdoor

- Cotations
- Filières
- Pratiques
- Types de parcours
- Types de site
- Échelles de cotation

8.2.3 Plongées

- Niveau de difficulté
- Niveau technique
- Pratique

8.2.4 Tourisme

- Autres sports : catégorie activités → Types de contenus touristiques
- Lieux de renseignements
- Types de lieux de renseignement
- Types d'événement touristiques
- Systèmes de réservation

TOURISME		
Catégories de contenu touristique	 Ajouter	 Modifier
Lieux de renseignement	 Ajouter	 Modifier
Systèmes de réservation	 Ajouter	 Modifier
Types d'événement touristique	 Ajouter	 Modifier
Types de lieu de renseignement	 Ajouter	 Modifier

Exemple : catégorie de contenu touristique et ses sous-type


Modification de Catégorie de contenu touristique

Pictogramme :	Actuellement: upload/touristiccontent-accommodation.svg Modifier: <input type="button" value="Parcourir..."/> Aucun fichier sélectionné.
Label [fr] :	Hébergements
Label [en] :	Accommodation
Geometry type :	Point
Nom de la première liste [fr] :	Type d'usage
Nom de la première liste [en] :	Type of use
Nom de la deuxième liste [fr] :	Label
Nom de la deuxième liste [en] :	Label
Ordre :	<input type="button" value="▲"/> <input type="button" value="▼"/> Ordre alphabétique si vide
Couleur :	#444444 <small>Couleur définie pour la catégorie, utilisée seulement pour le mobile.</small>

Pour chaque catégorie il est possible de définir deux listes de sous-type et leur nom.

Édition des sous-types de la catégorie “Hébergements”

Dans l'édition d'un contenu touristique de catégorie “Hébergement”

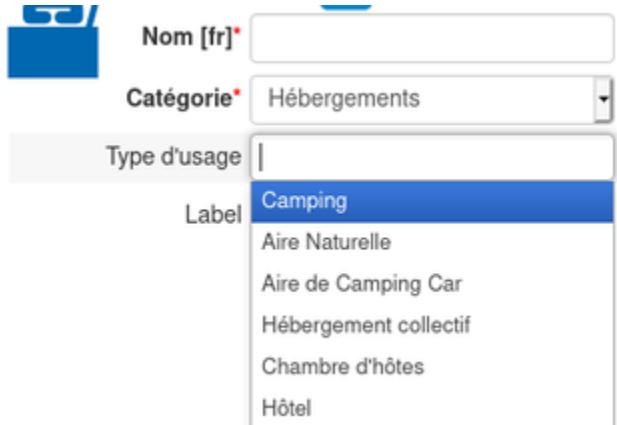

TYPES DANS LA PREMIÈRE LISTE		LABEL [FR]	LABEL [EN]	IN LIST	SUPPRIMER ?
PICTOGRAMME	Aire de Camping Car	Parcourir...	Aucun fichier sélectionné.	Aire de Camping Car	<input type="checkbox"/>
					Première <input type="checkbox"/>
Aire Naturelle		Parcourir...	Aucun fichier sélectionné.	Aire Naturelle	<input type="checkbox"/>
					Première <input type="checkbox"/>
Camping		Parcourir...	Aucun fichier sélectionné.	Camping	<input type="checkbox"/>
					Première <input type="checkbox"/>
Chambre d'hôtes		Parcourir...	Aucun fichier sélectionné.	Chambre d'hôtes	<input type="checkbox"/>
					Première <input type="checkbox"/>
Hébergement collectif		Parcourir...	Aucun fichier sélectionné.	Hébergement collectif	<input type="checkbox"/>
					Première <input type="checkbox"/>
Hôtel		Parcourir...	Aucun fichier sélectionné.	Hôtel	<input type="checkbox"/>
					Première <input type="checkbox"/>
+ Ajouter un objet Type1 supplémentaire					

Fig. 2: Sous-types de la catégorie “Hébergements”

8.2.5 Zones

- Communes
- Secteurs
- Zones sensibles et types de zones

8.3 Gestion des utilisateurs

Dans Geotrek, il est possible de créer et de paramétriser des profils d'utilisateurs, possédants chacun des droits spécifiques et rattachés à des structures. La gestion des utilisateurs et des groupes est basé sur le système d'authentification de Django. Pour cela les objets suivants dans l'interface d'administration doivent être utilisés :

AUTHENTICATION	
Structures	+ Ajouter Modifier
AUTHENTICATION ET AUTORISATION	
Groupes	+ Ajouter Modifier
Utilisateurs	+ Ajouter Modifier

8.3.1 Utilisateurs et droits

Une fois un utilisateur créé avec les informations minimales, il est possible de lui octroyer un certain nombre de permissions :

- **Actif** : permet de déterminer si l'utilisateur peut se connecter à Geotrek-Admin ou non.
- Il est préférable de désactiver un compte lorsqu'un utilisateur n'intervient plus sur Geotrek, plutôt que de le supprimer. En effet supprimer le compte supprimera également par exemple toutes les entrées dans l'historique de Geotrek associées à ce compte.
- **Statut équipe** : si la case est cochée l'utilisateur pourra accéder à l'interface d'administration de Geotrek-Admin
- **Statut super-utilisateur** : permet d'octroyer toutes les permissions à un utilisateur sans avoir à les définir explicitement

Il est possible pour un utilisateur, de lui donner des permissions spécifiques. Celles-ci sont déterminées par type d'objet.

Pour cela il faut sélectionner les permissions dans l'écran de gauche pour les positionner dans l'écran de droite. Par exemple sur la capture ci-dessous l'utilisateur possède les permissions pour consulter uniquement et exporter les informations relatives aux signalétiques sans possibilité d'accéder aux autres modules ou de modifier les contenus.

Permissions de l'utilisateur disponible(s) ⓘ

Filtrer

permissions de l'utilisateur disponible(s) ⓘ

Choix des « permissions de l'utilisateur » ⓘ

Tout choisir ⓘ

Tout enlever ⓘ

Permissions spécifiques à cet utilisateur. Maintenez appuyé « Ctrl », ou « Commande (touche pomme) » sur un Mac, pour en sélectionner plusieurs.

Available Permissions	Selected Permissions
mapentity log entry Can read log entries	land Gestionnaire signalétique Can view Signage management
admin entrée d'historique Can add log entry	signage Signalétique Can read Signage
admin entrée d'historique Can change_geom log entry	signage Signalétique Can view Signage
admin entrée d'historique Can change log entry	signage Type de signalétique Can view Signage Type
admin entrée d'historique Can delete log entry	signage Signalétique Can export Signage
admin entrée d'historique Can export log entry	
admin entrée d'historique Can read log entry	
admin entrée d'historique Can view log entry	
altimetry dem Can add dem	
altimetry dem Can change dem	
altimetry dem Can delete dem	

Cette gestion fine des droits permet de déterminer les différents accès aux modules pour chaque utilisateur. On retrouve généralement pour chaque type d'objet les permissions suivantes qu'il est possible de donner ou non à un utilisateur :

- Lecture - Ecriture - Modification - Modification de la géométrie de l'objet - Publication - Export

8.3.2 Groupes

Pour faciliter l'opération de création d'utilisateurs et d'affectation de permissions, il existe un système de groupes dans Geotrek. Pour chaque groupe il est possible d'associer un certain nombre de permissions.

Ensuite, dans la vue de modification de cet utilisateur, il suffira d'associer un utilisateur à un groupe pour bénéficier des permissions correspondantes.

Certains groupes existent par défaut dans Geotrek (Geotrek-rando, Lecteurs, Outdoor, Rédacteurs, Référents communication, Référents ronçons, Référents sentiers), mais il est bien entendu possible d'en ajouter d'autres pour refléter l'organisation de votre territoire.

8.3.3 Structures

Chaque utilisateur est obligatoirement rattaché à une structure. Lors de l'installation, Geotrek crée une structure à laquelle les premiers utilisateurs seront rattachés. Il est possible d'ajouter de nouvelles structures, reflétant des partenaires territoriaux, entreprises, entités qui seront ammenés à travailler à vos côté sur Geotrek.

Les utilisateurs d'une structure ne peuvent travailler que sur les objets dans Geotrek liés à leur structure. Ils pourront consulter les objets des autres structures mais n'auront pas le droit de les modifier.

Exemple

[Si on imagine un Geotrek déployé sur l'ensemble du territoire français, il serait alors envisageable d'avoir des structures correspondantes aux régions. Chaque utilisateur sera rattaché à sa région correspondante.] Il y aura alors la garantie qu'un utilisateur de Bretagne ne puisse pas modifier les objets saisis par un utilisateur de Normandie.

Cette notion de structures permet de segmenter les périmètres d'action des utilisateurs et de permettre à différentes entités de travailler sur un même Geotrek-Admin, tout en garantissant une cohérence des données.

Deux précisions : - Un utilisateur d'une structure pourra tout de même tracer des itinéraires sur des tronçons tracés par une autre structure - Pour qu'un utilisateur puisse modifier les objets d'une autre structure il y a deux possibilités : soit celui-ci est super-utilisateur, soit il devra posséder la permission “Can by structure” qui permet d'outrepasser la restriction des structures.

8.4 Configuration des portails

Geotrek permet de configurer un ou plusieurs portails. Ce terme est utilisé pour référencer un site grand public sur lequel seront visibles les objets publiés de Geotrek.

Ainsi, il est possible d'avoir plusieurs Geotrek-Rando branchés sur un seul Geotrek-Admin. Grâce à leur distinction sous forme de portail, il sera alors aisé de choisir sur quel Geotrek-Rando on souhaite faire apparaître une information.

Avec le widget Geotrek (<https://github.com/GeotrekCE/geotrek-rando-widget>) il est également possible d'utiliser cette fonctionnalité pour distinguer les contenus à afficher dans un widget ou dans un autre.

Pour configurer un ou plusieurs portails, il faut se rendre dans l'interface d'administration sur la section “Portails cibles”.

COMMUN		
Fichiers attachés		Modifier
Licences Pièce-jointes	Ajouter	Modifier
Organismes	Ajouter	Modifier
Portails cibles	Ajouter	Modifier
Sources des fiches	Ajouter	Modifier
Systèmes de réservation	Ajouter	Modifier
Thèmes	Ajouter	Modifier
Types de fichier	Ajouter	Modifier
Étiquettes	Ajouter	Modifier

Il est possible de choisir de publier sur un ou plusieurs portails les objets suivants : itinéraires, contenus et événements touristiques, pages statiques. Pour cela il suffit de sélectionner la valeur souhaitée dans le champ “portail” à l’édition de l’objet.

8.5 Pictogrammes

Les pictogrammes contribués dans Geotrek doivent être au format :

- SVG (de préférence, cela permet de conserver la qualité en cas de redimensionnement) ou PNG,
- SVG pour les thèmes (afin de permettre un changement de couleur pour les thèmes sélectionnés),

Il doivent :

- Avoir un viewport carré afin de ne pas être déformés sur le portail,
- Ne pas déborder du cercle inscrit pour les pratiques et les catégories de contenus touristiques, en prévoyant une marge si nécessaire.
- Avoir une dimension minimale de 56x56 pixels en ce qui concerne les PNG

Si vous utilisez Inkscape, vous devez définir une viewBox. Voir http://wiki.inkscape.org/wiki/index.php/Tricks_and_tips#Scaling_images_to_fit_in_webpages.2FHTML

Afin de s’intégrer au mieux dans le design standard, les couleurs suivantes sont recommandées :

- Blanc sur fond transparent pour les pratiques et les catégories de contenus touristiques,
- Gris sur fond transparent pour les thèmes,
- Blanc sur fond orange pour les types de POI.

EXTERNAL APIs

9.1 Geotrek et IGNrando'

Depuis la version 0.32.0, Geotrek-admin est capable de produire un flux des itinéraires et POIs présents dans sa BDD au format Cirkwi pour pouvoir les importer directement dans IGNrando'.

Exemple des randonnées et POIs du Parc national des Ecrins publiées sur IGNrando' depuis Geotrek-admin : <https://ignrando.fr/fr/communautes/parc-national-des-ecrins>

Depuis cette version, 2 flux sont automatiquement générés par Geotrek-admin au format attendu par l'IGN :

- [URL_GEO TREK-ADMIN]/api/cirkwi/circuits.xml
- [URL_GEO TREK-ADMIN]/api/cirkwi/pois.xml

Il est possible d'exclure les POI du flux pour ne diffuser que les randonnées. Pour cela, ajouter le paramètre ?withoutpois=1 à la fin de l'URL (<http://XXXXXX/api/cirkwi/circuits.xml?withoutpois=1>).

Il est possible de filtrer les POI du flux par structure. Pour cela, ajouter le paramètre ?structures=<identifiant_de_la_structure> à la fin de l'URL (<http://XXXXXX/api/cirkwi/pois.xml?structures=2>). Vous pouvez filtrer avec plusieurs structures : en séparant les identifiants par des virgules (<http://XXXXXX/api/cirkwi/pois.xml?structures=2,5,3>).

Il est également possible de filtrer les randonnées du flux par structure et par portail. Pour cela, ajouter le paramètre ?structures=<identifiant_de_la_structure>. ou ?portals=<identifiant_de_la_structure> à la fin de l'URL (<http://XXXXXX/api/cirkwi/circuits.xml?portals=3&structures=1>). Tout comme les pois Vous pouvez filtrer avec plusieurs structures et portails : en séparant les identifiants par des virgules.

Il est possible de filtrer les randonnées par portail et structure en même temps en séparant les 2 filtres par un & (<http://XXXXXX/api/cirkwi/circuits.xml?portals=3&structures=1>).

Le référentiel CIRKWI a été intégré dans 3 tables accessibles dans l'Adminsite (à ne pas modifier) :

CIRKWI		
Catégories de POI Cirkwi	+ Ajouter	Modifier
Locomotions Cirkwi	+ Ajouter	Modifier
Tags Cirkwi	+ Ajouter	Modifier

Si vous ne souhaitez pas utiliser les valeurs par défaut ou avez créez vos propres typologies, il faut que vous renseigniez les correspondances entre les catégories de votre Geotrek et celles du référentiel IGN (Cirkwi) dans votre Adminsite. Comme indiqué ici : <https://github.com/GeotrekCE/Geotrek-admin/issues/806>.

- Pratique >> locomotion/loisirs

- Accessibilite >> thematiques/tags
- Themes >> thematiques/tags
- Types de POI >> Categories POI


Les correspondances avec les valeurs de ces 3 tables sont donc à renseigner dans les tables Geotrek des Pratiques, Accessibilités, Thèmes et Types de POI.

Ce même flux est aussi utilisable pour alimenter directement la plateforme Cirkwi : <https://pro.cirkwi.com/importez-vos-donnees-geotrek-dans-cirkwi/>.

Note

Geotrek-admin dispose aussi d'une API générique permettant d'accéder aux contenus d'une instance à l'adresse : [URL_GEOTREK-ADMIN]/api/v2/

VISUALISER LES DONNÉES DANS QGIS

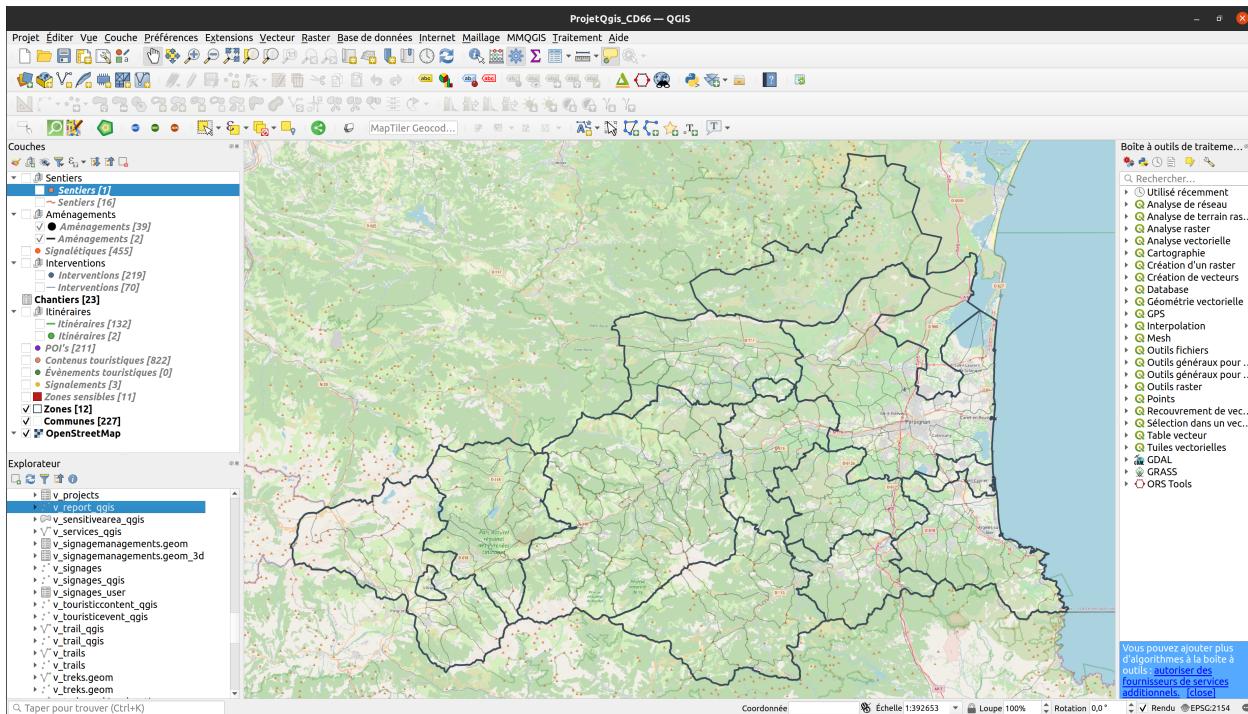

10.1 Crédation de vues SQL pour afficher des couches dans QGIS


Des vues SQL ont été créées dans la base de données PostgreSQL de Geotrek-admin dans le but de les afficher dans QGIS ou autre. Ces vues contiennent les informations essentielles que l'on retrouve dans Geotrek-admin au niveau de chaque module.

Ces vues sont consultables en lecture seule dans QGIS sous forme de couche SIG.

Les modifications se font directement dans Geotrek-admin pour chaque projet, et elles sont répercutées instantanément dans les vues SQL.

10.2 Créer une connexion à la base de données PostgreSQL du projet

1. Ouvrir le logiciel QGIS
2. Créer une nouvelle connexion de base de données PostgreSQL
 - Dans l'Explorateur > PostgreSQL > Nouvelle connexion
 - Renseigner les informations suivantes : * Nom de la connexion * Hôte * Port * Base de données * SSL mode : permet * Nom d'utilisateur * Mot de passe
 - Cliquer sur « Tester la connexion »
 - Si la connexion est réussie, cliquer sur OK pour enregistrer la connexion

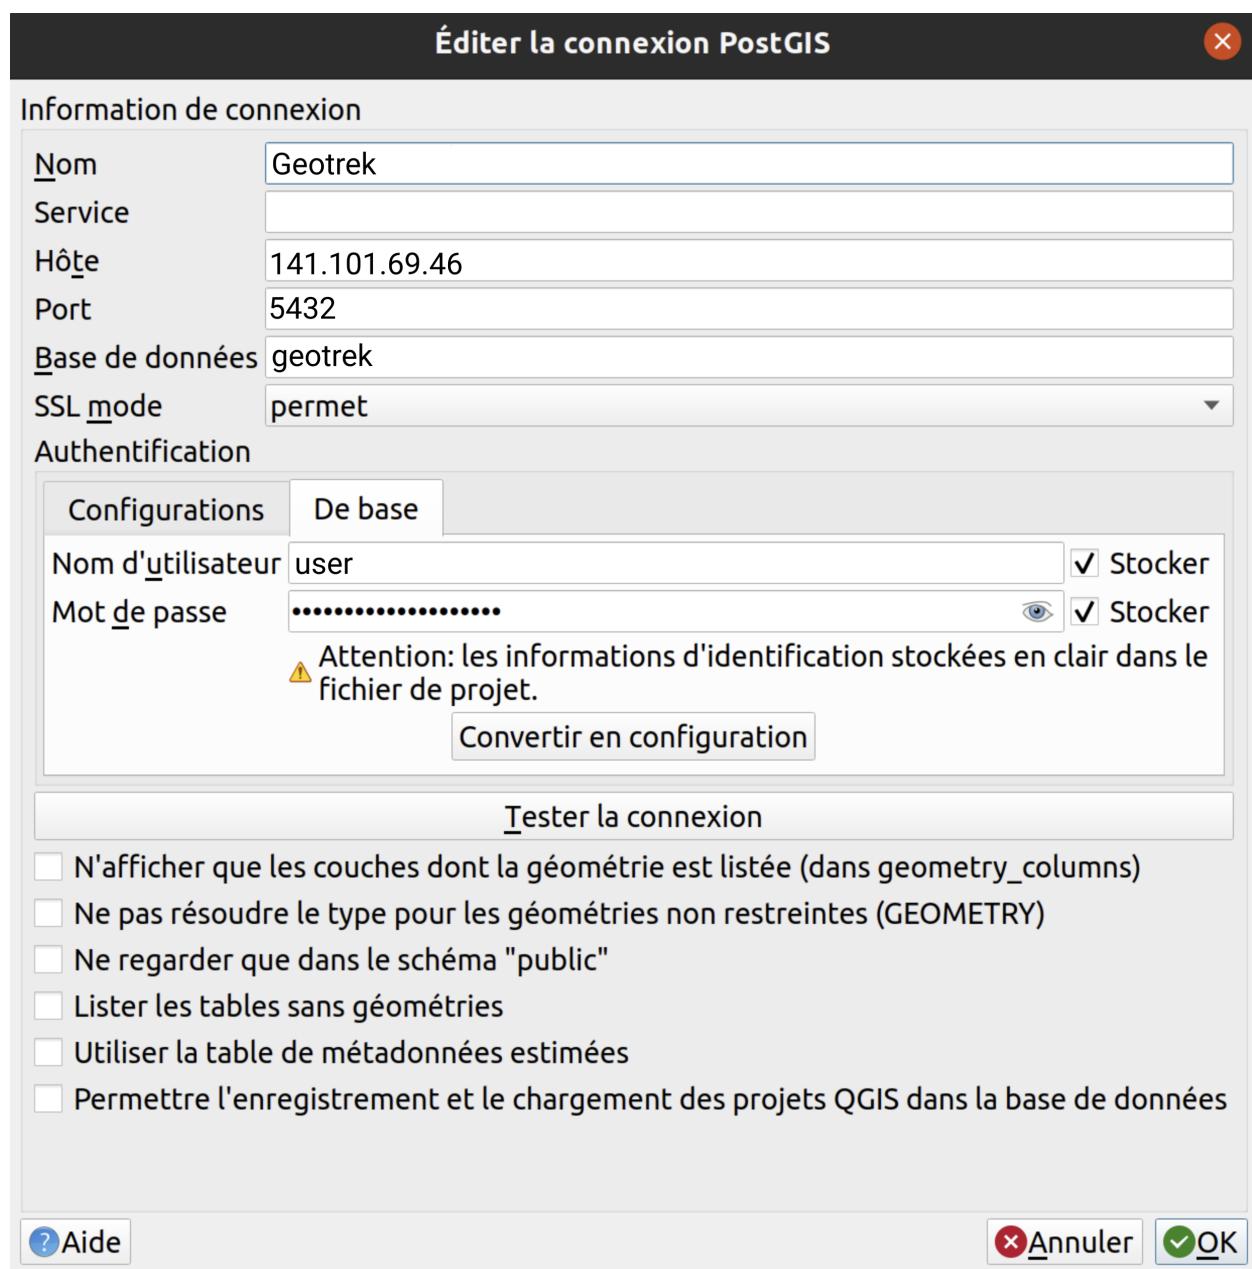

10.3 Créer un projet QGIS à partir des vues SQL

10.3.1 Afficher une vue SQL sous forme de couche

- Dans l'Explorateur > PostgreSQL > Ouvrir la connexion précédemment créé > Schéma public
- Ajouter les vues : Clic droit sur l'objet > Ajouter la couche au projet
- Correspondance couches <> vues
 - Sentiers <> *v_trails*
 - Aménagements <> *v_infrastructures*
 - Signalétiques <> *v_signages*
 - Interventions <> *v_interventions*
 - Chantiers <> *v_projects*
 - Itinéraires <> *v_treks*
 - POI's <> *v_pois*
 - Contenus touristiques <> *v_touristiccontents*
 - Évènements touristiques <> *v_touristicevents*
 - Signalement <> *v_reports*
 - Zones sensibles <> *v_sensitivearea_qgis*
 - Zones <> *v_districts*
 - Communes <> *v_cities*
- Couches supplémentaires (dépend des projets) * Sites outdoor <> *v_outdoor_sites* * Parcours outdoor <> *v_outdoor_courses*


10.3.2 Afficher un fond de plan OpenStreetMap

- Dans l'Explorateur > XYZ Tiles > OpenStreetMap

10.3.3 Créeer des groupes de couches

- Dans le panneau des couches > clic droit > Ajouter un groupe

Il peut être utile de créer des groupes de couches dans le cas où certaines couches sont disponibles dans plusieurs types géométriques : exemple pour la couche Sentiers qui peut contenir des lignes et des points

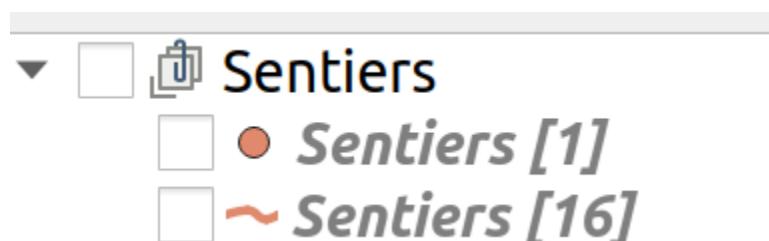

10.3.4 Changer le style d'une couche

- Clic droit sur la couche > Propriétés > Symbologie

Selon le type géométrique de la couche (point, ligne, polygone), il est possible de changer à volonté la couleur de remplissage, la couleur de contour, la taille ou l'épaisseur.

10.3.5 Dimensionner les colonnes de la table attributaire

Le fait de dimensionner la taille des colonnes dans la table attributaire permet une lisibilité des noms de champs et des informations contenues à l'intérieur :

- Clic droit sur la couche > Ouvrir la Table d'Attributs > clic droit sur une colonne > Taille autom pour toutes les colonnes

Certains champs texte peuvent être très larges (exemple `_Description_` dans la couche **Zones sensibles**). Dans ce cas il est possible d'adapter manuellement la taille de la colonne : * Clic droit sur la couche > Ouvrir la Table d'Attributs > clic droit sur la colonne > Largeur > Entrer une largeur de colonne (exemple : 200)

10.3.6 Afficher le décompte des entités d'une couche

- Clic droit sur la couche > Afficher le nombre d'entités

10.3.7 Zoomer sur l'emprise d'une couche

- Clic droit sur la couche > Zoomer sur la(les) couche(s)

FREQUENTLY ASKED QUESTIONS

11.1 How are 3D informations obtained ?

All paths geometries are “*draped*” on a Digital Elevation Model, when created or updated.

All linear objects that defined using topologies (*treks*, ...) take their 3D informations from their related paths, instead of reading the DEM.

11.2 How is the ascent computed on treks ?

We compute the cumulative elevation gain.

We sample the DEM every 25m by default (see ALTIMETRIC_PROFILE_PRECISION setting), and we add some smoothing to avoid noise.

For more details :

- The smoothing explanation
- The piece of code to compute positive and negative accumulations
- Draping lines with PostGIS (or french version)

11.3 How are POIs related to treks ?

POIs are considered as an *editorial* information, and are created carefully along treks.

When a POI is created, it is attached to the closest path.

A trek is defined by a serie of paths, and some POIs are associated to them.

Note: There is currently no way to manually control the association between treks and POIs.

This was discussed among the first *Geotrek* users, come and argue on the mailing list !

If TREKKING_TOPOLOGY_ENABLED is set to False, there are no paths involved. POIs are thus related to treks using a basic spatial intersection, with a distance set in setting TREK_POI_INTERSECTION_MARGIN (default to 500 meters).

11.4 Can I have overlapping districts ?

Districts are a generic notion to qualify your territory. They can be valleys, mounts, ...

You can imagine using the districts table for all those different notions, resulting in overlapping geometries. Geotrek-admin will associate them all to your objects.

11.5 Why does Makina Corpus sell Geotrek, released under an Open-Source license ?

In the early years of the Free Software movement, it was quite common to pay in order to receive a physical copy (on floppy disks) of some GNU programs and source code.

In the late nineties, the IT industry was not comfortable with the confusion introduced by the word *Free* in English (“free” as freedom, or “free” as costless), and therefore started to spread the word *Open Source* instead.

Today, those copies of Open Source software can be obtained on the Internet for free of course. But yet, the GNU Software Fundation [still recommends to claim a financial contribution](#) when distributing them, in order to support the development and maintenance. And note that nowadays, many of the most important Open Source applications have their own foundation, focused on collecting funds for development and maintenance.

The *Geotrek fundation* does not exist yet, but the community is growing. Makina Corpus is currently maintaining this Open Source application, which implies the following responsibilities :

- Maintain a public website, with a fully working demo ;
- Write documentation ;
- Provide community support on the mailing-list ;
- Promote the application at conferences, social networks and communities ;
- Triage and investigate issues tickets on Github ;
- Fix bugs and regressions if any ;
- Contribute, propose and argue code merge on external libraries ;
- Keep software dependencies up-to-date, without regressions ;
- Make sure the application remains easy to install on latest Linux distributions ;
- Add some engineering to allow customization and pluggability when new specific features are planned ;

Each of these tasks are often considered implicit, but they consume energy and time, which represents a substantial cost for a company like ours.

To conclude, we don't really sell *Geotrek*, since you can get it on Github and install it easily, but we ask for a financial contribution regarding the above responsibilities. It is not only legal, but also recommended by the funders of the Free and Open Source Software movement.

11.6 How can I help and contribute ?

There are many ways to contribute to a Free Software. And modifying the source code is probably the least common action. For example :

- Help the users and answers questions on the [mailing-list](#) ;
- Download it, try it ;
- [Open a ticket](#) when you encounter a bug ;
- [Open a ticket](#) when you have a suggestion or feature idea ;
- Share your feedback, spread the word inside your organization ;
- Write and talk about *Geotrek*, at conferences, workgroups, forums ;
- Translate the documentation ;
- Translate the menus, buttons and labels (we use [Weblate](#)) ;
- Maintain the installation script for different Linux distributions (*requires some basic Linux skills*) ;
- Fix bugs or improve layout and apparence (*requires Webmaster skills*) ;
- Fix bugs or improve core modules (*requires python/Django skills*).

Join us on the [mailing list](#)! Send an email to geotrek-fr+subscribe@googlegroups.com and you will receive an invitation automatically :)

INSTALLATION

Use these instructions to install Geotrek-admin in an easy way on a dedicated Ubuntu Focal Fossa 20.04 LTS server for production. For another distributions, please use [the Docker installation method](#). It requires more technical skills. Lastly, for a developer instance, please follow [the dedicated procedure](#).

12.1 Requirements

A first estimation of minimal required system resources are:

- 2 cores
- 4 Go RAM
- 20 Go disk space

For big instances required system resources are:

- 4 cores
- 8 Go RAM or more
- 50 Go disk space or more (20 Go + estimated size of attached files like photos, including elements imported from SIT)

Software requirements are :

- Ubuntu Focal Fossa 20.04 LTS. Server flavor is recommended but any other flavors work too (desktop...)

An Internet connection with open HTTP and HTTPS destination ports is required.

12.2 Information to prepare before installation

These information will be asked during the installation process and are the basic configuration of Geotrek-admin:

- The **domain name** or **IP** to use to access to **Geotrek-admin** web application.
- Rando server name: the **domain name** to use to access to **Geotrek-rando** website (optional, if appropriate).
- PostgreSQL **host**, **port**, **user**, **password** and **DB name** if you use an external DB server.
- The **SRID** of the projection to use to store geometries. The projection must match your geographic area and coordinates must be in meters.
- The list of **languages** into which translation of contents will be made
- The name or acronym of your **organization**

12.3 Fresh installation

Run the following command in a shell prompt on your server:

```
curl https://raw.githubusercontent.com/GeotrekCE/Geotrek-admin/master/tools/install.sh |  
  bash
```

If you don't want to use a local database, you can run the following command instead. This will prevent the script to install PostgreSQL server locally. Don't forget to enable PostGIS extension in your remote database before installation.

```
curl https://raw.githubusercontent.com/GeotrekCE/Geotrek-admin/blob/master/tools/install.  
sh | bash -s --nodb
```

Then create the application administrator account and connect to the web interface.

```
sudo geotrek createsuperuser
```

If you are not confident with the `install.sh` script, or if you are having troubles, you can do the same operations by hand:

1. Add deb `https://packages.geotrek.fr/ubuntu bionic main` to APT sources list.
2. Add `https://packages.geotrek.fr/geotrek.gpg.key` to apt keyring.
3. Run `apt-get update`
4. If you want to use a local database, install PostGIS package (before installing Geotrek-admin, not at the same time). If not, you must create database and enable PostGIS extension before.
5. Install the Geotrek-admin package (`sudo apt install geotrek-admin`).

Note: Geotrek-admin is automatically installed in `/opt/geotrek-admin/` directory.

The installation automatically creates an internal `geotrek` linux user, owner of this directory

The Geotrek-admin Python application is located in `/opt/geotrek-admin/lib/python3.6/site-packages/geotrek` directory

12.4 Extra steps

We highly recommend installing an antivirus software to regularly scan uploaded files located under `/opt/geotrek-admin/var/media/`.

Here is the installation process for ClamAV :

```
apt install clamav
```

Prepare quarantine folder for suspicious files :

```
mkdir /var/lib/clamav/quarantine/  
chmod 700 /var/lib/clamav/quarantine/
```

Configure ClamAV via cron, to scan the folder once a day, put suspicious files in quarantine, and raise email alerts, by creating file `/etc/cron.daily/clamscan` with the following content :

```
#!/bin/sh

nice -n 15 ionice -c 3 clamscan --recursive --allmatch --suppress-ok-results --no-
summary --infected --scan-mail=no --log=/var/log/clamav/scan-report.$(date -Iseconds) /
opt/geotrek-admin/var/media/ |mail -E -s "ClamAV report for $(hostname)" admin@example.
com

# Cleanup old files in quarantine (> 90 days)
find /var/lib/clamav/quarantine/ -type f -mtime +90 -delete

# Cleanup old scan reports (> 365 days)
find /var/log/clamav/ -type f -name "scan-report.*" -mtime +365 -delete
```

Make sure to change alert recipient (admin@example.com above) and make this cron file executable :

```
chmod 700 /etc/cron.daily/clamscan
```

If a suspicious file is put in quarantine, you will need to manually delete the corresponding attachment from Geotrek-Admin (since the file for this attachment has moved to the quarantine folder, it will no longer be found).

12.5 Upgrade

12.5.1 From Geotrek-admin >= 2.33

Beforehand you shoud update your system's catalog:

```
sudo apt-get update
```

If your current version is <= 2.40.1 you should run instead:

```
sudo apt-get update --allow-releaseinfo-change
```

To display the installed version and the latest upgradeable version, run:

```
apt list --all-versions geotrek-admin
```

To upgrade only geotrek-admin and its dependencies, run:

```
sudo apt-get install geotrek-admin
```

To upgrade geotrek-admin to a **specific version**, run:

```
sudo apt-get install geotrek-admin=<version>
```

For instance:

```
sudo apt-get install geotrek-admin=2.97.4.ubuntu18.04
```

or

```
sudo apt-get install geotrek-admin=2.98.0.ubuntu20.04
```

Note: all package versions remain available. Even when not listed with `apt list`.

Once geotrek-admin has been upgraded you may want to prevent unwanted upgrade with the whole distribution, you can run:

```
sudo apt-mark hold geotrek-admin
```

12.5.2 From Geotrek-admin <= 2.32

First of all, make sure your current Geotrek-admin version works correctly. Especially, after an upgrade of the Ubuntu distribution, you will have to run `./install.sh` before proceeding with Geotrek-admin upgrade.

Then, go inside your existing Geotrek-admin installation directory and run the dedicated migration script:

```
curl https://raw.githubusercontent.com/GeotrekCE/Geotrek-admin/blob/master/tools/migrate.  
sh | bash
```

Check if `SPATIAL_EXTENT` is well set in `/opt/geotrek-admin/var/conf/custom.py` (see Advanced configuration section)

Note: Geotrek-admin is now automatically installed in `/opt/geotrek-admin/` directory and the advanced configuration file moved to `/opt/geotrek-admin/var/conf/custom.py` (with spatial extent, map and modules configuration...).

See advanced configuration documentation for details.

The `etc/settings.ini` file is replaced by basic configuration, updated with `sudo dpkg-reconfigure geotrek-admin` command (database, SRID, languages, server_name, timeout...).

Update your imports, synchronization and backup commands and directories.

12.5.3 From Geotrek-admin <= 2.69.0

WARNING!

Starting from version 2.70.0, Geotrek now needs PostgreSQL extension ‘pgcrypto’.

Make sure to run the following command **BEFORE** upgrading:

```
su postgres -c "psql -q -d $POSTGRES_DB -c 'CREATE EXTENSION pgcrypto;'"
```

12.6 Server migration

It is a new installation with an additional backup/restore and a file transfert in between. The commands below are examples to adapt to your actual configuration (server names, database configuration). These commands apply to versions >= 2.33. If your version is below 2.33, please check the doc of your version.

Backup settings, media files and database on the old server:

```
sudo -u postgres pg_dump -Fc geotrekdb > geotrekdb.backup  
tar cvzf data.tgz geotrekdb.backup /opt/geotrek-admin/var/conf/ /opt/geotrek-admin/var/  
media/
```

Restore files on the new server:

```
scp old_server_ip:path/to/data.tgz .
tar xvzf data.tgz
```

12.7 Ubuntu bionic PostGIS 2.5 upgrade

Geotrek-admin requires at least PostGIS 2.5.

If you installed Geotrek-admin on bionic ubuntu with provided install method, you should update your database :

```
# Firstly, backup your database (see previous section)
# install postgresql APT repository
# (from https://wiki.postgresql.org/wiki/Apt)

sudo apt install curl ca-certificates gnupg
curl https://www.postgresql.org/media/keys/ACCC4CF8.asc | gpg --dearmor | sudo tee /etc/
apt/trusted.gpg.d/apt.postgresql.org.gpg >/dev/null
sudo sh -c 'echo "deb http://apt.postgresql.org/pub/repos/apt $(lsb_release -cs)-pgdg_
main" > /etc/apt/sources.list.d/pgdg.list'
sudo apt update

# install postgis 2.5 on postgresql 10
sudo apt install postgresql-10-postgis-2.5-scripts
sudo -u postgres psql -d geotrekdb -c "ALTER EXTENSION POSTGIS UPDATE"; # replace_
geotrekdb by your database name

# You database is now using postgis 2.5 !

# Troubleshooting
# If you encounter error with last command to update postgis, just drop view v_projects_
and retry
# This view will be recreated after next Geotrek-admin upgrade or dpkg-reconfigure.
sudo -u postgres psql -d geotrekdb -c "DROP VIEW v_projects;";
sudo -u postgres psql -d geotrekdb -c "ALTER EXTENSION POSTGIS UPDATE";

# Warning, by using postgresql official apt repo, next apt upgrade or apt full-upgrade_
will install postgresql-9.6 and postgis 3 along your database, because postgis meta-
package has changed
# If your are not using postgresql-9.6, you can remove it (bionic postgresql default_
version is 10)
# sudo apt remove postgresql-9.6
```

If you use an external database, you should adapt this method along your system

12.8 Uninstallation

Run:

```
apt-get remove geotrek-admin
```

Media files will be left in /opt/geotrek-admin/var directory. To remove them, run:

```
apt-get purge geotrek-admin
```

To remove dependencies (convertit, screamshooter...), run:

```
apt-get autoremove
```

Note: PostgreSQL and its database will not be removed by these commands. If need be, remove them manually.

CHAPTER
THIRTEEN

TROUBLESHOOTING

Geotrek-admin logs are stored in `/opt/geotrek-admin/var/log/geotrek.log` file.

But if Geotrek-admin does not start, take a look to systemd logs for each of the 3 Geotrek-admin services (user web interface, API and asynchronous tasks):

```
sudo journalctl -eu geotrek-ui
sudo journalctl -eu geotrek-api
sudo journalctl -eu geotrek-celery
```

The output is paginated. With `-e` option you are at the end of the logs but you can go up and down with arrows. Type `Q` to quit. If you want to copy the log to a file, do:

```
sudo journalctl -u geotrek-ui > systemd-geotrek-ui.log
```

13.1 Frequent problems encountered

13.1.1 Error 500 with *django.db.utils.IntegrityError ... NOT NULL for column “language”*

django.db.utils.IntegrityError: ERREUR: une valeur NULL viole la contrainte NOT NULL de la colonne « language »

This means specific migrations for translated fields have not been executed on database during update. You have to run them manually, classical migrations included:

```
geotrek migrate
geotrek sync_translation_fields
geotrek update_translation_fields
geotrek update_geotrek_permissions
geotrek update_post_migration_languages
```

13.2 Signature check for debian packages

When you try to upgrade your Geotrek-admin, you can have problems with signature check :

```
An error occurred while checking the signature.  
The repository is not updated and previous index files will be used.  
GPG error: https://packages.geotrek.fr/ubuntu bionic InRelease: The following signatures are invalid
```

You have to update the signature key to get the last update :

```
wget -O- "https://packages.geotrek.fr/geotrek.gpg.key" | sudo apt-key add -
```

LOADING DATA

14.1 Prerequisites for your data

14.1.1 Layers

- WMTS protocol
- WebMercator Projection

14.1.2 Core

- Only LineString geometries
- Simple geometries
- Not overlapping

If possible:

- Connex graph
- Name column
- Data source

Formats: Shapefile or pure SQL dump (CREATE TABLE + INSERT)

14.1.3 Land

- Cities polygons (Shapefile or SQL, simple and valid Multi-Polygons)
- Districts (Shapefile ou SQL, simple and valid Multi-Polygons)
- Restricted Areas (Shapefile ou SQL, simple and valid Multi-Polygons)

14.1.4 Extras

- Languages list
- Structures list (and default one)

14.2 Load MNT raster

In [QGIS](#), you can visualize your DEM, or merge several tiles together (in *Raster > Misc > Merge*).

Generate a GeoTIFF, and upload both files (.tif + .tfw) on the server. And use the Geotrek-admin command to load it into PostGIS :

```
sudo geotrek loaddem <PATH>/dem.tif
```

Note: This command makes use of *GDAL* and *raster2pgsql* internally. It therefore supports all GDAL raster input formats. You can list these formats with the command `raster2pgsql -G`.

Note: If you only have a .tif file, you can generate the .tfw file with the command `gdal_translate -co "TFW=YES" in.tif out.tif`. It will generate a new .tif file with its .tfw metadata file.

Note: If you want to update the altimetry of the topologies you need to use the option : `--update-altimetry`

CONFIGURATION

15.1 Basic configuration update

To update basic configuration (server name, database connection, languages, or set workers number or timeout), run:

```
sudo dpkg-reconfigure geotrek-admin
```

The basic configuration is stored in `/opt/geotrek-admin/var/conf/env` file, not to be changed manually. This file also contains the PostgreSQL authentication details, if you need to access your Geotrek-admin database.

15.2 NGINX configuration

NGINX configuration is controlled by Geotrek-admin and will be erased at each upgrade. Do not modify `/etc/nginx/sites-available/geotrek.conf` or `/etc/nginx/sites-enable/geotrek.conf`. Modify `/opt/geotrek-admin/var/conf/nginx.conf.in` instead. To update `nginx.conf`, then run:

```
sudo dpkg-reconfigure geotrek-admin
```

15.3 Activate SSL / HTTPS

To activate https, you need firstly to change `custom.py` and add :

```
SESSION_COOKIE_SECURE = True
CSRF_COOKIE_SECURE = True
```

After this, edit `nginx.conf.in` to add your certificate.

If you generate it with letsencrypt : You can use certbot to add the certificate in your configuration. But you will have to move the configuration automatically added into `nginx.conf`, to the file `nginx.conf.in` in `/opt/geotrek-admin/var/conf/` directory

You have to move the configuration to the file `nginx.conf.in` because `nginx.conf` is automatically changed during command `dpkg-reconfigure geotrek-admin`.

15.4 Users management

Geotrek-admin relies on Django authentication and permissions system. Users belong to groups. Permissions can be assigned at user or group-level.

The whole configuration of users, groups and permissions is available in the *AdminSite*, if you did not enable *External authent* (see below).

By default six groups are created:

- Readers (“Lecteurs”)
- Path managers (“Référents sentiers”)
- Trek managers (“Référents communication”)
- Editors (“Rédacteurs”)
- Geotrek-rando (“Geotrek-rando”)
- Trek and management editors (“Rédacteurs rando et gestion”)

Once the application is installed, it is possible to modify the default permissions of these existing groups, create new ones etc...

If you want to allow the users to access the *AdminSite*, give them the *staff* status using the dedicated checkbox. The *AdminSite* allows users to edit data categories such as *trek difficulty levels*, *POI types*, etc.

Permissions fall into four main types of actions: * add * change * delete * visualization

Each data type is at least associated with the four basic actions (*add, change, delete, read*). One data type corresponds to a database table (*signage_signage, trekking_trek...*)

Here is the signification of actions allowed through permissions: * *view*: see the data in Django *AdminSite* (for data of “category” type such as POI types, or difficulty level) * *read*: see the data in Geotrek-admin interface (button and data list) * *add*: adding of a new data (trek, theme...) * *change*: modify the data * *change_geom*: modify the data geometry * *publish*: publish the data * *export*: export the data through Geotrek-admin interface (CSV, JSON...)

15.5 Database users

It is not safe to use the `geotrek` user in QGIS, or to give its password to many collaborators.

A wise approach, is to create a *read-only* user, or with specific permissions.

With `pgAdmin`, you can create database users like this:

```
CREATE ROLE lecteur LOGIN;
ALTER USER lecteur PASSWORD 'passfacile';
GRANT CONNECT ON DATABASE geotrekdb TO lecteur;
```

And give them permissions by schema :

```
GRANT USAGE ON SCHEMA public TO lecteur;
GRANT USAGE ON SCHEMA geotrek TO lecteur;
GRANT SELECT ON ALL TABLES IN SCHEMA public TO lecteur;
GRANT SELECT ON ALL TABLES IN SCHEMA geotrek TO lecteur;
```

You can also create groups, etc. See PostgreSQL documentation.

15.6 Advanced Configuration

See *advanced configuration...*

ADVANCED CONFIGURATION

16.1 Custom setting file

Geotrek-admin advanced configuration is done in `/opt/geotrek-admin/var/conf/custom.py` file. The list of all overridable setting and default values can be found [there](#).

After any change in `custom.py`, run:

```
sudo service geotrek restart
```

Sometimes you also have to run:

```
sudo dpkg-reconfigure -u geotrek-admin
```

Note: Don't override the `os.getenv()` settings as they are managed with Basic configuration.

16.2 Spatial extents

In order to check your configuration of spatial extents, a small tool is available at <http://server/tools/extents/>.

Note: Administrator privileges are required.

16.3 Email settings

Geotrek-admin will send emails:

- to administrators when internal errors occur
- to managers when a feedback report is created

Email configuration takes place in `/opt/geotrek-admin/var/conf/custom.py`, where you control recipients emails (ADMINS, MANAGERS) and email server configuration.

Set configuration settings in `geotrek/settings/custom.py.dist` template file.

You can test your configuration with the following command. A fake email will be sent to the managers:

```
sudo geotrek sendtestemail --managers
```

16.4 Disable modules and components

In order to disable a full set of modules, in the custom settings file, add the following code:

```
# Disable infrastructure and maintenance
INSTALLED_APPS = list(INSTALLED_APPS)
INSTALLED_APPS.remove('geotrek.infrastructure')
INSTALLED_APPS.remove('geotrek.maintenance')
INSTALLED_APPS = INSTALLED_APPS
```

In order to remove notion of trails:

```
TRAIL_MODEL_ENABLED = False
```

In order to remove zoning combo-boxes on list map:

```
LAND_BBOX_CITIES_ENABLED = True
LAND_BBOX_DISTRICTS_ENABLED = True
LAND_BBOX.Areas_ENABLED = False
```

Note: By doing so, some software upgrades may not be as smooth as usual. Never forget to mention this customization if you ask for community support.

16.5 Feedback reports settings

16.5.1 Send acknowledge email

```
SEND_REPORT_ACK = True
```

If false, no email will be sent to the sender of any feedback on Geotrek-rando website

16.5.2 Suricate support

Geotrek reports can work together with Suricate API, using one of 3 modes. Proceed through a mode full configuration before proceeding to the next mode.

1 - No Suricate (default)

This mode sends no report data to Suricate.

To initialize Report forms (Geotrek-admin, Geotrek-rando-v2, Geotrek-rando-v3) load lists for categories, activities, statuses and problem magnitude:

```
geotrek loaddata /opt/geotrek-admin/lib/python*/site-packages/geotrek/feedback/fixtures/
↪basic.json
```

To make these lists available for your Geotrek-rando-v2, run `sync_rando` (see [synchronization](#))

2 - Suricate Standard

This mode simply forwards all reports to Suricate, using the Standard API to post reports.

Set your account settings in `custom.py`:

```
SURICATE_REPORT_ENABLED = True

SURICATE_REPORT_SETTINGS = {
    'URL': '<Suricate Standard API Url>',
    'ID_ORIGIN': '<Suricate origin ID>',
    'PRIVATE_KEY_CLIENT_SERVER': '<your private key client / server>',
    'PRIVATE_KEY_SERVER_CLIENT': '<your private key server / client>',
}
```

3 - Suricate Management (Workflow)

This mode allows to retrieve reports and related data directly from Suricate, using the Management API to get data. It is used to process and manage reports, using the Intervention module and following a predefined workflow, while sending all progress to Suricate. It implies enabling Suricate Report mode as well. You can find a detailed explanation on the workflow here : <https://github.com/GeotrekCE/Geotrek-admin/issues/2366#issuecomment-1113435035>

- Set your settings in `custom.py` :

```
SURICATE_WORKFLOW_ENABLED = True

SURICATE_MANAGEMENT_SETTINGS = {
    'URL': '<Suricate Management API Url>',
    'ID_ORIGIN': '<Suricate origin ID>',
    'PRIVATE_KEY_CLIENT_SERVER': '<your private key client / server>',
    'PRIVATE_KEY_SERVER_CLIENT': '<your private key server / client>',
}

SURICATE_WORKFLOW_SETTINGS = {
    "SURICATE_RELOCATED_REPORT_MESSAGE": "This report is not located in Workflow\u2013responsibility area.",
    "SKIP_MANAGER_MODERATION": False
}
```

You can use the following command to test your connection settings:

```
geotrek sync_suricate -v 2 --connection-test
```

Load lists for activities and/or report statuses from Suricate:

```
geotrek sync_suricate --activities --statuses -v 2
```

Load alerts from Suricate (located in your bounding box) :

```
geotrek sync_suricate -v 2 --no-notification
```

To make these lists available for your Geotrek-rando, run `sync_rando` (see [synchronization](#))

- Then load extra required statuses for Reports and Interventions:

```
geotrek loaddata /opt/geotrek-admin/lib/python*/site-packages/geotrek/feedback/fixtures/
↳management_workflow.json
geotrek loaddata /opt/geotrek-admin/lib/python*/site-packages/geotrek/maintenance/
↳fixtures/basic.json
```

- **Go to the Admin Site and**

- if you want to include the moderation steps (*SKIP_MANAGER_MODERATION = False*), select a user as Workflow Manager (*/admin/feedback/workflowmanager/*). Their role is to assign reports to other users.
- select a district as Workflow District (*/admin/feedback/workflowdistrict/*). This zone defines the area of responsibility for reports. Reports relocated outside of the district will be excluded from workflow.
- create predefined emails (*/admin/feedback/predefinedemail/*) to notify Suricate Sentinels and Administrators. You can use `##intervention_date##` and `##supervisor##` in the messages' body to automatically replace with the report's linked Intervention date and author. The Extended Username field will be displayed (see User Profile under */admin/auth/user/*).
- make sure Users involved in the workflow have proper permissions to create and update Reports and Interventions (*/admin/auth/user/*)

Be aware that, when enabling Suricate Management mode, Suricate becomes the master database for reports. This means **reports created in Geotrek-admin will not be saved to the database, they will only be sent to Suricate**. Reports are only saved when synchronized back from Suricate, when the synchronization command is run. Make sure to run these 3 commands daily to maintain synchronization and update reports (thanks to *cron* for instance) :

```
geotrek retry_failed_requests_and_mails
geotrek check_timers
geotrek sync_suricate
```

16.5.3 Display reports with status defined colors

```
ENABLE_REPORT_COLORS_PER_STATUS = True
```

Go to the Admin Site and select colors to display for each status (*/admin/feedback/reportstatus/*).

16.5.4 Use timers to receive alerts for your reports

It is possible to enable receiving email alerts for reports that have remained in the same status for too long. For instance, I can create two report statuses “To program” with timer days set to 10 and “Programmed” with timer days set to 0. If a report has had status “To program” for 10 days, an email alert will be sent. If its status is changed to “Programmed” within these 10 days, this will cancel the alert. The email alert will be sent to the assigned user for this report, or to managers (setting *MANAGERS*) if there is no assigned user.

To enable the alerts :

- Go to the Admin Site and set “Timer days” to some integer other than 0 in relevant statuses (*/admin/feedback/reportstatus/*)
- Select the “Uses timers” checkbox on reports that you wish to receive alerts for (in report update form)
- Make sure to run this commands daily to send email alerts and clear obsolete timers (thanks to *cron* for instance) :

```
geotrek check_timers
```

16.5.5 Anonymize feedback reports

To be compliant to GDPR, you cannot keep personnal data infinitely, and should notice your users on how many time you keep their email.

A Django command is available to anonymize reports, by default older than 365 days.

```
geotrek erase_emails
```

Or if you want to erase emails for reports older than 90 days

```
geotrek erase_emails --days 90
```

16.6 Sensitive areas

In order to enable sensitivity module, in the custom settings file, add the following code:

```
# Enable sensitivity module
INSTALLED_APPS += ('geotrek.sensitivity', )
```

The following settings are related to sensitive areas:

```
SHOW_SENSITIVE AREAS ON MAP SCREENSHOT = True

# Default radius of sensitivity bubbles when not specified for species
SENSITIVITY_DEFAULT_RADIUS = 100 # meters

# Buffer around treks to intersects sensitive areas
SENSITIVE AREA INTERSECTION_MARGIN = 500 # meters
```

To take these changes into account, you need to run :

```
sudo dpkg-reconfigure -u geotrek-admin
```

16.7 Diving

In order to enable diving module, in the custom settings file, add the following code:

```
# Enable diving module
INSTALLED_APPS += ('geotrek.diving', )
```

Then run `sudo dpkg-reconfigure -pcritical geotrek-admin`.

You can also insert diving minimal data (default practices, difficulties, levels and group permissions values):

```
sudo geotrek loaddata /opt/geotrek-admin/lib/python*/site-packages/geotrek/diving/
˓→fixtures/basic.json
cp /opt/geotrek-admin/lib/python*/site-packages/geotrek/diving/fixtures/upload/* /opt/
˓→geotrek-admin/var/media/upload/
```

You can insert licenses of attachments with this command :

```
sudo geotrek loaddata /opt/geotrek-admin/lib/python*/site-packages/geotrek/common/
˓→fixtures/licenses.json
```

16.8 Outdoor

In order to enable Outdoor module, in the custom settings file, add the following code:

```
# Enable Outdoor module
INSTALLED_APPS += ('geotrek.outdoor', )
```

Then run `sudo dpkg-reconfigure -pcritical geotrek-admin`.

You can also insert Outdoor minimal data:

```
sudo geotrek loaddata /opt/geotrek-admin/lib/python*/site-packages/geotrek/outdoor/
˓→fixtures/basic.json
```

After installing Outdoor module, you have to add permissions to your user groups on outdoor sites and courses.

Note: Outdoor module is not compatible with PostGIS <= 2.4 that is included in Ubuntu 18.04. You should either upgrade to Ubuntu 20.04 or upgrade postGIS to 2.5 with <https://launchpad.net/~ubuntugis/+archive/ubuntu/ppa>

16.9 Swagger

In order to enable swagger module to auto-document API /api/v2/, in the custom settings file, add the following code:

```
# Enable API v2 documentation
INSTALLED_APPS += ('drf_yasg', )
```

Then run `sudo dpkg-reconfigure -u geotrek-admin`.

16.10 WYSIWYG editor configuration

Text form fields are enhanced using TinyMCE.

Its configuration can be customized using advanced settings (see above paragraph).

For example, in order to control which buttons are to be shown, and which tags are to be kept when cleaning-up, add this bloc :

```
TINYMCE_DEFAULT_CONFIG = {
    'theme_advanced_buttons1': 'bold,italic,forecolor,separator,code',
    'valid_elements': "img,p,a,em/i,strong/b",
}
```

This will apply to all text fields.

For more information on configuration entries available, please refer to the official documentation of *TinyMCE version 3*.

16.10.1 Max characters count

Add `MAX_CHARACTERS` setting to be able to define a maximum number of characters for text fields (to be used with django-mapentity >= 8.1).

```
MAPENTITY_CONFIG['MAX_CHARACTERS'] = 1500
```

This will apply to all text fields. See [this issue](#) for details.

16.11 View attachments in the browser

Attached files are downloaded by default by browser, with the following line, files will be opened in the browser :

```
MAPENTITY_CONFIG['SERVE_MEDIA_AS_ATTACHMENT'] = False
```

16.12 Change or add WMTS tiles layers (IGN, OSM, Mapbox...)

By default, you have 2 basemaps layers in your Geotrek-admin (OSM and OSM black and white).

You can change or add more basemaps layers.

Specify the tiles URLs this way in your custom Django setting file:

```
LEAFLET_CONFIG['TILES'] = [
    ('OSM', 'http://{s}.tile.openstreetmap.org/{z}/{x}/{y}.png', '@ OpenStreetMap  
Contributors'),
    ('OpenTopoMap', 'http://a.tile.opentopomap.org/{z}/{x}/{y}.png', 'Map data: @  
OpenStreetMap contributors, SRTM | Map style: © OpenTopoMap (CC-BY-SA)'),
]
```

Example with IGN and OSM basemaps :

```
LEAFLET_CONFIG['TILES'] = [
    ('IGN Scan', '//wxs.ign.fr/YOURAPIKEY/wmts?LAYER=GEOGRAPHICALGRIDSYSTEMS.MAPS&  
EXCEPTIONS=image/jpeg&FORMAT=image/jpeg&SERVICE=WMTS&VERSION=1.0.0&REQUEST=GetTile&  
STYLE=normal&TILEMATRIXSET=PM&TILEMATRIX={z}&TILEROW={y}&TILECOL={x}', '@ IGN  
Geoportail'),
    ('IGN Plan V2', '//wxs.ign.fr/essentiels/geoportail/wmts?  
LAYER=GEOGRAPHICALGRIDSYSTEMS.PLANIGNV2&EXCEPTIONS=image/png&FORMAT=image/png&  
SERVICE=WMTS&VERSION=1.0.0&REQUEST=GetTile&STYLE=normal&TILEMATRIXSET=PM&TILEMATRIX={z}'
```

(continues on next page)

(continued from previous page)

```

->&TILEROW={y}&TILECOL={x}', '@ IGN Geoportail'),
    ('IGN Ortho', '//wxs.ign.fr/essentiels/geoportail/wmts?LAYER=ORTHOIMAGERY.
->ORTHOPHOTOS&EXCEPTIONS=image/jpeg&FORMAT=image/jpeg&SERVICE=WMTS&VERSION=1.0.0&
->REQUEST=GetTile&STYLE=normal&TILEMATRIXSET=PM&TILEMATRIX={z}&TILEROW={y}&TILECOL={x}' ,
->'@ IGN Geoportail'),
    ('IGN Cadastre', '//wxs.ign.fr/essentiels/geoportail/wmts?LAYER=CADASTRALPARCELS.
->PARCELLAIRE_EXPRESS&EXCEPTIONS=image/jpeg&FORMAT=image/png&SERVICE=WMTS&VERSION=1.0.0&
->REQUEST=GetTile&STYLE=bddparcellaire_o&TILEMATRIXSET=PM&TILEMATRIX={z}&TILEROW={y}&
->TILECOL={x}', '@ IGN Geoportail'),
    ('OSM', 'https://s.tile.openstreetmap.org/{z}/{x}/{y}.png', '@ OpenStreetMap
->contributors'),
    ('OSM Stamen Terrain', '//tile.stamen.com/terrain/{z}/{x}/{y}.jpg', '@ OpenStreetMap
->contributors / Stamen Design'),
    ('OpenTopoMap', 'https://a.tile.opentopomap.org/{z}/{x}/{y}.png', 'Map data: @
->OpenStreetMap contributors, SRTM | Map style: @ OpenTopoMap (CC-BY-SA)')
]

```

To use some IGN Geoportail WMTS tiles (Scan25, Scan100, etc.), you may need an API key. You can find more information about this on <https://geoservices.ign.fr/services-web-issus-des-scans-ign>.

16.13 External authent

You can authenticate user against a remote database table or view.

To enable this feature, fill these fields in `/opt/geotrek-admin/var/conf/custom.py`:

```

AUTHENT_DATABASE = 'authent'
DATABASES['authent'] = {
    'ENGINE': 'django.contrib.gis.db.backends.postgis',
    'NAME': '<database name>',
    'USER': '<user name>',
    'PASSWORD': '<password>',
    'HOST': '<host>',
    'PORT': '<port>',
}
AUTHENT_TABLENAME = '<table name>'
AUTHENTICATION_BACKENDS = ['geotrek.authent.backend.DatabaseBackend']

```

Expected columns in table/view are :

- username : string (*unique*)
- first_name : string
- last_name : string
- password : string (simple md5 encoded, or full hashed and salted password)
- email : string
- level : integer (1: readonly, 2: redactor, 3: path manager, 4: trekking manager, 5: management and trekking editor, 6: administrator)
- structure : string
- lang : string (language code)

Note: The schema used in AUTHENT_TABLENAME must be in the user search_path (ALTER USER \$geotrek_db_user SET search_path=public,userschema;)

User management will be disabled from Administration backoffice.

In order to disable remote login, just comment *AUTHENTICATION_BACKENDS* line in settings file, and restart instance (see paragraph above).

Geotrek-admin can support many types of users authentication (LDAP, oauth, ...), contact us for more details.

16.14 Map layers colors and style

All layers colors can be customized from the settings. See Leaflet reference for vectorial layer style.

- To apply these style changes, re-run sudo systemctl restart geotrek.

```
MAPENTITY_CONFIG['MAP_STYLES']['path'] = {'color': 'red', 'weight': 5}
```

Or change just one parameter (the opacity for example) :

```
MAPENTITY_CONFIG['MAP_STYLES']['city']['opacity'] = 0.8
```

Regarding colors that depend from database content, such as land layers (physical types, work management...) or restricted areas. We use a specific setting that receives a list of colors :

```
COLORS_POOL['restrictedarea'] = ['#ff00ff', 'red', '#dddddd'...]
```

See the default values in `geotrek/settings/base.py` for the complete list of available styles.

Restart the application for changes to take effect.

16.15 External raster layers

It is possible to add overlay tiles layer on maps. For example, it can be useful to:

- Get the cadastral parcels on top of satellite images
- Home made layers (*with Tilemill or QGisMapserver for example*). Like the park center borders, traffic maps, IGN BDTopo® or even the Geotrek paths that are marked as invisible in the database!

In `custom.py`, just add the following lines:

```
LEAFLET_CONFIG['OVERLAYS'] = [
    ('Cadastral', '//wxs.ign.fr/essentiels/geoportail/wmts?LAYER=CADASTRALPARCELS.
    ↳PARCELLAIRE_EXPRESS&EXCEPTIONS=image/jpeg&FORMAT=image/png&SERVICE=WMTS&VERSION=1.0.0&
    ↳REQUEST=GetTile&STYLE=normal&TILEMATRIXSET=PM&TILEMATRIX={z}&TILEROW={y}&TILECOL={x}' ,
    ↳'&copy; IGN - GeoPortail')
    ('Coeur de parc', 'http://serveur/coeur-parc/{z}/{x}/{y}.png', '&copy; PNF'),
]
```

16.15.1 Expected properties

For GeoJSON files, you can provide the following properties :

- `title`: string
- `description`: string
- `website`: string
- `phone`: string
- `pictures`: list of objects with `url` and `copyright` attributes
- `category`: object with `id` and `label` attributes

16.16 Disable darker map backgrounds

Since IGN map backgrounds are very dense and colourful, a dark opacity is applied. In order to disable, change this MapEntity setting :

```
MAPENTITY_CONFIG['MAP_BACKGROUND_FOGGED'] = False
```

16.17 Configure Social network

16.17.1 Facebook configuration

When a content is shared to Facebook in Geotrek-rando, it needs static html files built by synchronization (thanks to option `--rando-url`).

In Facebook developer dashboard, create a Facebook app dedicated to Geotrek-rando and activate it.

The screenshot shows the Facebook for Developers dashboard. At the top, there's a navigation bar with links for Documentation, Outils, and Aide. On the left, a sidebar menu includes options like Tableau de bord, Paramètres, Rôles, Alertes, Contrôle app, PRODUITS (+), and Journal des activités. The main content area is titled "Plafond de l'application" and displays information for the "Geotrek" app. It shows the app icon, the ID "ID de l'app : [REDACTED]", and a progress bar indicating "0 % de la limite utilisée" (0% of the limit used) with "100 % restants" (100% remaining). A button labeled "Voir les détails" (View details) is also visible.

In `custom.py` set Facebook App ID:

```
FACEBOOK_APP_ID = '<your Facebook AppID>'
```

you can also override these settings:

```
FACEBOOK_IMAGE = '/images/logo-geotrek.png'
FACEBOOK_IMAGE_WIDTH = 200
FACEBOOK_IMAGE_HEIGHT = 200
```

16.18 Override translations

Translations are managed by <https://weblate.makina-corpus.net/> where you can contribute. But you can also override default translation files available in each module (for example those from trekking module available in `/opt/geotrek-admin/lib/python3.6/site-packages/geotrek/trekking/locale/fr/LC_MESSAGES/django.po`).

Don't edit these default files, use them to find which words you want to override.

Create the custom translations destination folder:

Create a `django.po` file in `/opt/geotrek-admin/var/conf/extra_locale` directory. You can do one folder and one `django.po` file for each language (example `/opt/geotrek-admin/var/conf/extra_locale/fr/LC_MESSAGES/django.po` for French translation overriding)

Override the translations that you want in these files.

Example of content for the French translation overriding:

```
# MY FRENCH CUSTOM TRANSLATION
# Copyright (C) YEAR THE PACKAGE'S COPYRIGHT HOLDER
# This file is distributed under the same license as the PACKAGE package.
# FIRST AUTHOR <EMAIL@ADDRESS>, YEAR.
#
msgid ""
msgstr ""
"Report-Msgid-Bugs-To: \n"
"POT-Creation-Date: 2018-11-15 15:32+0200\n"
"PO-Revision-Date: 2018-11-15 15:33+0100\n"
"Last-Translator: \n"
"Language-Team: LANGUAGE <LL@li.org>\n"
"MIME-Version: 1.0\n"
"Content-Type: text/plain; charset=UTF-8\n"
"Content-Transfer-Encoding: 8bit\n"
"Project-Id-Verésion: PACKAGE VERSION\n"
"Plural-Forms: nplurals=2; plural=(n > 1);\n"
"Project-Id-Version: \n"
"X-Generator: Poedit 1.5.4\n"

msgid "City"
msgstr "Région"

msgid "District"
msgstr "Pays"
```

Apply changes (French translation in this example) :

```
cd /opt/geotrek-admin/var/conf/extra_locale  
sudo chown geotrek. fr/LC_MESSAGES/  
sudo geotrek compilemessages  
sudo service geotrek restart
```

16.19 Override public PDF templates

PDF are generated from HTML templates, using [Django templating](#). Treks, touristic contents, touristic events, outdoor sites and courses can be exported in PDF files.

- Treks : `geotrek/trekking/templates/trekking/ trek_public_pdf.html`
- Touristic contents : `geotrek/tourism/templates/tourism/touristiccontent_public_pdf.html`
- Touristic events : `geotrek/tourism/templates/tourism/touristiccontent_public_pdf.html`
- Outdoor sites : `geotrek/outdoor/templates/outdoor/site_public_pdf.html`
- Outdoor courses : `geotrek/outdoor/templates/outdoor/course_public_pdf.html`

Overriden templates have to be located in `/opt/geotrek-admin/var/conf/extra_templates/<appname>`, with `<appname>` = `trekking` or `tourism`. To override trekking PDF for example, copy the file `geotrek/trekking/templates/trekking/ trek_public_pdf.html` to `/opt/geotrek-admin/var/conf/extra_templates/ trekking/ trek_public_pdf.html`. Or add inside your file :

```
{% extends "trekking/ trek_public_pdf.html" %}
```

These templates derive from base templates, which content is organized in blocks. To override for example the description block of trek PDF, copy and change the `{% block description %}...{% endblock description %}` in your `/opt/geotrek-admin/var/conf/extra_templates/trekking/ trek_public_pdf.html`.

It is also possible to use color defined for practice for pictogram by adding in your `/opt/geotrek-admin/var/conf/extra_templates/trekking/ trek_public_pdf.html` file :

```
{% block picto_attr %}style="background-color: {{ object.practice.color }};"{% endblock  
picto_attr %}
```

CSS can be overriden like html templates: copy them to `var/media/templates/trekking/` or `var/media/templates/tourism/` folder `/opt/geotrek-admin/var/conf/extra_templates/trekking/ trek_public_pdf.css` for example.

You can also create a template for each portal.

Add a folder `portal_{id_portal}` (portal ids are located in the portal url path `/admin/common/targetportal/{id_portal}`) in `/opt/geotrek-admin/var/conf/extra_templates/<appname>`, as the first template, and add at the top of your file:

```
{% extends "trekking/ trek_public_pdf.html" %}
```

The template for a specific portal will use the modification made on the overriden template in `/opt/geotrek-admin/var/conf/extra_templates/<appname>` (except if you change specific block)

Note: This modification is not mandatory, if you have multiple portal and you want to modify the template of only one portal, you create one folder for this specific portal

You might need to use your own images in the PDF templates.

Add your own images in /opt/geotrek-admin/var/conf/extra_static/images/.

You can then use these images in your PDF templates with `{% static 'images/file.jpg' %}`, after adding `{% load static %}` at the top of the file.

Example of a customised template (/opt/geotrek-admin/var/conf/extra_templates/trekking/ trek_public_pdf.html) with a customised logo and URL:

```
{% extends "trekking/ trek_public_pdf.html" %}
{% load static %}

{% block logo %}

{% endblock %}
{% block url %}
<div class="main">Grand tour des Ecrins</div>
<div class="geo"><a href="https://www.grand-tour-ecrins.fr">grand-tour-ecrins.fr</a></
<div>
{% endblock url %}
```

Note: The default template may change in the future versions. You will be in charge of porting the modification to your copy.

Test your modifications by exporting a trek or a content to PDF from Geotrek-admin application. To get your modifications available for Rando application, launch the sync_rando command.

16.20 Custom font in public document template

In order to use custom fonts in trek PDF, it is necessary to install the font files on the server.

Microsoft fonts like *Arial* and *Verdana* can be installed via the package manager:

```
sudo apt-get install ttf-mscorefonts-installer
```

For specific fonts, copy the `.ttf` (or `.otf`) files into the folder `/usr/local/share/fonts/custom/` as root, and run the following command:

```
fc-cache
```

For more information, check out Ubuntu documentation.

16.21 Custom colors in public document template

Trek export geometries are translucid red by default. In order to control the apparence of objects in public trek PDF exports, use the following setting:

```
MAPENTITY_CONFIG['MAP_STYLES']['print']['path'] = {'weight': 3}
```

See *Leaflet* reference documentation for detail about layers apparence.

16.22 Primary color in PDF templates

You can override PRIMARY_COLOR to change emphase text in PDF export. Beware of contrast, white colour is used for text so we advise you to avoid light colour.

16.23 Custom logos

You might also need to deploy logo images in the following places :

- var/conf/extra_static/images/favicon.png
- var/conf/extra_static/images/logo-login.png
- var/conf/extra_static/images/logo-header.png

16.24 Copyright on pictures

If you want copyright added to your pictures, change THUMBNAIL_COPYRIGHT_FORMAT to this :

```
THUMBNAIL_COPYRIGHT_FORMAT = "{title} {author}"
```

You can also add {legend}.

```
THUMBNAIL_COPYRIGHT_SIZE = 15
```

16.25 Resizing uploaded pictures

Attached pictures can be resized at upload by enabling PAPERCLIP_RESIZE_ATTACHMENTS_ON_UPLOAD :

```
PAPERCLIP_RESIZE_ATTACHMENTS_ON_UPLOAD = True
```

These corresponding height/width parameters can be overriden to select resized image size :

```
PAPERCLIP_MAX_ATTACHMENT_WIDTH = 1280  
PAPERCLIP_MAX_ATTACHMENT_HEIGHT = 1280
```

16.26 Prohibit usage of big pictures and small width / height

If you want to prohibit the usage of heavy pictures :

```
PAPERCLIP_MAX_BYTES_SIZE_IMAGE = 50000 # Bytes
```

If you want to prohibit the usage of small pictures in pixels :

```
PAPERCLIP_MIN_IMAGE_UPLOAD_WIDTH = 100
PAPERCLIP_MIN_IMAGE_UPLOAD_HEIGHT = 100
```

These 3 settings will also not allow downloading images from the parsers.

16.27 Prohibit usage of certain file types

Paperclip will only accept attachment files matching a list of allowed extensions. Here is the default value for this setting, which you can extend if needed :

```
PAPERCLIP_ALLOWED_EXTENSIONS = [
    'jpeg',
    'jpg',
    'mp3',
    'mp4',
    'odt',
    'pdf',
    'png',
    'svg',
    'txt',
    'gif',
    'tiff',
    'tif',
    'docx',
    'webp',
    'bmp',
    'flac',
    'mpeg',
    'doc',
    'ods',
    'gpx',
    'xls',
    'xlsx',
    'odg',
]
```

It will verify that the mimetype of the file matches the extension. You can add extra allowed mimetypes for a given extension with the following syntax :

```
PAPERCLIP_EXTRA_ALLOWED_MIMETYPES['gpx'] = ['text/xml']
```

You can also entirely deactivate these checks with the following :

```
PAPERCLIP_ALLOWED_EXTENSIONS = None
```

These 2 settings will also not allow downloading images from the parsers.

16.28 Share services between several Geotrek instances

As explained [in the design section](#), *Geotrek-admin* relies on several services. They are generic and reusable, and can thus be shared between several instances, in order to save system resources for example.

A simple way to achieve this is to install one instance with everything as usual (*standalone*), and plug the other instances on its underlying services.

16.28.1 Capture and conversion

If you want to use external services, in `.env`, add following variables:

```
CAPTURE_HOST=x.x.x.x
CAPTURE_PORT=XX
CONVERSION_HOST=x.x.x.x
CONVERSION_PORT=XX
```

Then, you can delete all screamshotter and convertit references in `docker-compose.yml`.

16.28.2 Shutdown useless services

Now that your instances point the shared server. You can shutdown the useless services on each instance.

Start by stopping everything :

```
sudo systemctl stop geotrek
```

16.29 Control number of workers and request timeouts

By default, the application runs on 4 processes, and timeouts after 30 seconds.

To control those values, edit and fix your `docker-compose.yml` file in web and api section.

To know how many workers you should set, please refer to [gunicorn documentation](#).

16.30 Configure columns displayed in lists views and exports

For each module, use the following syntax to configure columns to display in the main table.

```
COLUMNS_LISTS['<module>_view'] = ['list', 'of', 'columns']
```

For each module, use the following syntax to configure columns to export as CSV or SHP.

```
COLUMNS_LISTS['<module>_export'] = ['list', 'of', 'columns']
```

Please refer to the “settings detail” section for a complete list of modules and available columns.

Another setting exists to enable a more detailed export of jobs costs in the interventions module. When enabling this settings, interventions list exports will contain a new column for each job’s total cost.

```
ENABLE_JOBS_COSTS_DETAILED_EXPORT = True
```

16.31 Configure form fields in creation views

For each module, use the following syntax to configure fields to hide in the creation form.

```
HIDDEN_FORM_FIELDS['<module>'] = ['list', 'of', 'fields']
```

Please refer to the “settings detail” section for a complete list of modules and hideable fields.

16.32 Configure form fields required or needed for review or publication

Set ‘error_on_publication’ to avoid publication without completeness fields and ‘error_on_review’ if you want this fields to be required before sending to review.

```
COMPLETENESS_LEVEL = 'warning'
```

For each module, configure fields to be needed or required on review or publication

```
COMPLETENESS_FIELDS = {
    'trek': ['practice', 'departure', 'duration', 'difficulty', 'description_teaser'],
    'dive': ['practice', 'difficulty', 'description_teaser'],
}
```

CHAPTER
SEVENTEEN

SETTINGS DETAILS

17.1 Basic settings

Spatial reference identifier

```
SRID = 2154
```

Spatial reference identifier of your database. Default 2154 is RGF93 / Lambert-93 - France

It should not be change after any creation of geometries.

Choose wisely with epsg.io for example

Default Structure

```
DEFAULT_STRUCTURE_NAME = "GEOTEAM"
```

Name for your default structure.

This one can be changed, except it's tricky.

- *First change the name in the admin (authent/structure),*
- *Stop your instance admin.*
- *Change in the settings*
- *Re-run the server.*

Translations

```
MODELTRANSLATION_LANGUAGES = ('en', 'fr', 'it', 'es')
```

Languages of your project. It will be used to generate fields for translations. (ex: description_fr, description_en)


You won't be able to change it easily, avoid to add any languages and do not remove any.

17.2 Advanced settings

Spatial Extent

```
SPATIAL_EXTENT = (105000, 6150000, 1100000, 7150000)
```

Boundingbox of your project : x minimum , y minimum , x max, y max



If you extend spatial extent, don't forget to load a new DEM that covers all the zone. If you shrink spatial extent, be sure there is no element in the removed zone or you will no more be able to see and edit it.

API

```
API_IS_PUBLIC = True
```

Choose if you want the API V2 to be available for everyone without authentication. This API provides access to promotion content (Treks, POIs, Touristic Contents...). Set to False if Geotrek is intended to be used only for managing content and not promoting them. Note that this setting does not impact the Path endpoints, which means that the Paths informations will always need authentication to be display in the API, regardless of this setting.

Dynamic segmentation

```
TREKKING_TOPOLOGY_ENABLED = True
```

Use dynamic segmentation or not.

Do not change it after installation, or dump your database.

Map configuration

```
LEAFLET_CONFIG['TILES'] = [
    ('Scan', '//wxs.ign.fr/<key>/wmts?LAYER=GEOGRAPHICALGRIDSYSTEMS.MAPS.SCAN-EXPRESS.
    ↪STANDARD&EXCEPTIONS=image/jpeg&FORMAT=image/jpeg&SERVICE=WMTS&VERSION=1.0.0&
    ↪REQUEST=GetTile&STYLE=normal&TILEMATRIXSET=PM&TILEMATRIX={z}&TILEROW={y}&TILECOL={x}' ,
     '&copy; IGN - GeoPortail'),
    ('Ortho', '//wxs.ign.fr/<key>/wmts?LAYER=ORTHOIMAGERY.ORTHOPHOTOS&EXCEPTIONS=image/
    ↪jpeg&FORMAT=image/jpeg&SERVICE=WMTS&VERSION=1.0.0&REQUEST=GetTile&STYLE=normal&
    ↪TILEMATRIXSET=PM&TILEMATRIX={z}&TILEROW={y}&TILECOL={x}' ,
     '&copy; IGN - GeoPortail'),
    ('Cadastre', '//wxs.ign.fr/<key>/wmts?LAYER=CADASTRALPARCELS.PARCELS&
    ↪EXCEPTIONS=image/jpeg&FORMAT=image/png&SERVICE=WMTS&VERSION=1.0.0&REQUEST=GetTile&
    ↪STYLE=normal&TILEMATRIXSET=PM&TILEMATRIX={z}&TILEROW={y}&TILECOL={x}' ,
     '&copy; IGN - GeoPortail'),
    ('OSM', 'http://{s}.tile.osm.org/{z}/{x}/{y}.png', '&copy; OSM contributors'),
]
```

```
LEAFLET_CONFIG['OVERLAYS'] = [
```

(continues on next page)

(continued from previous page)

```
('Cadastre',
  '//wxs.ign.fr/<key>/wmts?LAYER=CADASTRALPARCELS.PARCELS&EXCEPTIONS=text/xml&
  ↪FORMAT=image/png&SERVICE=WMTS&VERSION=1.0.0&REQUEST=GetTile&STYLE=bdparcellaire_o&
  ↪TILEMATRIXSET=PM&TILEMATRIX={z}&TILEROW={y}&TILECOL={x}' ,
  '&copy; IGN - GeoPortail'),
]
```

Configuration of the tiles.

If you want to change it, Change the array like that:

```
LEAFLET_CONFIG['TILES'] = [('NAME_OF_TILE', 'URL', 'COPYRIGHT'), ...]
```

It's the same for the overlay but use only transparent tiles.

```
LEAFLET_CONFIG['MAX_ZOOM'] = 19
```

You can define the max_zoom the user can zoom for all tiles.

It can be interesting when your tiles can't go to a zoom. For example OpenTopoMap is 17.

Enable Apps

```
FLATPAGES_ENABLED = True
```

Show Flatpages on menu or not. Flatpages are used in Geotrek-rando.

```
TOURISM_ENABLED = True
```

Show TouristicContents and TouristicEvents on menu or not.

```
TRAIL_MODEL_ENABLED = True
```


Show Trails on menu or not.

```
LANDEDGE_MODEL_ENABLED = True
```

Show land on menu or not.

```
LAND_BBOX_CITIES_ENABLED = True  
LAND_BBOX_DISTRICTS_ENABLED = True  
LAND_BBOX.Areas_ENABLED = False
```

Show filter bbox by zoning.

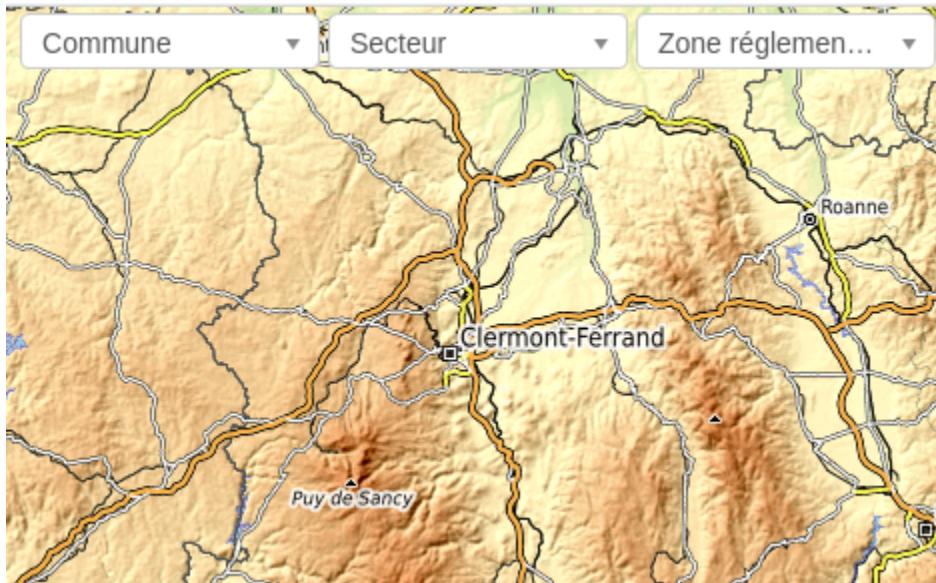

```
ACCESSIBILITY_ATTACHMENTS_ENABLED = True
```

Show or not the accessibility menu for attachments

Translations

```
LANGUAGE_CODE = 'fr'
```

Language of your interface.

Geographical CRUD

```
PATH_SNAPPING_DISTANCE = 2.0
```

Minimum distance to merge 2 paths in unit of SRID

Change the distance. Better to keep it like this. Not used when `TREKKING_TOPOLOGY_ENABLED = True`.

```
SNAP_DISTANCE = 30
```

Distance of snapping for the cursor in pixels on Leaflet map.

```
PATH_MERGE_SNAPPING_DISTANCE = 2
```

Minimum distance to merge 2 paths.

Change the distance. Should be higher or the same as PATH_SNAPPING_DISTANCE

Used when TREKKING_TOPOLOGY_ENABLED = True

```
MAPENTITY_CONFIG['MAP_STYLES'] = {
    'path': {'weight': 2, 'opacity': 1.0, 'color': '#FF4800'},
    'draftpath': {'weight': 5, 'opacity': 1, 'color': 'yellow', 'dashArray': '8, 8'},
    'city': {'weight': 4, 'color': 'orange', 'opacity': 0.3, 'fillOpacity': 0.0},
    'district': {'weight': 6, 'color': 'orange', 'opacity': 0.3, 'fillOpacity': 0.0,
    ↵ 'dashArray': '12, 12'},
    'restrictedarea': {'weight': 2, 'color': 'red', 'opacity': 0.5, 'fillOpacity': 0.5},
    'land': {'weight': 4, 'color': 'red', 'opacity': 1.0},
    'physical': {'weight': 6, 'color': 'red', 'opacity': 1.0},
    'competence': {'weight': 4, 'color': 'red', 'opacity': 1.0},
    'workmanagement': {'weight': 4, 'color': 'red', 'opacity': 1.0},
    'signagemanagement': {'weight': 5, 'color': 'red', 'opacity': 1.0},
    'print': {'path': {'weight': 1,
        'trek': {'color': '#FF3300', 'weight': 7, 'opacity': 0.5,
            'arrowColor': 'black', 'arrowSize': 10},}}
}
```

Color of the different layers on the map

To change any map_style do as following:

```
MAPENTITY_CONFIG['MAP_STYLES']['path'] = {'weight': 2, 'opacity': 2.0, 'color
    ↵ ': 'yellow'}*
MAPENTITY_CONFIG['MAP_STYLES']['city']['opacity'] = 0.8*
```

For color: use color picker for example

```
COLORS_POOL = {'land': ['#f37e79', '#7998f3', '#bbf379', '#f379df', '#f3bf79', '#9c79f3',
    ↵ '#7af379'],
    'physical': ['#f3799d', '#79c1f3', '#e4f379', '#de79f3', '#79f3ba', '#f39779', '#797ff3'],
    'competence': ['#a2f379', '#f379c6', '#79e9f3', '#f3d979', '#b579f3', '#79f392', '#f37984'],
    'signagemanagement': ['#79a8f3', '#cbf379', '#f379ee', '#79f3e3', '#79f3d3'],
    'workmanagement': ['#79a8f3', '#cbf379', '#f379ee', '#79f3e3', '#79f3d3'],
    'restrictedarea': ['plum', 'violet', 'deeppink', 'orchid', 'darkviolet', 'lightcoral', 'palevioletred']}
```

(continues on next page)

(continued from previous page)

```
'MediumVioletRed', 'MediumOrchid', 'Magenta',
'LightSalmon', 'HotPink', 'Fuchsia']}}
```

Color of the different layers on the top right for landing.

- For land, physical, competence, signagemanagement, workmanagement should have 5 values.
- For restricted Area: add as many color as your number of restricted area type

To change any map_style do as following :

```
COLORS_POOL['restrictedarea'] = ['plum', 'violet', 'yellow', 'red', '#79a8f3']
MAPENTITY_CONFIG['MAP_STYLES']['city']['opacity'] = 0.8*
```

For color: use color picker for example

```
TREK_POINTS_OF_REFERENCE_ENABLED = True
```

Points of reference are enabled on form of treks.

```
OUTDOOR_COURSE_POINTS_OF_REFERENCE_ENABLED = True
```

Points of reference are enabled on form of otudoor courses.

```
TOPOLOGY_STATIC_OFFSETS = {'land': -5, 'physical': 0, 'competence': 5, 'signagemanagement':
↪ : -10, 'workmanagement': 10}
```

Land objects are added on other objects (path for example) with offset, avoiding overlay.

You should not change it to avoid overlay except if you want to have more overlay. You can do for example for :

```
TOPOLOGY_STATIC_OFFSETS = {'land': -7, 'physical': 0, 'competence': 7,
↪ 'signagemanagement': -14, 'workmanagement': 14}
```

```

ALTIMETRIC_PROFILE_PRECISION = 25 # Sampling precision in meters
ALTIMETRIC_PROFILE_AVERAGE = 2 # nb of points for altimetry moving average
ALTIMETRIC_PROFILE_STEP = 1 # Step min precision for positive / negative altimetry gain
ALTIMETRIC_PROFILE_BACKGROUND = 'white'
ALTIMETRIC_PROFILE_COLOR = '#F77E00'
ALTIMETRIC_PROFILE_HEIGHT = 400
ALTIMETRIC_PROFILE_WIDTH = 800
ALTIMETRIC_PROFILE_FONTSIZE = 25
ALTIMETRIC_PROFILE_FONT = 'ubuntu'
ALTIMETRIC_PROFILE_MIN_YSCALE = 1200 # Minimum y scale (in meters)
ALTIMETRIC_AREA_MAX_RESOLUTION = 150 # Maximum number of points (by width/height)
ALTIMETRIC_AREA_MARGIN = 0.15

```

All settings used to generate altimetric profile.

All these settings can be modified but you need to check the result every time

The only one modified most of the time is ALTIMETRIC_PROFILE_COLOR

Signage and Blade

BLADE_ENABLED and LINE_ENABLED settings (default to True) allow to enable or disable blades and lines submodules.

DIRECTION_ON_LINES_ENABLED setting (default to False) allow to have the *direction* field on lines instead of blades.

```
BLADE_CODE_TYPE = int
```

Type of the blade code (str or int)

It can be str or int.

If you have an integer code : int

If you have an string code : str

```
BLADE_CODE_FORMAT = "{signagecode}-{bladenumber}"
```

Correspond to the format of blades. Show N3-1 for the blade 1 of the signage N3.

If you want to change : move information under bracket

You can also remove one element between bracket

You can do for exemple : "CD99.{signagecode}.{bladenumber}"

It will display : CD99.XIDNZEIU.01 (first blade of XIDNZEIU)

- *signagecode is the code of the signage*
- *bladenumber is the number of the blade*

```
LINE_CODE_FORMAT = "{signagecode}-{bladenum}- {linenumber}"
```

Correspond to the format used in export of lines. Used in csv of signage.

Similar with above You can do for example : “CD99.{signagecode}-{bladenum}.{linenumber}”

It will display : CD99.XIDNZEIU-01.02 (second line of the first blade of XIDNZEIU)

- *signagecode is the code of the signage*
- *bladenum is the number of the blade*
- *linenumber is the number of the line*

Screenshots

```
SHOW_SENSITIVE AREAS ON MAP SCREENSHOT = True  
SHOW_POIS_ON_MAP_SCREENSHOT = True  
SHOW_SERVICES_ON_MAP_SCREENSHOT = True  
SHOW_SIGNAGES_ON_MAP_SCREENSHOT = True  
SHOW_INFRASTRUCTURES_ON_MAP_SCREENSHOT = True
```

Show objects on maps of PDF

```
MAP_CAPTURE_SIZE = 800
```

Size in pixels of the capture.

Be careful with your pdfs. If you change this value, pdfs will be rendered differently

Synchro Geotrek-rando

```
SYNC_RANDO_ROOT = os.path.join(VAR_DIR, 'data')
```

Path on your server where the data for Geotrek-rando website will be generated

If you want to modify it, do not forget to import os at the top of the file. Check import Python , if you need any information

```
THUMBNAIL_COPYRIGHT_FORMAT = ""
```

Add a thumbnail on every picture for Geotrek-rando

Example :

“{title}--{author}--{legend}”

Will display title of the picture, author and the legend : Puy de Dômes--Paul Paul--Beautiful sunrise on Puy de Dômes”

THUMBNAIL_COPYRIGHT_SIZE = 15

Size of the thumbnail.

TOURISM_INTERSECTION_MARGIN = 500

Distance to which tourist contents, tourist events, treks, pois, services will be displayed

This distance can be changed by practice for treks in the admin.

DIVING_INTERSECTION_MARGIN = 500

Distance to which dives will be displayed.

TREK_EXPORT_POI_LIST_LIMIT = 14

Limit of the number of pois on treks pdf.

14 is already a huge amount of POI, but it's possible to add more

TREK_EXPORT_INFORMATION_DESK_LIST_LIMIT = 2

Limit of the number of information desks on treks pdf.

You can put -1 if you want all the information desks

SPLIT_TREKS_CATEGORIES_BY_PRACTICE = False

On the Geotrek-rando v2 website, treks practices will be displayed separately

Field order for each practices in admin will be take in account

```
SPLIT_TREKS_CATEGORIES_BY_ACCESSIBILITY = False
```

On the Geotrek-rando v2 website, accessibilites will be displayed separately

```
SPLIT_TREKS_CATEGORIES_BY_ITINERANCY = False
```

On the Geotrek-rando v2 website, if a trek has a children it will be displayed separately

```
SPLIT_DIVES_CATEGORIES_BY_PRACTICE = True
```

On the Geotrek-rando v2 website, dives practices will be displayed separately

```
HIDE_PUBLISHED_TREKS_IN_TOPOLOGIES = False
```

On the Geotrek-rando v2 website, treks near other are hidden

```
SYNC_RANDO_OPTIONS = {}
```

Options of the sync_rando command in Geotrek-admin interface.

```
TREK_WITH_POIS_PICTURE = False
```

It enables correlated pictures on Gotrek-rando v2 to be displayed in the slideshow

```
PRIMARY_COLOR = "#7b8c12"
```

Primary color of your PDF

check : “color picker”

```
ONLY_EXTERNAL_PUBLIC_PDF = False
```

On Geotrek-rando v2 website, only PDF imported with filetype “Topoguide” will be used and not autogenerated.

```
TREK_CATEGORY_ORDER = 1
ITINERANCY_CATEGORY_ORDER = 2
DIVE_CATEGORY_ORDER = 10
TOURISTIC_EVENT_CATEGORY_ORDER = 99
```

Order of all the objects without practices on Geotrek-rando website

All the settings about order are the order inside Geotrek-rando website.

Practices of diving, treks and categories of touristic contents are taken in account

Synchro Geotrek-mobile

```
SYNC_MOBILE_ROOT = os.path.join(VAR_DIR, 'mobile')
```

Path on your server where the datas for mobile will be saved

If you want to modify it, do not forget to import os at the top of the file. Check import Python , if you need any information

```
SYNC_MOBILE_OPTIONS = {'skip_tiles': False}
```

Options of the sync_mobile command

```
MOBILE_NUMBER_PICTURES_SYNC = 3
```

Number max of pictures that will be displayed and synchronized for each object (trek, poi, etc.) in the mobile app.

```
MOBILE_TILES_URL = ['https://{}.{}/tile.opentopomap.org/{}z/{}x/{}y.png']
```

URL's Tiles used for the mobile.

Change for IGN:

```
MOBILE_TILES_URL = ['https://{}s.tile.opentopomap.org/{z}/{x}/{y}.png']
```

```
MOBILE_LENGTH_INTERVALS = [
    {"id": 1, "name": "< 10 km", "interval": [0, 9999]},
    {"id": 2, "name": "10 - 30", "interval": [9999, 29999]},
    {"id": 3, "name": "30 - 50", "interval": [30000, 50000]},
    {"id": 4, "name": "> 50 km", "interval": [50000, 999999]}
]
```

Intervals of the mobile for the length filter

Interval key is in meters. You can add new intervals

```
MOBILE_LENGTH_INTERVALS = [
    {"id": 1, "name": "< 10 km", "interval": [0, 9999]},
    {"id": 2, "name": "10 - 30 km", "interval": [9999, 29999]},
    {"id": 3, "name": "30 - 50 km", "interval": [30000, 50000]},
    {"id": 4, "name": "50 - 80 km", "interval": [50000, 80000]},
    {"id": 5, "name": "> 80 km", "interval": [80000, 999999]}
]
```

```
MOBILE_ASCENT_INTERVALS = [
    {"id": 1, "name": "< 300 m", "interval": [0, 299]},
    {"id": 2, "name": "300 - 600", "interval": [300, 599]},
    {"id": 3, "name": "600 - 1000", "interval": [600, 999]},
    {"id": 4, "name": "> 1000 m", "interval": [1000, 9999]}
]
```

Intervals of the mobile for the ascent filter

Do the same as above

```
MOBILE_DURATION_INTERVALS = [
    {"id": 1, "name": "< 1 heure", "interval": [0, 1]},
    {"id": 2, "name": "1h - 2h30", "interval": [1, 2.5]},
    {"id": 3, "name": "2h30 - 5h", "interval": [2.5, 5]},
    {"id": 4, "name": "5h - 9h", "interval": [5, 9]},
    {"id": 5, "name": "> 9h", "interval": [9, 99999999]}
]
```

Intervals of the mobile for the duration filter

Check MOBILE_LENGTH_INTERVALS comment to use it, here interval correspond to 1 unit of hour

```
ENABLED_MOBILE_FILTERS = [
    'practice',
    'difficulty',
    'durations',
    'ascent',
    'lengths',
    'themes',
    'route',
    'districts',
    'cities',
    'accessibilities',
]
```

List of all the filters enabled on mobile.

Remove any of the filters if you don't want one of them. It's useless to add other one.

Custom columns available

A (nearly?) exhaustive list of attributes available for display and export as columns in each module.

```
COLUMNS_LISTS["path_view"] = [
    "length_2d",
    "valid",
    "structure",
    "visible",
    "min_elevation",
    "max_elevation",
    "date_update",
    "date_insert",
    "stake",
    "networks",
    "comments",
    "departure",
    "arrival",
    "comfort",
    "source",
    "usages",
    "draft",
    "trails",
    "uuid",
]
COLUMNS_LISTS["trail_view"] = [
```

(continues on next page)

(continued from previous page)

```
"departure",
"arrival",
"category",
"length",
"structure",
"min_elevation",
"max_elevation",
"date_update",
"length_2d",
"date_insert",
"comments",
"uuid",
]
COLUMNS_LISTS["landedge_view"] = [
    "eid",
    "min_elevation",
    "max_elevation",
    "date_update",
    "length_2d",
    "date_insert",
    "owner",
    "agreement",
    "uuid",
]
COLUMNS_LISTS["physicaledge_view"] = [
    "eid",
    "date_insert",
    "date_update",
    "length",
    "length_2d",
    "min_elevation",
    "max_elevation",
    "uuid",
]
COLUMNS_LISTS["competenceedge_view"] = [
    "eid",
    "date_insert",
    "date_update",
    "length",
    "length_2d",
    "min_elevation",
    "max_elevation",
    "uuid",
]
COLUMNS_LISTS["signagemanagementedge_export"] = [
    "eid",
    "date_insert",
    "date_update",
    "length",
    "length_2d",
    "min_elevation",
    "max_elevation",
```

(continues on next page)

(continued from previous page)

```

    "uuid",
    "provider"
]
COLUMNS_LISTS["workmanagementedge_export"] = [
    "eid",
    "date_insert",
    "date_update",
    "length",
    "length_2d",
    "min_elevation",
    "max_elevation",
    "uuid",
]
COLUMNS_LISTS["infrastructure_view"] = [
    "condition",
    "cities",
    "structure",
    "type",
    "description",
    "accessibility",
    "date_update",
    "date_insert",
    "implantation_year",
    "usage_difficulty",
    "maintenance_difficulty",
    "published",
    "uuid",
    "eid",
    "provider",
    "access"
]
COLUMNS_LISTS["signage_view"] = [
    "code",
    "type",
    "condition",
    "structure",
    "description",
    "date_update",
    "date_insert",
    "implantation_year",
    "printed_elevation",
    "coordinates",
    "sealing",
    "access",
    "manager",
    "published",
    "uuid",
]
COLUMNS_LISTS["intervention_view"] = [
    "date",
    "type",
    "target",
]

```

(continues on next page)

(continued from previous page)

```
"status",
"stake",
"structure",
"subcontracting",
"status",
"disorders",
"length",
"material_cost",
"min_elevation",
"max_elevation",
"heliport_cost",
"subcontract_cost",
"date_update",
"date_insert",
"description",
]
COLUMNS_LISTS["project_view"] = [
    "structure",
    "begin_year",
    "end_year",
    "constraint",
    "global_cost",
    "type",
    "date_update",
    "domain",
    "contractors",
    "project_owner",
    "project_manager",
    "founders",
    "date_insert",
    "comments",
]
COLUMNS_LISTS["trek_view"] = [
    "structure",
    "departure",
    "arrival",
    "duration",
    "description_teaser",
    "description",
    "gear",
    "route",
    "difficulty",
    "ambiance",
    "access",
    "accessibility_infrastructure",
    "advised_parking",
    "parking_location",
    "public_transport",
    "themes",
    "practice",
    "min_elevation",
    "max_elevation",
]
```

(continues on next page)

(continued from previous page)

```

"length_2d",
"date_update",
"date_insert",
"accessibilities",
"accessibility_advice",
"accessibility_covering",
"accessibility_exposure",
"accessibility_level",
"accessibility_signage",
"accessibility_slope",
"accessibility_width",
"ratings_description",
"ratings",
"points_reference",
"source",
"reservation_system",
"reservation_id",
"portal",
"uuid",
"eid",
"eid2",
"provider"
]
COLUMNS_LISTS["poi_view"] = [
    "structure",
    "description",
    "type",
    "min_elevation",
    "date_update",
    "date_insert",
    "uuid",
]
COLUMNS_LISTS["service_view"] = [
    "structure",
    "min_elevation",
    "type",
    "length_2d",
    "date_update",
    "date_insert",
    "uuid",
]
COLUMNS_LISTS["dive_view"] = [
    "structure",
    "description_teaser",
    "description",
    "owner",
    "practice",
    "departure",
    "disabled_sport",
    "facilities",
    "difficulty",
    "levels",
]

```

(continues on next page)

(continued from previous page)

```
"depth",
"advice",
"themes",
"source",
"portal",
"date_update",
"date_insert",
]
COLUMNS_LISTS["touristic_content_view"] = [
    "structure",
    "description_teaser",
    "description",
    "category",
    "contact",
    "email",
    "website",
    "practical_info",
    "accessibility",
    "label_accessibility",
    "type1",
    "type2",
    "source",
    "reservation_system",
    "reservation_id",
    "date_update",
    "date_insert",
    "uuid",
    "eid",
    "provider"
]
COLUMNS_LISTS["touristic_event_view"] = [
    "structure",
    "themes",
    "description_teaser",
    "description",
    "meeting_point",
    "start_time",
    "end_time",
    "duration",
    "begin_date",
    "contact",
    "email",
    "website",
    "end_date",
    "organizer",
    "speaker",
    "type",
    "accessibility",
    "capacity",
    "portal",
    "source",
    "practical_info",
```

(continues on next page)

(continued from previous page)

```

"target_audience",
"booking",
"date_update",
"date_insert",
"uuid",
"eid",
"provider",
"bookable",
"cancelled",
"cancellation_reason"
"place",
'preparation_duration',
'intervention_duration',
]
COLUMNS_LISTS["feedback_view"] = [
    "email",
    "comment",
    "activity",
    "category",
    "problem_magnitude",
    "status",
    "related_trek",
    "uuid",
    "eid",
    "external_eid",
    "locked",
    "origin",
    "date_update",
    "date_insert",
    "created_in_suricate",
    "last_updated_in_suricate",
    "assigned_user",
    "uses_timers"
]
COLUMNS_LISTS["sensitivity_view"] = [
    "structure",
    "species",
    "published",
    "publication_date",
    "contact",
    "pretty_period",
    "category",
    "pretty_practices",
    "description",
    "date_update",
    "date_insert",
]
COLUMNS_LISTS["outdoor_site_view"] = [
    "structure",
    "name",
    "practice",
    "description",
]

```

(continues on next page)

(continued from previous page)

```
"description_teaser",
"ambiance",
"advice",
"accessibility",
"period",
"labels",
"themes",
"portal",
"source",
"information_desks",
"web_links",
"eid",
"orientation",
"wind",
"ratings",
"managers",
"type",
"description",
"description_teaser",
"ambiance",
"period",
"orientation",
"wind",
"labels",
"themes",
"portal",
"source",
"managers",
"min_elevation",
"date_insert",
"date_update",
"uuid",
]
COLUMNS_LISTS["outdoor_course_view"] = [
    "structure",
    "name",
    "parent_sites",
    "description",
    "advice",
    "equipment",
    "accessibility",
    "eid",
    "height",
    "ratings",
    "gear",
    "duration",
    "ratings_description",
    "type",
    "points_reference",
    "uuid",
]
COLUMNS_LISTS["path_export"] = [
```

(continues on next page)

(continued from previous page)

```

"structure",
"valid",
"visible",
"name",
"comments",
"departure",
"arrival",
"comfort",
"source",
"stake",
"usages",
"networks",
"date_insert",
"date_update",
"length_2d",
"length",
"ascent",
"descent",
"min_elevation",
"max_elevation",
"slope",
"uuid",
]
COLUMNS_LISTS["trail_export"] = [
    "structure",
    "name",
    "comments",
    "departure",
    "arrival",
    "category",
    "certifications",
    "date_insert",
    "date_update",
    "cities",
    "districts",
    "areas",
    "length",
    "ascent",
    "descent",
    "min_elevation",
    "max_elevation",
    "slope",
    "uuid",
]
COLUMNS_LISTS["landedge_export"] = [
    "eid",
    "land_type",
    "owner",
    "agreement",
    "date_insert",
    "date_update",
    "cities",
]

```

(continues on next page)

(continued from previous page)

```
"districts",
"areas",
"length",
"length_2d",
"ascent",
"descent",
"min_elevation",
"max_elevation",
"slope",
"uuid",
]
COLUMNS_LISTS["physicaledge_export"] = [
    "eid",
    "physical_type",
    "date_insert",
    "date_update",
    "cities",
    "districts",
    "areas",
    "length",
    "length_2d",
    "ascent",
    "descent",
    "min_elevation",
    "max_elevation",
    "slope",
    "uuid",
]
COLUMNS_LISTS["competenceedge_export"] = [
    "eid",
    "organization",
    "date_insert",
    "date_update",
    "cities",
    "districts",
    "areas",
    "length",
    "length_2d",
    "ascent",
    "descent",
    "min_elevation",
    "max_elevation",
    "slope",
    "uuid",
]
COLUMNS_LISTS["signagemanagementedge_export"] = [
    "eid",
    "organization",
    "date_insert",
    "date_update",
    "cities",
    "districts",
```

(continues on next page)

(continued from previous page)

```

"areas",
"length",
"length_2d",
"ascent",
"descent",
"min_elevation",
"max_elevation",
"slope",
"uuid",
]
COLUMNS_LISTS["workmanagementedge_export"] = [
    "eid",
    "organization",
    "date_insert",
    "date_update",
    "cities",
    "districts",
    "areas",
    "length",
    "length_2d",
    "ascent",
    "descent",
    "min_elevation",
    "max_elevation",
    "slope",
    "uuid",
]
COLUMNS_LISTS["infrastructure_export"] = [
    "name",
    "type",
    "condition",
    "access",
    "description",
    "accessibility",
    "implantation_year",
    "published",
    "publication_date",
    "structure",
    "date_insert",
    "date_update",
    "cities",
    "districts",
    "areas",
    "ascent",
    "descent",
    "min_elevation",
    "max_elevation",
    "slope",
    "usage_difficulty",
    "maintenance_difficulty",
    "uuid",
    "eid",
]

```

(continues on next page)

(continued from previous page)

```
"provider"
]
COLUMNS_LISTS["signage_export"] = [
    "structure",
    "name",
    "code",
    "type",
    "condition",
    "description",
    "implantation_year",
    "published",
    "date_insert",
    "date_update",
    "cities",
    "districts",
    "areas",
    "lat_value",
    "lng_value",
    "printed_elevation",
    "sealing",
    "access",
    "manager",
    "length",
    "ascent",
    "descent",
    "min_elevation",
    "max_elevation",
    "uuid",
    "eid",
    "provider"
]
COLUMNS_LISTS["intervention_export"] = [
    "name",
    "date",
    "type",
    "target",
    "status",
    "stake",
    "disorders",
    "total_manday",
    "project",
    "subcontracting",
    "width",
    "height",
    "length",
    "area",
    "structure",
    "description",
    "date_insert",
    "date_update",
    "material_cost",
    "heliport_cost",
]
```

(continues on next page)

(continued from previous page)

```

"subcontract_cost",
"total_cost_mandays",
"total_cost",
"cities",
"districts",
"areas",
"length",
"ascent",
"descent",
"min_elevation",
"max_elevation",
"slope",
]
COLUMNS_LISTS["project_export"] = [
"structure",
"name",
"period",
"type",
"domain",
"constraint",
"global_cost",
"interventions",
"interventions_total_cost",
"comments",
"contractors",
"project_owner",
"project_manager",
"founders",
"date_insert",
"date_update",
"cities",
"districts",
"areas",
]
COLUMNS_LISTS["trek_export"] = [
"eid",
"eid2",
"structure",
"name",
"departure",
"arrival",
"duration",
"duration_pretty",
"description",
"description_teaser",
"gear",
"networks",
"advice",
"ambiance",
"difficulty",
"information_desks",
"themes",
]

```

(continues on next page)

(continued from previous page)

```
"practice",
"accessibilities",
"accessibility_advice",
"accessibility_covering",
"accessibility_exposure",
"accessibility_level",
"accessibility_signage",
"accessibility_slope",
"accessibility_width",
"ratings_description",
"ratings",
"access",
"route",
"public_transport",
"advised_parking",
"web_links",
"labels",
"accessibility_infrastructure",
"parking_location",
"points_reference",
"related",
"children",
"parents",
"pois",
"review",
"published",
"publication_date",
"date_insert",
"date_update",
"cities",
"districts",
"areas",
"source",
"portal",
"length_2d",
"length",
"ascent",
"descent",
"min_elevation",
"max_elevation",
"slope",
"uuid",
"provider"
]
COLUMNS_LISTS["poi_export"] = [
    "structure",
    "eid",
    "name",
    "type",
    "description",
    "treks",
    "review",
```

(continues on next page)

(continued from previous page)

```

"published",
"publication_date",
"structure",
"date_insert",
"date_update",
"cities",
"districts",
"areas",
"length",
"ascent",
"descent",
"min_elevation",
"max_elevation",
"slope",
"uuid",
]
COLUMNS_LISTS["service_export"] = [
    "eid",
    "type",
    "length",
    "ascent",
    "descent",
    "min_elevation",
    "max_elevation",
    "slope",
    "uuid",
]
COLUMNS_LISTS["dive_export"] = [
    "eid",
    "structure",
    "name",
    "departure",
    "description",
    "description_teaser",
    "advice",
    "difficulty",
    "levels",
    "themes",
    "practice",
    "disabled_sport",
    "published",
    "publication_date",
    "date_insert",
    "date_update",
    "areas",
    "source",
    "portal",
    "review",
    "uuid",
]
COLUMNS_LISTS["touristic_content_export"] = [
    "structure",

```

(continues on next page)

(continued from previous page)

```
"eid",
"name",
"category",
"type1",
"type2",
"description_teaser",
"description",
"themes",
"contact",
"email",
"website",
"practical_info",
"accessibility",
"label_accessibility",
"review",
"published",
"publication_date",
"source",
"portal",
"date_insert",
"date_update",
"cities",
"districts",
"areas",
"approved",
"uuid",
"provider"
]
COLUMNS_LISTS["touristic_event_export"] = [
"structure",
"eid",
"name",
"type",
"description_teaser",
"description",
"themes",
"begin_date",
"end_date",
"duration",
"meeting_point",
"start_time",
"end_time",
"contact",
"email",
"website",
"organizer",
"speaker",
"accessibility",
"capacity",
"booking",
"target_audience",
"practical_info",
```

(continues on next page)

(continued from previous page)

```

"date_insert",
"date_update",
"source",
"portal",
"review",
"published",
"publication_date",
"cities",
"districts",
"areas",
"approved",
"uuid",
"provider",
"bookable",
"cancelled",
"cancellation_reason"
"place",
'preparation_duration',
'intervention_duration'
]
COLUMNS_LISTS["feedback_export"] = [
"comment",
"activity",
"category",
"problem_magnitude",
"status",
"related_trek",
"uuid",
"eid",
"external_eid",
"locked",
"origin",
"date_update",
"date_insert",
"created_in_suricate",
"last_updated_in_suricate",
"assigned_user",
"uses_timers"
]
COLUMNS_LISTS["sensitivity_export"] = [
"species",
"published",
"description",
"contact",
"pretty_period",
"pretty_practices",
]
COLUMNS_LISTS["outdoor_site_export"] = [
"structure",
"name",
"practice",
"description",
]

```

(continues on next page)

(continued from previous page)

```
"description_teaser",
"ambiance",
"advice",
"accessibility",
"period",
"labels",
"themes",
"portal",
"source",
"information_desks",
"web_links",
"eid",
"orientation",
"wind",
"ratings",
"managers",
"type",
"description",
"description_teaser",
"ambiance",
"period",
"orientation",
"wind",
"labels",
"themes",
"portal",
"source",
"managers",
"min_elevation",
"date_insert",
"date_update",
"uuid",
]
COLUMNS_LISTS["outdoor_course_export"] = [
    "structure",
    "name",
    "parent_sites",
    "description",
    "advice",
    "equipment",
    "accessibility",
    "eid",
    "height",
    "ratings",
    "gear",
    "duration",
    "ratings_description",
    "type",
    "points_reference",
    "uuid",
]
```

Hideable form fields

An exhaustive list of form fields hideable in each module.

```
HIDDEN_FORM_FIELDS["path"] = [
    "departure",
    "name",
    "stake",
    "comfort",
    "arrival",
    "comments",
    "source",
    "networks",
    "usages",
    "valid",
    "draft",
    "reverse_geom",
],
HIDDEN_FORM_FIELDS["trek"] = [
    "structure",
    "name",
    "review",
    "published",
    "labels",
    "departure",
    "arrival",
    "duration",
    "difficulty",
    "gear",
    "route",
    "ambiance",
    "access",
    "description_teaser",
    "description",
    "points_reference",
    "accessibility_infrastructure",
    "advised_parking",
    "parking_location",
    "public_transport",
    "advice",
    "themes",
    "networks",
    "practice",
    "accessibilities",
    "accessibility_advice",
    "accessibility_covering",
    "accessibility_exposure",
    "accessibility_level",
    "accessibility_signage",
    "accessibility_slope",
    "accessibility_width",
    "web_links",
    "information_desks",
    "source",
    "portal",
]
```

(continues on next page)

(continued from previous page)

```
"children_trek",
"eid",
"eid2",
"ratings",
"ratings_description",
"reservation_system",
"reservation_id",
"pois_excluded",
"hidden_ordered_children",
],
HIDDEN_FORM_FIELDS["trail"] = [
    "departure",
    "arrival",
    "comments",
    "category",
],
HIDDEN_FORM_FIELDS["landedge"] = [
    "owner",
    "agreement"
],
HIDDEN_FORM_FIELDS["infrastructure"] = [
    "condition",
    "access",
    "description",
    "accessibility",
    "published",
    "implantation_year",
    "usage_difficulty",
    "maintenance_difficulty"
],
HIDDEN_FORM_FIELDS["signage"] = [
    "condition",
    "description",
    "published",
    "implantation_year",
    "code",
    "printed_elevation",
    "manager",
    "sealing",
    "access"
],
HIDDEN_FORM_FIELDS["intervention"] = [
    "disorders",
    "description",
    "type",
    "subcontracting",
    "length",
    "width",
    "height",
    "stake",
    "project",
    "material_cost",
]
```

(continues on next page)

(continued from previous page)

```

    "heliport_cost",
    "subcontract_cost",
],
HIDDEN_FORM_FIELDS["project"] = [
    "type",
    "type",
    "domain",
    "end_year",
    "constraint",
    "global_cost",
    "comments",
    "project_owner",
    "project_manager",
    "contractors",
],
HIDDEN_FORM_FIELDS["site"] = [
    "parent",
    "review",
    "published",
    "practice",
    "description_teaser",
    "description",
    "ambiance",
    "advice",
    "period",
    "orientation",
    "wind",
    "labels",
    "themes",
    "information_desks",
    "web_links",
    "portal",
    "source",
    "managers",
    "eid"
],
HIDDEN_FORM_FIELDS["course"] = [
    "review",
    "published",
    "description",
    "advice",
    "equipment",
    "accessibility",
    "height",
    "children_course",
    "eid",
    "gear",
    "duration",
    "ratings_description",
]
HIDDEN_FORM_FIELDS["poi"] = [
    "review",
]

```

(continues on next page)

(continued from previous page)

```
"published",
"description",
"eid",
],
HIDDEN_FORM_FIELDS["service"] = [
    "eid",
],
HIDDEN_FORM_FIELDS["dive"] = [
    "review",
    "published",
    "practice",
    "advice",
    "description_teaser",
    "description",
    "difficulty",
    "levels",
    "themes",
    "owner",
    "depth",
    "facilities",
    "departure",
    "disabled_sport",
    "source",
    "portal",
    "eid",
],
HIDDEN_FORM_FIELDS["touristic_content"] = [
    'label_accessibility',
    'type1',
    'type2',
    'review',
    'published',
    'accessibility',
    'description_teaser',
    'description',
    'themes',
    'contact',
    'email',
    'website',
    'practical_info',
    'approved',
    'source',
    'portal',
    'eid',
    'reservation_system',
    'reservation_id'
],
HIDDEN_FORM_FIELDS["touristic_event"] = [
    'review',
    'published',
    'description_teaser',
    'description',
]
```

(continues on next page)

(continued from previous page)

```

'themes',
'end_date',
'duration',
'meeting_point',
'start_time',
'end_time',
'contact',
'email',
'website',
'organizer',
'speaker',
'type',
'accessibility',
'capacity',
'booking',
'target_audience',
'practical_info',
'approved',
'source',
'portal',
'eid',
"bookable",
'cancelled',
'cancellation_reason',
'place',
'preparation_duration',
'intervention_duration'
],
HIDDEN_FORM_FIELDS["report"] = [
    "email",
    "comment",
    "activity",
    "category",
    "problem_magnitude",
    "related_trek",
    "status",
    "locked",
    "uid",
    "origin",
    "assigned_user",
    "uses_timers"
],
HIDDEN_FORM_FIELDS["sensitivity_species"] = [
    "contact",
    "published",
    "description",
],
HIDDEN_FORM_FIELDS["sensitivity_regulatory"] = [
    "contact",
    "published",
    "description",
    "pictogram",
]

```

(continues on next page)

(continued from previous page)

```

    "elevation",
    "url",
    "period01",
    "period02",
    "period03",
    "period04",
    "period05",
    "period06",
    "period07",
    "period08",
    "period09",
    "period10",
    "period11",
    "period12",
],
HIDDEN_FORM_FIELDS["blade"] = [
    "condition",
    "color",
],
HIDDEN_FORM_FIELDS["report"] = [
    "comment",
    "activity",
    "category",
    "problem_magnitude",
    "related_trek",
    "status",
    "locked",
    "uid",
    "origin"
]
]

```

Other settings

`SEND_REPORT_ACK = True`

If false, no mail will be sent to the sender of any feedback on Geotrek-rando website

`USE_BOOKLET_PDF = True`

Use booklet for PDF. During the synchro, pois details will be removed, and the pages will be merged. It is possible to customize the pdf, with `trek_public_booklet_pdf.html`.

`ALLOW_PATH_DELETION_TOPOLOGY = True`

If false, it forbid to delete a path when at least one topology is linked to this path.

`ALERT_DRAFT = False`

If True, it sends a message to managers (MANAGERS) whenever a path has been changed to draft.

Email configuration takes place in `/opt/geotrek-admin/var/conf/custom.py`, where you control recipients emails (ADMINS, MANAGERS) and email server configuration.

```
ALERT_REVIEW = False
```

If True, it sends a message to managers (MANAGERS) whenever an object which can be published has been changed to review mode.

Email configuration takes place in `/opt/geotrek-admin/var/conf/custom.py`, where you control recipients emails (ADMINS, MANAGERS) and email server configuration.

Custom SQL :: Put your custom SQL in a file name `/opt/geotrek-admin/var/conf/extr_sql/<app name>/<pre or post>_<script name>.sql`

- app name is the name of the Django application, eg. trekking or tourism
- `pre_...` scripts are executed before Django migrations and `post_...` scripts after
- script are executed in INSTALLED_APPS order, then by alphabetical order of script names

Manage Cache :: * You can purge application cache with command or in admin interface

::

```
sudo geotrek clearcache --cache_name default --cache_name fat --cache_name api_v2h ori
```

CHAPTER
EIGHTEEN

MAINTENANCE

18.1 Application backup

Database

```
sudo -u postgres pg_dump --no-acl --no-owner -Fc geotrekdb > `date +%Y%m%d%H%M`-database.  
↪backup
```

Media files

```
tar -zcvf `date +%Y%m%d%H%M`-media.tar.gz /opt/geotrek-admin/var/media/
```

Configuration

```
tar -zcvf `date +%Y%m%d%H%M`-conf.tar.gz /opt/geotrek-admin/var/conf/
```

18.2 Application restore

If you restore Geotrek-admin on a new server, you will have to install PostgreSQL and PostGIS and create a database user first. Otherwise go directly to the database creation step.

Example for Ubuntu 18:

```
sudo apt install postgresql-10 postgresql-10-postgis-2.5  
sudo -u postgres psql -c "CREATE USER geotrek PASSWORD 'geotrek';"
```

Create an empty database (geotrekdb in this example):

```
sudo -u postgres psql -c "CREATE DATABASE geotrekdb OWNER geotrek ENCODING 'UTF8'  
↪TEMPLATE template0;"  
sudo -u postgres psql -d geotrekdb -c "CREATE EXTENSION postgis;"  
sudo -u postgres psql -d geotrekdb -c "CREATE EXTENSION postgis_raster;"  
sudo -u postgres psql -d geotrekdb -c "CREATE EXTENSION pgcrypto;"
```

Restore backup:

```
sudo -u postgres pg_restore -d geotrekdb 20200510-geotrekdb.backup
```

If errors occurs on restore, try to add --clean option.

If errors persists, rename your database and recreate a fresh one, then restore.

Extract media and configuration files:

```
tar -zvxf 20200510-media.tar.gz  
tar -zvxf 20200510-conf.tar.gz
```

Follow *Fresh installation* method. Choose to manage database by yourself.

18.3 PostgreSQL optimization

- Increase `shared_buffers` and `work_mem` according to your RAM
- Log long queries
- Use `pg activity` for monitoring

18.4 Access your database securely on your local machine (QGIS)

Instead of opening your database to the world (by opening the 5432 port for example), you can use SSH tunnels.

18.5 Major evolutions from version 2.33

From version 2.33, Geotrek-admin is packaged in a debian package. This mean several things :

- a system user `geotrek` is created on install ;
- base code is located in `/opt/geotrek-admin` folder ;
- `geotrek` is the new command, replacing `bin/django`, and must be run in root (system user `geotrek` is used after) ;
- there is no more `settings.ini` but an `env` file with environment variables ;
- configuration files (`custom.py` et `env`), parsers and all customisation files (templates and translations) are now located in `/opt/geotrek-admin/var/conf` ;
- we advise you to configure data synchronization in `/opt/geotrek-admin/var`

SYNCHRONIZATION

19.1 Manual synchronization

To create data for Geotrek-rando (public web portal) and Geotrek-mobile (mobile phone app), just run this command:

```
sudo geotrek sync_rando /opt/geotrek-admin/var/data
```

The parameter is the destination directory for synchronized data. If you choose another directory, make sure the parent of this directory is writable by geotrek user. Otherwise you will get a PermissionError message.

If Geotrek-admin is not accessible on localhost:80, you have to use the --url option. To make output less or more verbose, you can use the --verbose option.

Since version 2.4.0 of Geotrek-admin, you can also launch the command sync_rando from the web interface. You can add synchronization options with advanced configuration setting SYNC_RANDO_OPTIONS = {}.

For example, if you add this line in /opt/geotrek-admin/var/conf/custom.py you will skip generation of map tiles files during the synchronisation : SYNC_RANDO_OPTIONS = {'skip_tiles': True}

19.2 Automatic synchronization

You can set up automatic synchronization by creating a file /etc/cron.d/geotrek_sync that contains:

```
0 3 * * * root /usr/sbin/geotrek sync_rando /opt/geotrek-admin/var/data
```

This example will automatically synchronize data at 3 am every day.

Note: it is required to give the full path to the geotrek command since cron set the PATH only to bin:/usr/bin.

19.3 Synchronization options

```
Options:  
-v VERBOSITY, --verbosity=VERBOSITY  
          Verbosity level; 0=minimal output, 1=normal output,  
          2=verbose output  
-u URL, --url=URL      Base URL of Geotrek-admin (eg. http://geotrek.myorganization.com)  
-r URL, --rando-url=URL  
          Base URL of public Geotrek-rando website, used for static html  
          ↵versions of objects pages
```

(continues on next page)

(continued from previous page)

```

generated for Facebook in meta folder of data API
-s SOURCE, --source=SOURCE
    Filter by source(s)
-P PORTAL, --portal=PORTAL
    Filter by portal(s)
-p, --skip-pdf      Skip generation of PDF files
-t, --skip-tiles   Skip generation of map tiles files for Geotrek-mobile app v2
-d, --skip-dem     Skip generation of Digital Elevation Model files for 3D view
-e, --skip-profile-png
    Skip generation of PNG elevation profile
-w, --with-touristicevents
    Include touristic events by trek in global.zip for Geotrek-
`mobile v2
-c CONTENT_CATEGORIES, --with-touristiccontent-categories=CONTENT_CATEGORIES
    Include touristic contents by trek in global.zip for Geotrek-
`mobile v2
    (filtered by category ID ex: --with-touristiccontent-categories=
`"1,2,3")
-g, --with-signages  Include published signages
-i, --with-infrastructures
    Include published infrastructures

```

Geotrek-mobile v3 uses its own synchronization command (see below). If you are not using Geotrek-mobile v2 anymore, it is recommended to use -t option to don't generate big offline tiles directories, not used elsewhere than in Geotrek-mobile v2. Same for -w and -c option, only used for Geotrek-mobile v2.

19.4 Synchronization filtered by source and portal

You can filter treks, touristic contents, touristic events and static pages by source(s). For example, if you created 3 sources records named source A, source B and source C and you want to only export data from source A and source B to your web public portal, you can synchronize with:

```
sudo geotrek sync_rando --source "source A,source B" dataAB
```

Multiple sources are separated with commas (without space before or after comma). Do not forget to add double quotes after and before the parameter if there are spaces in source names. You can run several commands to export several sources combinations into several directories and use them to publish several distinct web portals.

You can do exactly the same with Target_Portal field value. It will include objects associated to the selected portal + those without portal.

```
sudo geotrek sync_rando --portal "portal A" dataA
```

19.5 Synchronization filtered by touristic content categories

In Geotrek-mobile v2, you can choose to also include touristic content per trek. You must specify ID categories :

```
sudo geotrek sync_rando --with-touristiccontent-categories="1,3"
```

Multiple categories are separated with commas (without space before or after coma).

19.6 Synchronization with a distant Geotrek-rando server

If your server hosts both Geotrek-admin and Geotrek-rando, you just have to configure Geotrek-rando so it uses the directory chosen above. Be sure NGINX or Apache will have access rights to read these data.

If you have separated servers, you have to copy files, for example with rsync command:

```
rsync /path/of/generated/data other-server:/path/of/generated/data
```

19.7 Geotrek-mobile app v3

The Geotrek-mobile app v3 has its own API and synchronization command called sync_mobile.

It has similar parameters as sync_rando:

```
sudo geotrek sync_mobile [-h] [--languages LANGUAGES] [--portal PORTAL]
                           [--skip-tiles] [--url URL] [--indent INDENT]
                           [--version] [-v {0,1,2,3}] [--settings SETTINGS]
                           [--pythonpath PYTHONPATH] [--traceback]
                           [--no-color] [--force-color]
                           path
```


IMPORT DATA

20.1 Import paths

Danger: With dynamic segmentation, importing paths is very risky if paths are already present in the same area in Geotrek, it is only safe for an area where no path is already created.

Indeed, if you import paths where there are existing paths, treks, POIs or trails linked topology might be impacted.

Before import paths layer, it is important to prepare them. Paths must be:

- valid geometry
- simple geometry (no intersection)
- all intersections must cut the paths
- not double or covering others

We use QGis to clean a path layer, with plugin Grass. Here are the operations:

- check the SRID (must be the same as in Geotrek)
- vectors → geometric tools → “collect geometries”
- vectors → geometric tools → “group”
- **clean geometries**
 - search “v_clean” in “Processing toolbox”
 - select following options in cleaning tool: break, snap, duplicate (ou rmdup), rmline, rmdangle, chdangle, bpoly, prune
 - in threshold enter 2,2,2,2,2,2,2 (2 meters for each option)
- **delete duplicate geometries**
 - search “duplicate” in “Processing toolbox”
- **regroup lines**
 - search “v.build.polyline” in “Processing toolbox”
 - select “first” in “Category number mode”

There are two ways to import path : importing your shapefile with command line, or via QGis following this blog post.

To import a shapefile containing your paths, use the command `loadpaths`:

```
sudo geotrek loadpaths {Troncons.shp} \
--srid=2154 --comments-attribute IT_VTT IT_EQ IT_PEDEST \
--encoding latin9 -i
```

20.2 Import data from touristic data systems (SIT)

20.2.1 Configure APIDAE (ex-SITRA) import

To import touristic content from APIDAE (ex-SITRA), edit /opt/geotrek-admin/var/conf/parsers.py file with the following content:

```
from geotrek.tourism.parsers import TouristicContentApidaeParser

class HebergementParser(TouristicContentApidaeParser):
    label = "Hébergements"
    api_key = 'xxxxxxxx'
    project_id = 9999
    selection_id = 99999
    category = "Hébergement"
    type1 = ["Camping"]
    type2 = ["3 étoiles", "Tourisme et Handicap"] # just remove this line if no type2
```

Then set up appropriate values:

- `label` at your convenience,
- `api_key`, `project_id` and `selection_id` according to your APIDAE (ex-SITRA) configuration
- `category`, `type1` and `type2` (optional) to select in which Geotrek category/type imported objects should go
- You can add `delete = True` in your class if you want to delete objects in Geotrek databases that has been deleted in your Apidae selection. It will only delete objects that match with your class settings (category, types, portal, provider...)
- You can also use the class `HebergementParser` if you only import accomodations
- See <https://github.com/GeotrekCE/Geotrek-admin/blob/master/geotrek/tourism/parsers.py> for details about Parsers

You can duplicate the class. Each class must have a different name. Don't forget the u character before strings if they contain non-ascii characters.

To apply changes, you may have to run `sudo service geotrek restart`.

20.2.2 Import Treks from APIDAE

A parser implementation is available to import Treks from APIDAE. Use it by defining a subclass of `geotrek.trekking.parsers.ApidaeTrekParser` in your var/conf/parsers.py configuration file as shown above.

You'll have to configure how to access your APIDAE data: `api_key`, `project_id` and `selection_id` (those are setting attributes from the APIDAE base parser).

The `practices_mapped_with_activities_ids` and `practices_mapped_with_default_activities_ids` attributes define default mapping with the trekking module data fixture. You may override this to match your own types of Trek Practice.

20.2.3 Import from LEI

To import touristic content or touristic event from LEI , create (or update) /opt/geotrek-admin/var/conf/parsers.py file with the following content:

```
from geotrek.tourism.parsers import LEITouristicContentParser, LEITouristicEventParser

class XXXLEIContentParser(LEITouristicContentParser):
    label = "LEI TouristicContent"
    url = "https://url.asp"

class XXXLEIEventParser(LEITouristicEventParser):
    label = "LEI TouristicEvent"
    url = "https://url.asp"
```

20.2.4 Configure Marque Esprit Parc import

To import touristic content from Esprit Parc national database, create (or update) /opt/geotrek-admin/var/conf/parsers.py file with the following content:

```
from geotrek.tourism.parsers import EspritParcParser

class XXXEspritParcParser(EspritParcParser):
    label = "Marque Esprit Parc"
    url = "https://gestion.espritparcnational.com/ws/?f=getProduitsSelonParc&codeParc=XXX"
    ↵"
```

Then set up appropriate values:

- XXX by unique national park code (ex: PNE)

You can duplicate the class. Each class must have a different name. Don't forget the u character before strings if they contain non-ascii characters.

In this case categories and types in Geotrek database have to be the same as in Esprit parc database. Otherwise missing categories and types will be created in Geotrek database.

Imported contents will be automatically published and approved.

If you use an url that filters a unique category, you can change its name. Example to get only Honey products and set the Geotrek category and type in which import them:

```
class MielEspritParcParser(EspritParcParser):
    label = "Miel Esprit Parc national"
    url = "https://gestion.espritparcnational.com/ws/?f=getProduitsSelonParc&
    ↵codeParc=XXX&typologie=API"
    constant_fields = {
        'category': "GeotrekCategoryName",
        'published': True,
        'approved': True,
        'deleted': False,
    }
    m2m_constant_fields = {
        'type1': "GeotrekTypeName",
    }
```

URL to get Esprit parc types: <https://gestion.espritparcnational.com/ws/?f=getTypologieProduits>.

20.2.5 Sensitive areas import

When sensitive areas module is enabled, Geotrek provides 3 parsers to import data:

- Import sensitive areas from <http://biodiv-sports.fr> (`geotrek.sensitivity.parsers.BiodivParser`). By default this parser imports all sensitive areas in configured spatial extent.
- Import species sensitive areas from a ziped shapefile. Imported field names are: `espece` (required), `contact` and `descriptio`. Species with corresponding names have to be created manually before import.
- Import regulatory sensitive areas from a ziped shapefile. Imported field names are: `nom` (required), `contact`, `descriptio`, `periode` (month numbers separated with comas), `pratiques` (separated with comas), and `url`. Practices with corresponding names have to be created manually before import.

You can start imports from “Import” menu or from command line. You can override them in your `var/conf/parsers.py` file.

20.2.6 Multiple imports

When you need to import data for the same object found in 2 different parsers, you can to force the aggregation of both values in many to many relationship case. It can be interesting with portals for example.

Param for the aggregation : `m2m_aggregate_fields`

Here is an example with 2 parsers :

```
class Portal_1Parser(XXXParser):
    portal = "portal_1"

class AggregateParser(XXXParser):
    portal = "portal_2"
    m2m_aggregate_fields = ["portal"]
```

Then, when you import the first parser `Portal_1Parser`, you get multiple objects with `portal_1` as portal. If any object of the `Portal_1Parser` is also in `AggregateParser`, fields in `m2m_aggregate_fields` will have their values not be replaced but aggregated. Then your object in both portals will have as portal: `portal_1, portal_2`

- Here in this example whenever you import the first parser `Portal_1Parser`, portals are replaced because `m2m_aggregate_fields` is not filled. Then, be careful to import parsers in the right order or add the param `m2m_aggregate_fields` on all parsers.

If you need to cancel the aggregation of portals, remove param `m2m_aggregate_fields`.

20.2.7 Importing from multiple sources with deletion

When importing data for the same model using two (or more) different sources, the `provider` field should be used to differentiate between sources, allowing to enable object deletion with `delete = True` without causing the last parser to delete objects created by preceeding parsers.

In the following example, `Provider_1Parser` and `Provider_2Parser` will each import their objects, set the `provider` field on these objects, and only delete objects that disappeared from their respective source since last parsing.

```

class Provider_1Parser(XXXParser):
    delete = True
    provider = "provider_1"

class Provider_2Parser(XXXParser):
    delete = True
    provider = "provider_2"

```

Danger: It is recommended to use provider from the first import - Do not add a provider field to preexisting parsers that already imported objects, or you will have to manually set the same value for provider on all objects already created by this parser.

Danger: If a parser does not have a provider value, it will not take providers into account, meaning that it could delete objects from preceding parsers even if these other parsers do have a provider themselves.

The following example would cause NoProviderParser to delete objects from Provider_2Parser and Provider_1Parser.

```

class Provider_1Parser(XXXParser):
    delete = True
    provider = "provider_1"

class Provider_2Parser(XXXParser):
    delete = True
    provider = "provider_2"

class NoProviderParser(XXXParser):
    delete = True
    provider = None      (default)

```

20.2.8 Generic settings for your parser

This settings may be overriden when you define a new parser:

- label parser display name (default: None)
- model import content with this model (default: None)
- filename file imported if no url (default: None)
- url flow url imported from if no filename (default: None)
- simplify_tolerance (default: 0) # meters
- update_only don't create new contents (default: False)
- delete (default: False)
- duplicate_eid_allowed if True, allows different contents with same eid (default: False)
- fill_empty_translated_fields if True, fills empty translated fields with same value (default: False)
- warn_on_missing_fields (default: False)

- `warn_on_missing_objects` (default: `False`)
- `separator` (default: `'+'`)
- `eid` field name for eid (default: `None`)
- `provider` (default: `None`)
- `fields` (default: `None`)
- `m2m_fields` (default: `{}`)
- `constant_fields` (default: `{}`)
- `m2m_constant_fields` (default: `{}`)
- `m2m_aggregate_fields` (default: `[]`)
- `non_fields` (default: `{}`)
- `natural_keys` (default: `{}`)
- `field_options` (default: `{}`)
- `default_language` use another default language for this parser (default: `None`)

20.2.9 Start import from command line

Just run:

```
sudo geotrek import HebergementParser
```

Change `HebergementParser` to match one of the class names in `var/conf/parsers.py` file. You can add `-v2` parameter to make the command more verbose (show progress). Thank to cron utility you can configure automatic imports.

20.2.10 Start import from Geotrek-admin UI

Open the top right menu and clic on `imports`.

20.3 Import data from a remote Geotrek instance

Importing from a Geotrek instance works the same way as from SIT. A usecase for this is to aggregate data from several Geotrek-admin instance.

Danger: Importing data from a remote Geotrek instance does not work with dynamic segmentation, your instance where you import data must have dynamic segmentation disabled.

For example, to import treks from another instance, edit `/opt/geotrek-admin/var/conf/parsers.py` file with the following content:

```
class DemoGeotrekTrekParser(BaseGeotrekTrekParser):  
    url = "https://remote-geotrek-admin.net" # replace url with remote instance url  
    delete = False  
    field_options = {
```

(continues on next page)

(continued from previous page)

```
'difficulty': {'create': True, },
'route': {'create': True, },
'themes': {'create': True},
'practice': {'create': True},
'accessibilities': {'create': True},
'networks': {'create': True},
'geom': {'required': True},
'labels': {'create': True},
}
```

Then run in command line

```
sudo geotrek import DemoGeotrekTrekParser
```

Treks are now imported into your own instance.

20.4 Import other datas from a file

You can add parsers in your custom *parsers.py* file (*/opt/geotrek-admin/var/conf/parsers.py*) which will allow you to import data from files directly in your admin (superusers only). For example, some parsers are not available by default but you can use them adding some lines in your parsers file :

```
from geotrek.trekking.parsers import TrekParser # only without dynamic segmentation
    ↪(`TREKKING_TOPOLOGY_ENABLED` = False)
from geotrek.trekking.parsers import POIParser
```

You can also use some of Geotrek commands to import data from a vector file handled by GDAL (<https://gdal.org/drivers/vector/index.htm>) (e.g.: ESRI Shapefile, GeoJSON, GeoPackage etc.)

Possible data are e.g.: POI, infrastructures, signages, cities, districts, restricted areas, dives, paths.

You must use these commands to import spatial data because of the dynamic segmentation, which will not be computed if you enter the data manually.

Here are the Geotrek commands available to import data from file:

- loaddem
- loadpoi
- loaddive
- loadinfrastructure
- loadsignage
- loadcities
- loaddistricts
- loadrestrictedareas

Usually, these commands come with ability to match file attributes to model fields.

To get help about a command:

```
sudo geotrek help <subcommand>
```

20.4.1 Import DEM (altimetry)

```
sudo geotrek help loaddem
```

```
usage: manage.py loaddem [-h] [--replace] [--update-altimetry] [--version] [-v {0,1,2,3}]
                           [--settings SETTINGS] [--pythonpath PYTHONPATH] [--traceback] [--no-color] [--force-color]
                           [--skip-checks]
                           dem_path

Load DEM data (projecting and clipping it if necessary). You may need to create a GDAL Virtual Raster if your DEM is composed of several files.

positional arguments:
  dem_path

optional arguments:
  -h, --help            show this help message and exit
  --replace             Replace existing DEM if any.
  --update-altimetry   Update altimetry of all 3D geometries, /!\ This option takes lot of time to perform
  --version             show program's version number and exit
  -v {0,1,2,3}, --verbosity {0,1,2,3}
                        Verbosity level; 0=minimal output, 1=normal output, 2=verbose, 3=very verbose output
  --settings SETTINGS  The Python path to a settings module, e.g. "myproject.settings.main". If this isn't provided, the DJANGO_SETTINGS_MODULE environment variable will be used.
  --pythonpath PYTHONPATH
                        A directory to add to the Python path, e.g. "/home/djangoprojects/myproject".
  --traceback           Raise on CommandError exceptions
  --no-color            Don't colorize the command output.
  --force-color         Force colorization of the command output.
  --skip-checks         Skip system checks.
```

20.4.2 Import POIs

```
sudo geotrek help loadpoi
```

```
usage: manage.py loadpoi [-h] [--encoding ENCODING] [--name-field NAME_FIELD] [--type-field TYPE_FIELD] [--description-field DESCRIPTION_FIELD]
                           [--name-default NAME_DEFAULT] [--type-default TYPE_DEFAULT] [--version] [-v {0,1,2,3}]
                           [--settings SETTINGS] [--pythonpath PYTHONPATH] [--traceback] [--no-color] [--force-color] [--skip-checks]
                           point_layer

Load a layer with point geometries in a model
```

positional arguments:

- point_layer

(continues on next page)

(continued from previous page)

```

optional arguments:
  -h, --help            show this help message and exit
  --encoding ENCODING, -e ENCODING
                        File encoding, default utf-8
  --name-field NAME_FIELD, -n NAME_FIELD
                        Name of the field that contains the name attribute. Required or
  ↵use --name-default instead.
  --type-field TYPE_FIELD, -t TYPE_FIELD
                        Name of the field that contains the POI Type attribute. Required or
  ↵use --type-default instead.
  --description-field DESCRIPTION_FIELD, -d DESCRIPTION_FIELD
                        Name of the field that contains the description of the POI
  ↵(optional)
  --name-default NAME_DEFAULT
                        Default value for POI name. Use only if --name-field is not set
  --type-default TYPE_DEFAULT
                        Default value for POI Type. Use only if --type-field is not set
  --version
                        show program's version number and exit
  -v {0,1,2,3}, --verbosity {0,1,2,3}
                        Verbosity level; 0=minimal output, 1=normal output, 2=verbose
  ↵output, 3=very verbose output
  --settings SETTINGS  The Python path to a settings module, e.g. "myproject.settings.
  ↵main". If this isn't provided, the DJANGO_SETTINGS_MODULE environment variable will
                        be used.
  --pythonpath PYTHONPATH
                        A directory to add to the Python path, e.g. "/home/
  ↵djangoprojects/myproject".
  --traceback
                        Raise on CommandError exceptions
  --no-color
                        Don't colorize the command output.
  --force-color
                        Force colorization of the command output.
  --skip-checks
                        Skip system checks.

```

20.4.3 Import Infrastructure

`sudo geotrek help loadinfrastructure`

```

usage: manage.py loadinfrastructure [-h] [--use-structure] [--encoding ENCODING] [--name-
  ↵field NAME_FIELD] [--type-field TYPE_FIELD] [--category-field CATEGORY_FIELD]
                                         [--condition-field CONDITION_FIELD] [--structure-
  ↵field STRUCTURE_FIELD] [--description-field DESCRIPTION_FIELD] [--year-field YEAR_
  ↵FIELD]
                                         [--type-default TYPE_DEFAULT] [--category-default_
  ↵CATEGORY_DEFAULT] [--name-default NAME_DEFAULT] [--condition-default CONDITION_DEFAULT]
                                         [--structure-default STRUCTURE_DEFAULT] [--
  ↵description-default DESCRIPTION_DEFAULT] [--eid-field EID_FIELD] [--year-default YEAR_
  ↵DEFAULT]
                                         [--version] [-v {0,1,2,3}] [--settings SETTINGS] [--
  ↵pythonpath PYTHONPATH] [--traceback] [--no-color] [--force-color] [--skip-checks]
                                         point_layer

```

Load a layer **with** point geometries **in** te structure model

(continues on next page)

(continued from previous page)

```

positional arguments:
  point_layer

optional arguments:
  -h, --help            show this help message and exit
  --use-structure       Allow to use structure for condition and type of infrastructures
  --encoding ENCODING, -e ENCODING
                        File encoding, default utf-8
  --name-field NAME_FIELD, -n NAME_FIELD
                        Base url
  --type-field TYPE_FIELD, -t TYPE_FIELD
                        Base url
  --category-field CATEGORY_FIELD, -i CATEGORY_FIELD
                        Base url
  --condition-field CONDITION_FIELD, -c CONDITION_FIELD
                        Base url
  --structure-field STRUCTURE_FIELD, -s STRUCTURE_FIELD
                        Base url
  --description-field DESCRIPTION_FIELD, -d DESCRIPTION_FIELD
                        Base url
  --year-field YEAR_FIELD, -y YEAR_FIELD
                        Base url
  --type-default TYPE_DEFAULT
                        Default type of infrastructure, it will create the type if it ↵
  ↵doesn't exist
  --category-default CATEGORY_DEFAULT
                        Category by default for all infrastructures, B by default
  --name-default NAME_DEFAULT
                        Base url
  --condition-default CONDITION_DEFAULT
                        Default Condition for all infrastructures, it will create the ↵
  ↵condition if it doesn't exist
  --structure-default STRUCTURE_DEFAULT
                        Default Structure for all infrastructures
  --description-default DESCRIPTION_DEFAULT
                        Default description for all infrastructures
  --eid-field EID_FIELD
                        External ID field
  --year-default YEAR_DEFAULT
                        Default year for all infrastructures
  --version             show program's version number and exit
  -v {0,1,2,3}, --verbosity {0,1,2,3}
                        Verbosity level; 0=minimal output, 1=normal output, 2=verbose ↵
  ↵output, 3=very verbose output
  --settings SETTINGS  The Python path to a settings module, e.g. "myproject.settings.
  ↵main". If this isn't provided, the DJANGO_SETTINGS_MODULE environment variable will be ↵
  ↵used.
  --pythonpath PYTHONPATH
                        A directory to add to the Python path, e.g. "/home/
  ↵djangoprojects/myproject".
  --traceback          Raise on CommandError exceptions

```

(continues on next page)

(continued from previous page)

--no-color	Don't colorize the command output.
--force-color	Force colorization of the command output.
--skip-checks	Skip system checks.

20.4.4 Import Dive

```
sudo geotrek help loaddive
```

```
usage: manage.py loaddive [-h] [--encoding ENCODING] [--name-field NAME_FIELD] [--depth-
field DEPTH_FIELD] [--practice-default PRACTICE_DEFAULT]
                           [--structure-default STRUCTURE_DEFAULT] [--eid-field EID-
FIELD] [--version] [-v {0,1,2,3}] [--settings SETTINGS] [--pythonpath PYTHONPATH] [--
traceback]
                           [--no-color] [--force-color] [--skip-checks]
                           point_layer

Load a layer with point geometries in the Dive model

positional arguments:
  point_layer

optional arguments:
  -h, --help            show this help message and exit
  --encoding ENCODING, -e ENCODING
                        File encoding, default utf-8
  --name-field NAME_FIELD, -n NAME_FIELD
  --depth-field DEPTH_FIELD, -d DEPTH_FIELD
  --practice-default PRACTICE_DEFAULT
  --structure-default STRUCTURE_DEFAULT
  --eid-field EID_FIELD
                        External ID field
  --version             show program's version number and exit
  -v {0,1,2,3}, --verbosity {0,1,2,3}
                        Verbosity level; 0=minimal output, 1=normal output, 2=verbose_
                        output, 3=very verbose output
  --settings SETTINGS   The Python path to a settings module, e.g. "myproject.settings.
main". If this isn't provided, the DJANGO_SETTINGS_MODULE environment variable will be_
used.
  --pythonpath PYTHONPATH
                        A directory to add to the Python path, e.g. "/home/
djangoproject".
  --traceback           Raise on CommandError exceptions
  --no-color            Don't colorize the command output.
  --force-color          Force colorization of the command output.
  --skip-checks         Skip system checks.
```

20.4.5 Import Signage

```
sudo geotrek help loadsignage
```

```
usage: manage.py loadsignage [-h] [--use-structure] [--encoding ENCODING] [--name-field_
    NAME_FIELD] [--type-field TYPE_FIELD] [--condition-field CONDITION_FIELD]
    [--structure-field STRUCTURE_FIELD] [--description-field_
    DESCRIPTION_FIELD] [--year-field YEAR_FIELD] [--code-field CODE_FIELD]
    [--type-default TYPE_DEFAULT] [--name-default NAME_DEFAULT]_
    [--condition-default CONDITION_DEFAULT] [--structure-default STRUCTURE_DEFAULT]
    [--description-default DESCRIPTION_DEFAULT] [--eid-field_
    EID_FIELD] [--year-default YEAR_DEFAULT] [--code-default CODE_DEFAULT] [--version]
    [-v {0,1,2,3}] [--settings SETTINGS] [--pythonpath_
    PYTHONPATH] [--traceback] [--no-color] [--force-color] [--skip-checks]
    point_layer
```

Load a layer **with** point geometries **in** te structure model

positional arguments:

- point_layer

optional arguments:

- h, --help show this help message **and** exit
- use-structure Allow to use structure **for** condition **and** type of infrastructures
- encoding ENCODING, -e ENCODING File encoding, default utf-8
- name-field NAME_FIELD, -n NAME_FIELD Name of the field that will be mapped to the Name field **in**
- Geotrek
- type-field TYPE_FIELD, -t TYPE_FIELD Name of the field that will be mapped to the Type field **in**
- Geotrek
- condition-field CONDITION_FIELD, -c CONDITION_FIELD Name of the field that will be mapped to the Condition field **in**
- Geotrek
- structure-field STRUCTURE_FIELD, -s STRUCTURE_FIELD Name of the field that will be mapped to the Structure field **in**
- Geotrek
- description-field DESCRIPTION_FIELD, -d DESCRIPTION_FIELD Name of the field that will be mapped to the Description field **in**
- in** Geotrek
- year-field YEAR_FIELD, -y YEAR_FIELD Name of the field that will be mapped to the Year field **in**
- Geotrek
- code-field CODE_FIELD Name of the field that will be mapped to the Code field **in**
- Geotrek
- type-default TYPE_DEFAULT Default value **for** Type field
- name-default NAME_DEFAULT Default value **for** Name field
- condition-default CONDITION_DEFAULT Default value **for** Condition field

(continues on next page)

(continued from previous page)

```
--structure-default STRUCTURE_DEFAULT
    Default value for Structure field
--description-default DESCRIPTION_DEFAULT
    Default value for Description field
--eid-field EID_FIELD
    External ID field
--year-default YEAR_DEFAULT
    Default value for Year field
--code-default CODE_DEFAULT
    Default value for Code field
--version
    show program's version number and exit
-v {0,1,2,3}, --verbosity {0,1,2,3}
    Verbosity level; 0=minimal output, 1=normal output, 2=verbose,
    ↵output, 3=very verbose output
--settings SETTINGS  The Python path to a settings module, e.g. "myproject.settings",
    ↵main". If this isn't provided, the DJANGO_SETTINGS_MODULE environment variable will be
    ↵used.
--pythonpath PYTHONPATH
    A directory to add to the Python path, e.g. "/home/
    ↵djangoprojects/myproject".
--traceback
    Raise on CommandError exceptions
--no-color
    Don't colorize the command output.
--force-color
    Force colorization of the command output.
--skip-checks
    Skip system checks.
```

20.4.6 Import Cities

sudo geotrek help loadcities

```
usage: manage.py loadcities [-h] [--code-attribute CODE] [--name-attribute NAME] [--encoding ENCODING] [--srid SRID] [--intersect] [--version] [-v {0,1,2,3}] [--settings SETTINGS]
                            [--pythonpath PYTHONPATH] [--traceback] [--no-color] [--force-color] [--skip-checks]
                            file_path

Load Cities from a file within the spatial extent

positional arguments:
  file_path            File's path of the cities

optional arguments:
  -h, --help           show this help message and exit
  --code-attribute CODE, -c CODE
                      Name of the code's attribute inside the file
  --name-attribute NAME, -n NAME
                      Name of the name's attribute inside the file
  --encoding ENCODING, -e ENCODING
                      File encoding, default utf-8
  --srid SRID, -s SRID
                      File's SRID
  --intersect, -i      Check features intersect spatial extent and not only within
```

(continues on next page)

(continued from previous page)

```
--version           show program's version number and exit
-v {0,1,2,3}, --verbosity {0,1,2,3}
                    Verbosity level; 0=minimal output, 1=normal output, 2=verbose,
                    3=very verbose output
--settings SETTINGS  The Python path to a settings module, e.g. "myproject.settings.
                     main". If this isn't provided, the DJANGO_SETTINGS_MODULE environment variable will be
                     used.
--pythonpath PYTHONPATH
                    A directory to add to the Python path, e.g. "/home/
                     djangoprojects/myproject".
--traceback        Raise on CommandError exceptions
--no-color         Don't colorize the command output.
--force-color      Force colorization of the command output.
--skip-checks     Skip system checks.
```

20.4.7 Import Districts

sudo geotrek help loaddistricts

```
usage: manage.py loaddistricts [-h] [--name-attribute NAME] [--encoding ENCODING] [--srid SRID] [--intersect] [--version] [-v {0,1,2,3}] [--settings SETTINGS] [--pythonpath PYTHONPATH] [--traceback] [--no-color] [--force-color] [--skip-checks] file_path

Load Districts from a file within the spatial extent

positional arguments:
  file_path            File's path of the districts

optional arguments:
  -h, --help           show this help message and exit
  --name-attribute NAME, -n NAME
                      Name of the name's attribute inside the file
  --encoding ENCODING, -e ENCODING
                      File encoding, default utf-8
  --srid SRID, -s SRID File's SRID
  --intersect, -i      Check features intersect spatial extent and not only within
  --version            show program's version number and exit
  -v {0,1,2,3}, --verbosity {0,1,2,3}
                    Verbosity level; 0=minimal output, 1=normal output, 2=verbose,
                    3=very verbose output
  --settings SETTINGS  The Python path to a settings module, e.g. "myproject.settings.
                     main". If this isn't provided, the DJANGO_SETTINGS_MODULE environment variable will be
                     used.
  --pythonpath PYTHONPATH
                    A directory to add to the Python path, e.g. "/home/
                     djangoprojects/myproject".
  --traceback        Raise on CommandError exceptions
  --no-color         Don't colorize the command output.
  --force-color      Force colorization of the command output.
```

(continues on next page)

(continued from previous page)

--skip-checks	Skip system checks.
---------------	---------------------

20.4.8 Import Restricted areas

sudo geotrek help loadrestrictedareas

```
usage: manage.py loadrestrictedareas [-h] [--name-attribute NAME] [--encoding ENCODING]
                                     [--srdf SRID] [--intersect] [--version] [-v {0,1,2,3}] [--settings SETTINGS]
                                     [--pythonpath PYTHONPATH] [--traceback] [--no-
                                     color] [--force-color] [--skip-checks]
                                     file_path area_type

Load Restricted Area from a file within the spatial extent

positional arguments:
  file_path            File's path of the restricted area
  area_type           Type of restricted areas in the file

optional arguments:
  -h, --help          show this help message and exit
  --name-attribute NAME, -n NAME
                      Name of the name's attribute inside the file
  --encoding ENCODING, -e ENCODING
                      File encoding, default utf-8
  --srdf SRID, -s SRID File's SRID
  --intersect, -i     Check features intersect spatial extent and not only within
  --version           show program's version number and exit
  -v {0,1,2,3}, --verbosity {0,1,2,3}
                      Verbosity level; 0=minimal output, 1=normal output, 2=verbose
  --output, 3=very verbose output
  --settings SETTINGS The Python path to a settings module, e.g. "myproject.settings.
  --main". If this isn't provided, the DJANGO_SETTINGS_MODULE environment variable will be
  --used.
  --pythonpath PYTHONPATH
                      A directory to add to the Python path, e.g. "/home/
  --djangoprojects/myproject".
  --traceback         Raise on CommandError exceptions
  --no-color          Don't colorize the command output.
  --force-color       Force colorization of the command output.
  --skip-checks      Skip system checks.
```

20.5 Exploitation commands

20.5.1 Delete attachment from disk

When an attachment (eg. pictures) is removed, its file is not automatically removed from disk. You have to run `sudo geotrek clean_attachments` manually or in a cron to remove old files. After that, you should run `sudo geotrek thumbnail_cleanup` to remove old thumbnails.

20.5.2 Remove duplicate paths

Duplicate paths can appear while adding paths with commands or directly in the application. Duplicate paths can cause some problems of routing for topologies, it can generate corrupted topologies (that become MultiLineStrings instead of LineStrings).

You have to run `sudo geotrek remove_duplicate_paths`

During the process of the command, every topology on a duplicate path will be set on the original path, and the duplicate path will be deleted.

20.5.3 Unset structure on categories

Use this command if you wish to undo linking categories to structures for some models.

You have to run `sudo geotrek unset_structure`

```
usage: manage.py unset_structure [-h] [--all] [--list] [--version] [-v {0,1,2,3}] [--settings SETTINGS] [--pythonpath PYTHONPATH] [--traceback] [--no-color] [--force-color] [--skip-checks] [model [model ...]]
```

Unset structure **in** lists of choices **and** group choices **with** the same name.

positional arguments:

 model List of choices to manage

optional arguments:

```
-h, --help                  show this help message and exit
--all                        Manage all models
--list                      Show available models to manage
--version                   show program's version number and exit
-v {0,1,2,3}, --verbosity {0,1,2,3}
                            Verbosity level; 0=minimal output, 1=normal output, 2=verbose
--output, 3=very verbose output
--settings SETTINGS      The Python path to a settings module, e.g. "myproject.settings".
--main". If this isn't provided, the DJANGO_SETTINGS_MODULE environment variable will be used.
--pythonpath PYTHONPATH
                            A directory to add to the Python path, e.g. "/home/
--djangoprojects/myproject".
--traceback               Raise on CommandError exceptions
--no-color                Don't colorize the command output.
--force-color             Force colorization of the command output.
--skip-checks             Skip system checks.
```

Danger: You can't chose for each choice which set of category you want to unset structures, it will happen for all categories

Firstly, if a category is linked to a structure, it creates the same category but with no structure associated. Secondly, every element with this old category gets assigned to this new category. Finally all old categories are removed.

20.5.4 Reorder topologies

All topologies have information about which path they go through on and in which order. Actually, when a path is split in 2 by another path, a new path is added to the database. We need to add information for all topologies that need to go through this new path. This is badly managed at the moment, especially for the order of passage of the paths. `sudo geotrek reorder_topologies`

It removes a lot of useless information which can accelerate the process of editing topologies afterward.

During the process of this command, it tries to find a good order of passage on the paths which creates only one LineString from start to end. It stays as close as possible to the corrupted order. This command uses the same algorithm to generate one LineString when the order is not well managed during topologies' display.

Danger: It can happens that this algorithm can't find any solution and will genereate a MultiLineString. This will be displayed at the end of the reorder

20.5.5 Automatic commands

You can set up automatic commands by creating a `cron` file under `/etc/cron.d/geotrek_command` that contains:

```
0 3 * * * root /usr/sbin/geotrek <command> <options>
```

example :

```
0 4 * * * root /usr/sbin/geotrek reorder_topologies
```

This example will automatically reorder topologies at 4 am every day.

CHAPTER
TWENTYONE

DOCKER

Docker is an alternative installation method, recommended for experts only. It allows to install several instances of Geotrek-admin on the same serveur, and to install it on other distributions than Ubuntu Linux 18.04.

21.1 Installation

1. Install Docker and Docker Compose, either from your distribution or from upstream packages (cf. <https://docs.docker.com/install/>)
2. Download the code from <https://github.com/GeotrekCE/Geotrek-admin/releases> or checkout it with git from <https://github.com/GeotrekCE/Geotrek-admin>/
3. Unzip the tarball
4. Copy `docker-compose-prod.yml` to `docker-compose.yml` and edit to feed your needs if necessary
5. Copy `.env-prod.dist` to `.env` and edit to feed your needs if necessary
6. Create user and database, enable PostGIS extension
7. Run `docker-compose run --rm web update.sh`
8. Run `docker-compose up`
9. Install NGINX (or equivalent) and add a configuration file (taking inspiration from `nginx.conf.in`)

21.2 Management commands

Replace `sudo geotrek ...` commands by `cd <install directory>; docker-compose run --rm web ./manage.py ...`

To load minimal data and create an application superuser, run :

```
docker-compose run --rm web load_data.sh
docker-compose run --rm web ./manage.py createsuperuser
```

CHAPTER
TWENTYTWO

SENSITIVITY

22.1 Enabling

Sensitivity module is disabled by default. To enable it, add the following code in the custom settings file:

```
# Enable sensitivity module
INSTALLED_APPS += ('geotrek.sensitivity', )
```

22.2 Settings

The following settings are related to sensitive areas:

```
# Default radius of sensitivity bubbles when not specified for species
SENSITIVITY_DEFAULT_RADIUS = 100 # meters

# Buffer around treks to intersects sensitive areas
SENSITIVE_AREA_INTERSECTION_MARGIN = 500 # meters
```

22.3 Import from <https://biodiv-sports.fr>

In user interface, in the top-right menu, clic on “Imports” and choose “Biodiv’Sports”.

On command line, run

```
sudo geotrek import geotrek.sensitivity.parsers.BiodivParser
```

22.4 Import from shapefile

In user interface, in the top-right menu, go to Imports and choose “Shapefile zone sensible espèce” or “Shapefile zone sensible réglementaire”.

On command line, run:

```
sudo geotrek import geotrek.sensitivity.parsers.SpeciesSensitiveAreaShapeParser <file.
˓→shp>
```

or:

```
sudo geotrek import geotrek.sensitivity.parsers.RegulatorySensitiveAreaShapeParser
  ↪<file.shp>.
```

Attributes for “zones sensibles espèce” are:

- espece : species name. Mandatory. A species with this name must have been previously created.
- contact : contact (text or HTML format). Optional.
- descriptio : description (text or HTML format). Optional.

Attributes for “zones sensibles réglementaires” are:

- name: zone name.
- contact : contact (text or HTML format). Optional.
- descriptio : description (text or HTML format). Optional.
- periode : month numbers of zone occupation, separated by comas, without spaces (ex. « 6,7,8 » for june, july and august)
- pratiques : sport practices names, separated by comas, without spaces (ex. « Terrestre,Aérien »). A sport practice with this name must have been previously created.
- url : card url. Optional.

22.5 Sync to Geotrek-rando

Just run:

```
sudo geotrek sync_rando <parameters>
```

as usual. If sensitivity module is enabled, sensitive areas will be automatically synced.

CHAPTER
TWENTYTHREE

CONTRIBUTING

23.1 Conventions

- Before contributing, open an issue and discuss about it with community (is it a bug or a feature ? What is the best way to achieve my goal ?)
- Use flake8
- KISS & DRY as much as possible
- Elegant and generic is good, simple is better
- Separate bug fixes and new features in several pull requests.
- Open a new Pull Request in “Draft” status until tests passed. Use at least ‘bug’, ‘improvement’ or ‘feature’ label.
- Commits messages are explicit and mention issue number ((ref #12) or (fixes #23))
- Features are developed in a branch and merged from Github pull-requests.

23.2 Definition of done

- `docs/changelog.rst` is up-to-date
- An explicit unit-test covers the bugfix or the new feature.
- A frontend test (`:path:jstests/nav-*.js`) covers the navigation bug fix or feature
- A JS *Mocha* test (`:path:jstests/tests.*.js`) covers the JavaScript bug fix or feature
- Unit-tests total coverage is above or at least equal with previous commits. Patch coverage is 100% on new lines.
- Settings have default value in `settings/base.py`
- Installation instructions and documentation are up-to-date

Check TODO in the source tree:

```
find geotrek | xargs egrep -n -i '(TODO|XXX|temporary|FIXME)'
```

23.3 Release

On master branch:

- If need be, merge `translations` branch managed with <https://weblate.makina-corpus.net>
- Update files `VERSION`, `docs/conf.py` and `docs/changelog.rst` to remove `+dev` suffix and increment version (please use semver rules)
- Run `dch -r -D RELEASED`, update version in the same way and save
- Commit with message ‘Release x.y.z’ to merge in `master` branch before release
- Add git tag X.Y.Z
- Update files `VERSION`, `docs/conf.py` and `docs/changelog.rst` to add `+dev` suffix
- Run `dch -v <version>+dev --no-force-save-on-release` and save
- Commit with message ‘Back to development’
- Push branch and tag
- Add release on Github (copy-paste `doc/changelog.rst` paragraph)
- When creating a new release ‘x.y.z’ on github, Github actions will generate the `.deb` package file, and publish it on <https://packages.geotrek.fr> (see `.circleci/config.yml` file for details)

DEVELOPMENT

24.1 Quickstart

```
cp .env-dev.dist .env
# Edit .env if need be
cp docker-compose-dev.yml docker-compose.yml
docker-compose build
docker-compose run --rm web update.sh
docker-compose run --rm web load_data.sh
docker-compose run --rm web ./manage.py createsuperuser
docker-compose up -d
```

Go to <http://geotrek.localhost:8000>

PDF generation might not work unless you use this domain and is correctly set to SERVER_NAME variable in your .env file.

24.2 Install git hooks

- Several git hooks are available to prevent pushing to master branch or launch quality tests before committing. Install them with following commands:

```
ln -s -f ../../.githooks/pre-push .git/hooks/pre-push
ln -s -f ../../.githooks/pre-commit .git/hooks/pre-commit
```

24.3 Adding or upgrade dependencies

Consider using pip-tools to manage dependencies.

- add your dependency in setup.py for general dependency, dev-requirements.in for dev dependency, then run :

```
docker-compose run --rm web pip-compile
docker-compose run --rm web pip-compile dev-requirements.in
```

or

```
make deps
```

24.4 Model modification

```
docker-compose run --rm web ./manage.py makemigrations <appName>
docker-compose run --rm web ./manage.py migrate
```

Note: Add migration file to source control.

24.4.1 Definition of Done for new model fields

When updating or adding a new field `my_field` to a model `MyModel`, please proceed with the following changes to ensure this field is included in existing functionalities.

In `MyModel` class :

- If `my_field` is a `ForeignKey`:
 - make sure to override `related_name` with an explicit set name
 - if `my_field` causes cascading deletion (argument `on_delete=models.CASCADE`), make sure to log potential deletions (see example `log_cascade_deletion_from_sector_practice` in `geotrek/outdoor/models.py`)
- Make sure to set `verbose_name` on the field and add proper translations in `.po` files

Outside of model class :

- To display `my_field` in detail views, add a row in template `mymodel_detail_attributes.html`
- Look for form class `MyModelForm(CommonForm)` :
 - If it exists, and field needs to be included in form, add `my_field` to form attributes (`fields` on the `Meta` class, sometimes `fieldslayout` as well).
 - If field is added to the form **and is optional**, please add `my_field` to the documentation for hideable form fields : in `docs/advanced-configuration.rst` look for `HIDDEN_FORM_FIELDS['mymodel']` and add your field to the list.
- Look for list view class `MyModelList(CustomColumnsMixin, MapEntityList)` :
 - If it exists, please add `my_field` to the documentation for custom list view columns : in `docs/advanced-configuration.rst` look for `COLUMNS_LISTS['mymodel_view']` and add your field to the list.
 - If it exists, and if you wish to display a column for `my_field` in the list view for this model by default, simply add `my_field` to `default_extra_columns` on this class.
- Look for exports view class `MyModelFormatList(MapEntityFormat, MyModelList)` :
 - If it exists, please add `my_field` to the documentation for custom list exports columns : in `docs/advanced-configuration.rst` look for `COLUMNS_LISTS['mymodel_export']` and add your field to the list.
 - If it exists, and if you wish to display a column for `my_field` in CSV/SHP exports for this model by default, simply add `my_field` to `default_extra_columns` on this class.
- Follow the documentation you just edited to test that custom columns and hideable fields do work properly with your new field.
- Look for sql file defaults `geotrek/{app_name}/sql/post_90_defaults.sql` :

- If it exists find your modelname in the list and depending on the default value alter column `my_field` or add `-- my_field`
- If the modelname doesn't exist, create a new section (even if you don't need to alter column)
- Look for sql view file `geotrek/{app_name}/sql/post_20_views.sql` and update the view for your model with an alias for the new field

In API v2 :

If `MyModel` is served by APIv2, make sure to add a serializer for the new field in `geotrek/api/v2/serializers.py` and if you wish to filter on this field, create a new filter and add it to the right `ViewSet` under `geotrek/api/v2/views`, using attribute `filter_backends`.

When updating a field `my_field` in a model `MyModel` for `new_field`, check if this field is translated in `geotrek/{app}/translation.py`.

If so, you need to add a migration just after the migration generated by django. This migration should rename the old fields generated by modeltranslation `my_field_en` by `new_field_en` (example : `geotrek/trekking/migrations/0014_auto_20200228_2127.py`)

24.5 Check quality

Flake8

run:

```
docker-compose run --rm web flake8 geotrek
```

or

```
make flake8
```

24.6 Run tests

Django tests :

ENV variable must be set to run tests:

```
docker-compose run --rm -e ENV=tests web ./manage.py test
```

Test without dynamic segmentation:

```
docker-compose run --rm -e ENV=tests_nds web ./manage.py test
```

Cypress tests :

Create an empty project with docker :

```
docker-compose down
docker-compose up -d
```

Install elements for the cypress tests

```
make load_data
make load_test_integration
make load_test_integration_workflow
```

Move in cypress folder and install

```
cd cypress
npm ci
```

Launch tests

```
./node_modules/.bin/cypress run
```

Pictures of the problem and videos are generated in cypress/videos and cypress/screenshots

24.7 Setup to run rando synchronization locally

(sync rando is only relevant for an admin paired with geotrek rando v2)

In your django settings you must set the ‘url’ key of SYNC_RANDO_OPTIONS to use the same domain as defined by SERVER_NAME in your .env.

For instance with SERVER_NAME=geotrek.localhost (default value)

```
SYNC_RANDO_OPTIONS = {
    'url': 'http://geotrek.localhost:8000'
}
```

24.8 Setup to use screamshotter-related features locally

Use the domain defined in SERVER_NAME in your .env to reach your local geotrek admin web instance. By default the address is <http://geotrek.localhost:8000>.

24.9 Database reset

Data only:

```
docker-compose run --rm web ./manage.py flush
```

24.10 Restore existing Database

Assuming a dump of your database is located in your project directory:

```
docker-compose run --rm web pg_restore --clean --no-owner --no-acl -h $POSTGRES_HOST -U
$POSTGRES_USER -d $POSTGRES_DB /opt/geotrek-admin/<path_to_backup>.dump
```

Restore your ./var/conf/ project files, and data files into ./var/media.

Then run a synchronization.

24.11 Mapentity development

TODO

24.12 UML diagrams of data model

UML diagrams of Geotrek-admin data models are available in `docs/data-model` directory. To regenerate them from PostgreSQL, install `postgresql-autodoc` and `graphviz` Ubuntu packages and run `make uml`.

24.13 Documentation

A container based on sphinx image is created using `docker-compose-dev.yml`, documentation is built in watch mode thanks to `sphinx-autobuild`.

Access to documentation built in html : <http://0.0.0.0:8800>

24.13.1 Translate documentation

- Generate .pot if needed

```
docker-compose run --rm sphinx make gettext
```

- Generate .po files

```
docker-compose run --rm sphinx sphinx-intl update -p _build/locale -l fr
```

CHAPTER
TWENTYFIVE

TRANSLATING

Geotrek-admin can be translated online on [Makina Corpus Weblate instance](#)

25.1 Getting started

- Create an account
- Browse by project
- Browse by language

25.1.1 Create an account

- Click on “Register”
- Fill the register form
- Validate your email
- Fill the password
- Then connect to weblate

[Official documentation](#) to create an account and manage your profile.

25.1.2 Browse by project

- Go to “Project > Browse all projects”
- Select Geotrek-admin project
- Click on tab “Languages”
- Choose the language to translate

S'inscrire en utilisant le courriel

Adresse courriel

Le courriel de confirmation vous y sera envoyé.

Nom d'utilisateur


Le nom d'utilisateur ne peut contenir que des lettres, des chiffres et les caractères suivants : @ , + - _

Votre nom complet

Combien font 10 + 2 ?
 ↑ ↓

S'inscrire

The screenshot shows the Weblate Makina interface. At the top, there is a navigation bar with the logo 'Weblate Makina', 'Tableau de bord', 'Projets ▾', 'Langues ▾', and 'Vérif'. The 'Projets' menu is open, displaying a list of projects: 'Geotrek-rando', 'Gérer les Projets surveillés', and 'Parcourir tous les projets'. The 'Geotrek-rando' project is currently selected.

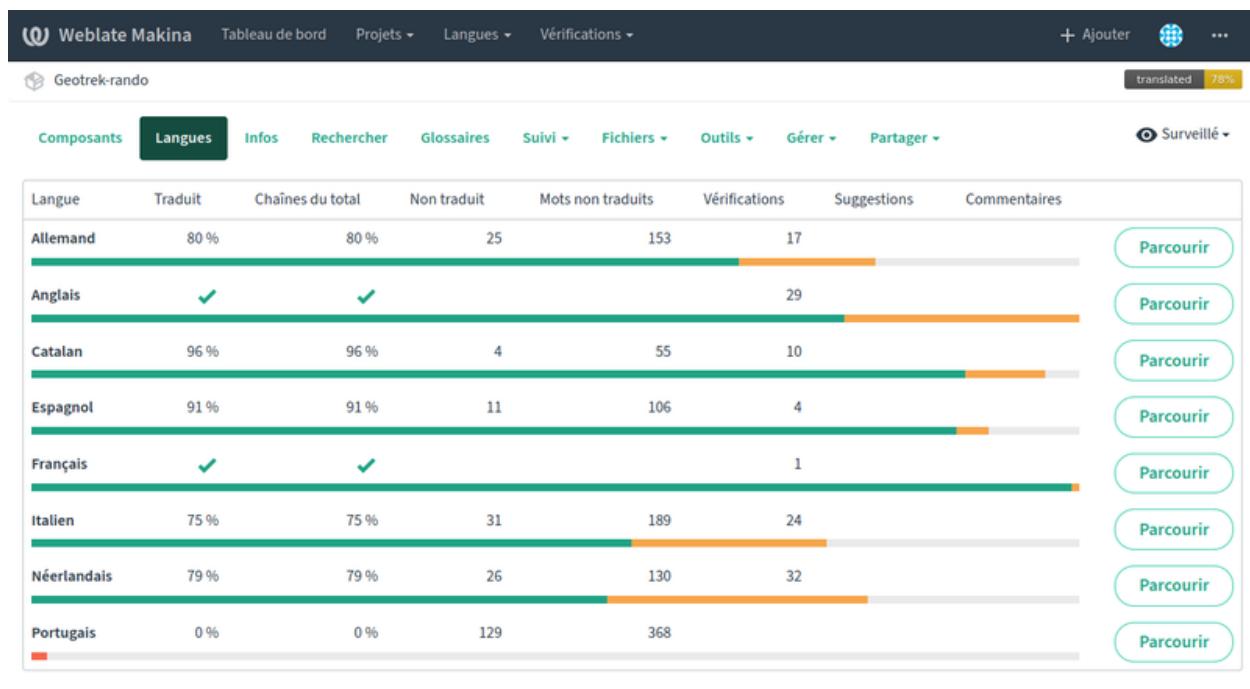

Propulsé par [Weblate 4.0.1](#) | [À propos de Weblate](#) | [Contact](#) | [Documentation](#) | [Faites un don à Weblate](#)

25.1.3 Browse by language

You could also choose language first

- Go to “Languages > Browse all languages”
- Choose the language you want to translate
- Select the project to translate

25.1.4 Select a component to translate

- Select a component (a module or a piece of documentation)
- Click on “Translate” to start translating

And let's go!

Weblate official documentation for translation.

25.2 Translation features

Weblate shows all translation by language and by module. Errors and left to translate can be displayed easily.

Weblate can identify problematic translations as chains between projects, punctuation inconsistency.

The screenshot shows the 'Points à vérifier' (Checkpoints) section of Weblate. It displays two error items:

- Incohérence [1]**: This item indicates that a chain has different translations in the project or is not translated in certain components. It includes a detailed description: "Cette chaîne a des traductions différentes dans ce projet ou n'est pas traduite dans certains composants." Below it are two buttons: "Ignorer" and "Ignorer pour toutes les langues".
- Point final [2]**: This item indicates that the source chain and its translation do not end with a period. It includes a detailed description: "La chaîne source et la traduction ne finissent pas toutes les deux par un point." Below it are two buttons: "Ignorer" and "Ignorer pour toutes les langues".

Other occurrences in all components allows to check consistency.

Each translation generate a permalink (picto).

Weblate has a “Zen mode” showing only chains to translate.

25.3 Release translations (only for github repository managers)

Weblate sends new translations to *translations* branch in Github, dedicated to translations. When new translations chains are validated, manager has to send them manually to Github.

For each release, *translations* branch must be merged into master before building the release.

25.3.1 Send modifications to Github repository

- In component, click “Manage > Repository maintenance”
- Click “Commit” to save translation in local repository
- Click “Push” to send local commits to *translations* branch in Github repository

Chaines à proximité 6 Autres occurrences 5 Commentaires Traduction automatisée Mémoire de traduction Autres langues Historique

Composant	Traduction	
Geotrek-admin/Tourism	Traduit ici par Traduit Valeur de géométrie invalide	Utiliser cette traduction
Les chaînes suivantes ont le même contexte et la même source.		
Geotrek-admin/Sensitivity	Traduit Valeur de géométrie invalide	Utiliser cette traduction
Geotrek-admin/Feedback	Traduit Géométrie invalide	Utiliser cette traduction
Écarts entre les 2 traductions (en rouge la traduction que vous pouvez imposer, en vert la traduction actuelle de la chaîne) :		
	Valeur de g éométrie invalide	
Geotrek-admin/MapEntity	Traduit Géométrie invalide	Utiliser cette traduction
Écarts entre les 2 traductions (en rouge la traduction que vous pouvez imposer, en vert la traduction actuelle de la chaîne) :		
	Valeur de g éométrie invalide	
Geotrek-admin/Common	Traduit Pointeur de géométrie invalide.	Utiliser cette traduction
Écarts entre les 2 traductions (en rouge la traduction que vous pouvez imposer, en vert la traduction actuelle de la chaîne) :		
	Val P ointeur de géométrie invalide	
Geotrek-admin/Diving	Traduit Valeur de géométrie invalide	Utiliser cette traduction

25.3.2 Add translations to next release

1. In **Github**, merge *translations* branch into *master*, and update changelog.
2. After releasing, in **Weblate**, rebase the branch :
 - In the component, click “Manage > Repository maintenance”
 - Click “Rebase” to rebase *translations* branch onto *master*

CHAPTER
TWENTYSIX


DOCUMENTATION

We use sphinx doc and sphinx-rtd-theme. Requirements are included.

To compile and test documentation on local environment, run :

```
docker-compose up -d sphinx
```


27.1 Architecture

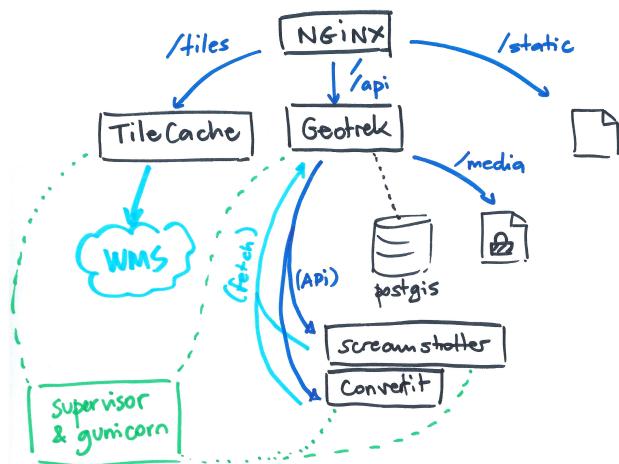

- **Geotrek-admin**, the web application
- **Convertit**, a Web API to convert document and image formats (*.odt to .doc, .svg to .png*)
- **Screamshotter**, a Web API to perform Web pages screenshots (*map image exports*).


27.2 Main components

The whole project is built on top of *mapentity*.

A generic application in charge of:

- Menus and models registry
- List/Detail/Create/Update/Delete views
- Filtering
- Map images exports
- File attachment
- Document export
- Shapefile/GPX/CSV serializers

For a Django model, we use the registry to activate all views and menus:

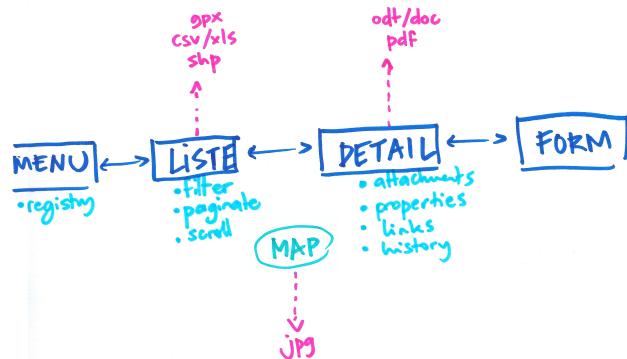

Business specific notions are implemented in Geotrek-admin respective applications:

- **common**: shared concepts between all applications (*Organism, utils, ...*)
- **authent**: groups, user, profile and structure notions. Optional external authent backend.
- **core**: elevation, paths, snapping, spatial referencing (topologies)
- **land**: static cities/districts/restricted areas layers, physical types, competence, signage and work management
- **infrastructure**: buildings, signages, equipements
- **maintenance**: interventions (on paths or on infrastructures) and projects
- **trekking**: POIs and treks

27.3 Django conventions twists

We have a couple of Django conventions infringements:

- SQL triggers everywhere: since Geotrek-admin database is to become the central storage component of all park organisation data, it has to behave consistently whether data is modified through the Web application or raw access tools (pgadmin, QGIS). (For example, insertion & update timestamps, geometry computation or DEM wrapping.)
- Safe delete: update field `deleted = True` instead of performing actual delete in table. Requires every querysets to be filtered on deleted. (**TODO**: use dango-safedelete, [issue 813](#))

27.4 Main roles of PostgreSQL triggers

Automatic computation of fields :

- Date insert/update
- Geometry computation of linear referencing (topologies)
- DEM elevation wrapping (3D length, slope, etc.)

Topological path network :

- Split paths at intersection
- Snap paths extremities

CHAPTER
TWENTYEIGHT

AUTHORS

28.1 Makina Corpus

- Gilles Bassière
- Sylvain Beorchia
- Mathieu Leplatre
- Anaïs Peyrucq
- Satya Azemar
- Simon Thépot
- Chloé Morisset
- Frédéric Bonifas
- Benjamin Marguin
- Eric Brehault
- Célian Garcia
- Gaël Utard
- Jean-Etienne Castagnede
- Timothée de Montety
- Bastien Potiron
- Emmanuelle Helly
- Célia Prat
- Paul Florence
- Marine Faucher
- Marc-Antoine Dupré

28.2 Parc national des Ecrins

- Camille Monchicourt
- Théo Lechémia
- Élie Bouttier

28.3 Others

- Michaël Viadere (OpenIG)
- Guillaume Boitel
- Jean Lenormand
- Claude Paroz
- Amandine Sahl (Parc National des Cévennes)
- Frédéric Cloitre (LPO AuRA)
- Idrissa Djepa Creutz (OepnIG / Parc National des Cévennes)
- Yannick LE DUC
- Guillaume Boitel (Parc National de Port Cros)
- Pierre Loicq (Parc National de la Vanoise)

28.4 Credits

- *Information desk* by Alex Berkowitz from The Noun Project
- *Calendar* by Laurent Patain from The Noun Project
- *Restaurant* designed by Roberto Pinto from the Noun Project
- *Kayak* designed by johanna from the Noun Project
- *Luggage* designed by Luis Prado from the Noun Project
- *Location* designed by Jacob Lowe from the Noun Project
- *Food* designed by Rémy Médard from the Noun Project
- *Climbing* designed by Eric Milet from the Noun Project
- *Box Office* designed by Alessio Damiano from the Noun Project
- *Steep Descent* designed by Sergey Patutin from the Noun Project
- *Landscape* by Adrien Coquet from the Noun Project
- *Ski course* by Sahua D from the Noun Project

CHAPTER
TWENTYNINE

CHANGELOG

29.1 2.99.0 (2023-07-18)

New features

- Add field access to Signage and Infrastructure models (#3605)
- Enable filtering lists by objects IDs on APIv2 (#3458)
- Add information desks link on Treks with AggregatorParsers
- Add filter by manager to Blades module
- Add filter “Published” to outdoor course and outdoor site (#2810)
- Add a “district” attribute to views containing the “cities” attribute in API V2 (#3632)
- Make signage blade lines text optional (#3326)
- Add path information on API V2 about departure, arrival, comfort, source, networks, usages and stake (#3262)

Improvements

- Published by language depending on each portals and languages.
- Use default value with parsers when no value is found
- Improve filter popover (#2968)
- Add a scroll bar into filter form and module list (#2849)
- In projects, start year must be before end year (#3567)

Maintenance

- Upgrade *django-mapentity*

29.2 2.98.1 (2023-05-30)

Bug fixes

- Fix: Remove user group creation in Outdoor fixture (#3524)
- Fix: Configure nginx to invalidate mobile cache on language change
- Fix: service pictograms’ URLs are made absolute in the API output of Trek descriptions (#3321)
- Fix: APIDAE Events parser now handles integer values for capacity (#3573)
- Fix: Configure *large_image* to use *libvips* even for PNG images (fixes HD Views for PNGs)

- Fix: Deleting signages must also delete their blades

Maintenance

- Upgrade *django-large-image* and *pip-tools*

Improvements

- Improve cascading deletions logic, and log them to LogEntry model to maintain history of deletions

29.3 2.98.0 (2023-03-27)

Bug fixes

- Fix: trekparser allowed to create trek with other geometry than linestrings
- Fix: do not prevent activity mappings overriding in subclasses of APIDAE Trek parser
- Fix permissions bypass structure was always needed on accessibility attachments (#3396)
- Fix default pictogram for mountainbike practice (it was blurry on mobile apps)
- Fix: *delete=True* mode now works for APIDAE Trek parser
- Fix missing insert and update date in fixtures for Sensitivity and Outdoor modules
- Fix target should not be ordonnable for interventions
- Fix: filter geometries on right geometry types in synchro mobile
- Fix: trek deletion was not possible without removing report link to this trek
- Fix: duplication attachments

Improvements

- Add arguments loadsignage : sealing / manager (#3377)
- Various minor improvements for APIDAE Trek parser
- The “near_xxx” API filters now use the topological link regarding topological objects. This will provide better performances for those endpoints when topologies are enabled. See Issues #3472 and #3505.
- Enable using Suricate workflow without moderation steps

Minor changes

- The “trek” API filter on POI and SensitiveArea list views now provide the same treatment as “near_trek” and is marked as deprecated.
- */api/v2/sensitive_area/?trek=123* now returns an empty list when trek does not exist instead of 404 - Not Found.
- */api/v2/sensitive_area/* results are no longer sorted by ID when the “trek” filter is used.
- */api/v2/sensitive_area/?trek=123* now uses the configured intersection margin for sensitive areas (previously returned intersections w/o margin).
- The “near_trek” API filter now removes from results the trek’s excluded POIs.

Performances

- Improve performance zoning filter interventions

Documentation

- Update UML diagrams in documentation

29.4 2.97.4 (2023-03-09)

Performances

- Fix interventions list loading

29.5 2.97.3 (2023-02-28)

Bug fixes

- Fix: nearby sensitive areas now appears in outdoor details pages (and the other way too) ([Issue #3494](#))
- Fix Interventions list datatable is empty

Improvements

- Set max zoom on HD Views depending on tiles depth

29.6 2.97.2 (2023-02-22)

Bug fixes

- Fix link between attachment and file is lost when updating old attachment without title and suffix

29.7 2.97.1 (2023-02-17)

Bug fixes

- Fix link between attachment and file is lost when updating old attachment without suffix

29.8 2.97.0 (2023-02-17)

New feature

- Add rules (with pictograms, descriptions and url) on regulatory sensitive areas (#3386)

Bug fixes

- Fix intervention filter when outdoor or signage is not installed
- Fix intervention's geojson
- Fix pictogram's for interventions on lands

Documentation

- Update Suricate documentation
- Add HD Views documentation

Security

- Add safety checks on uploaded files

Warning

- Attachment filenames are now suffixed with a random string. This might cause duplication of old attachment files that previously did not have a suffix. Make sure to run `clean_attachments` command regularly to save disk space.

29.9 2.96.1 (2022-02-02)

Bug fixes

- Fix APIv2 filters deteriorated performances

Improvements

- Sensitivity: Add missing attachments list to sensitive areas API

29.10 2.96.0 (2023-02-01)

DO NOT USE IT!

Warning

- APIv2 filters performances are deteriorated - Skip to 2.96.1 instead

New feature

- Handle very high resolution images (HD Views) that will automatically be tiled, for Trek, POI and Site (#3378)
- Handle annotations on HD Views (points, lines, polygons and text)

Improvements

- APIDAE Trek Parser output now shows APIDAE IDs of entities triggering warnings during import
- Update maximum request size in Nginx from 10M to 200M to allow uploading HD pictures (#3378)

Bug fixes

- Fix intervention datatable list if one intervention has no target
- Fix intervention datatable list with interventions on lands
- Fix signage's blade detail
- APIDAE Trek parser now raises an import error on geometry with not continuous segments

Development

- New contributing guide (docs/CONTRIBUTING.rst).
- Development dependencies are now split in dedicated file.
- pip-tools and flake8 are now available in developer environment.
- Dependency graph is now checked in CI (see docs/contribute/development to how add a new dependency).
- New git pre-commit hook to check all is alright before commit (see docs/contribute/development).

Warning

- The default Nginx configuration template has been improved (<https://github.com/GeotrekCE/Geotrek-admin/pull/3298/commits/f9c72d95c1fd7eee2dee26dc73a5927966a812bf>) to allow uploading big images. It is highly recommended to apply changes to your Nginx configuration template (in /opt/geotrek-admin/var/conf/nginx.conf.in).

29.11 2.95.0 (2023-01-24)

New features

- Add possibility to duplicate objects with geometries

Minor improvements

- Add blade type on signage detail view (#3325)

Warning

Bionic (Ubuntu 18.04) instances need to install deadsnakes PPA to handle python3.8 updates:

```
apt-get install software-properties-common  
add-apt-repository --yes ppa:deadsnakes/ppa  
apt-get install python3.8
```

Maintenance

In preparation for HD Views developments (PR #3298)

- Bump Python to 3.8
- Bump MapEntity to 8.4.0
- Bump Pillow to 9.3.0
- Bump Celery to 5.2.1
- Bump django-celery-results to 2.4.0
- Bump django-clearcache to 1.2.1
- Add libvips to dependencies

Improvements

- Apidae trek parser supports geometry import from kml or kmz attachment
- More checks on Apidae trek parser in order not to import trek without a geometry

Bug fixes

- Fix loaddem command update other types of geometry
- Recreate cache folders if missing. (#3384)
- Modify site's geometry before saving to avoid edition and export of shapefiles (#3399)
- Fix API V2 cache key with X-Forwarded-Proto header (#3404)
- Check pictogram exist on categories during generation of pdfs
- Prevent “Internal Error” on API v2 when wrong url parameter is provided on courses and sites filter for pois
- Fix ApidaeParsers does not update every time
- Add fixtures licenses initial install
- Fix default conf nginx for mobile
- Replace image's relative URLs with absolute URLs in API v2 trek descriptions (#3321)
- Disable scroll propagation on layers list to avoid zoom changes on map (#2687)

29.12 2.94.0 (2022-12-12)

New feature

- New LEIParser to import touristic content and event from LEI touristic data system
- New XMLParser to import content from XML
- ApidaeTrekParser: import trek's contact info into description
- New Parser subclass to import POIs from the APIDAE touristic data system.
- New POIParser to import POIs from files (with and without dynamic segmentation)
- Change default color of imported filelayer (#306)

Bug fixes

- Fix shp zipfile import
- ApidaeTrekParser: round computed duration
- ApidaeTrekParser: fix attached pictures import

29.13 2.93.0 (2022-12-06)

New feature

- New Parser subclass to import treks from the APIDAE touristic data system.

Improvements

- Use MapEntity widget for geometries even without setting TREKKING_TOPOLOGY_ENABLED (to always display file layer leaflet plugin)

29.14 2.92.3 (2022-12-02)

Improvements

- API v2: - revert ?trek filter by direct intersecting geometry on sensitive area endpoint. - improve ?near_xxx filters by direct intersecting buffered geometry on sensitive area endpoint.

29.15 2.92.2 (2022-12-01)

Bug fixes

- Fix cache management in API v2

29.16 2.92.1 (2022-12-01)

Improvements

- Show direction on lines with setting DIRECTION_ON_LINES_ENABLED in signage detail
- Add mobile nginx configuration directly on Geotrek-admin

Bug fixes

- Fix display lines on signage with setting DIRECTION_ON_LINES_ENABLED
- Show required's style for lines in blade form
- Fix cache management in API v2

29.17 2.92.0 (2022-11-29)

Warning

!!!! Clear cache after update. You can do this by going to admin panel, “clearcache” section, then delete default / fat and api_v2 !!!!

Improvements

- Cache API v2 Detail endpoints and themes list endpoint
- Sensitive areas are now computed with buffered geometries with settings SENSITIVE_AREA_INTERSECTION_MARGIN. Use ST_INTERSECTS on it is faster.
- Zoning informations are now cached until instance or zoning is updated.
- Show more decimal for coordinates in signage sql view

New feature

- Separate application and API v2 cache, ability to purge them with command or via admin

Bug fixes

- Check geom is valid before save
- Fix old migration script of Topology.geom (actually causes Django to falsely detect model changes not yet with a migration in NDS mode)
- Check that the Spatial Reference Identifier (SRID) unit is in meters before launching application (was during migration)
- Fix filter_type1 and filter_type2 for EspritParcParser when val is a list
- Fix “‘NoneType’ object is not iterable” when responseData is null for EspritParcParser

Documentation

- Fix parameter name MAIL_MANAGERS in documentation

29.18 2.91.1 (2022-11-18)

Bug fixes

- Fix flatpages can't be saved

29.19 2.91.0 (2022-11-17)

Minor improvements

- Add paths in overlays for elements which are not topologies

Bug fixes

- Add missing file field in Imports form layout
- Add missing help texts and validators on TouristicEvent intervention_duration and preparation_duration
- Fix flatpages can't be saved

29.20 2.90.1 (2022-11-04)

Bug fixes

- Prevent providers from APIv2 from overriding local providers when using GeotrekParser
- Add missing sources parsing to GeotrekParser (for Trek, Touristic Content, Touristic Event)

29.21 2.90.0 (2022-11-03)

New features

- Add new command to reorder pathaggregations of topologies

Bug fixes

- Fix APIv2 does not return sources related to published sites

29.22 2.89.1 (2022-10-20)

Bug fixes

- Prevent migration 0033_auto_20220929_0840 from failing by escaping Touristic Events participant_number
- Fix signage details page with DIRECTION_ON_LINES enabled (hide "Direction" column header)

29.23 2.89.0 (2022-10-20)

DO NOT USE IT!

Warning

- Migrations for Touristic Events can fail depending on data for `participant_number` - Skip to 2.89.1 instead

New features

- Add fields `preparation_duration`, `intervention_duration` to `TouristicEvents`
- Add new setting `DIRECTION_ON_LINES_ENABLED` to have the `direction` field on lines instead of blades
- Partially handle translated fields: when setting `fill_empty_translated_fields` to True, all empty translation fields for all languages will be set with the parsed value

Bug fixes

- Blade list view now takes into account custom columns from `COLUMNS_LISTS` setting
- Fix Suricate Workflow : do not unlock reports when resolving them
- Fix Suricate Workflow : display clickable links in report related emails

29.24 2.88.0 (2022-10-11)

DO NOT USE IT!

Warning

- Migrations for Touristic Events can fail depending on data for `participant_number` - Skip to 2.89.1 instead

New features

- Add optional places to `TouristicEvents`, using place selector to locate `TouristicEvent` on form map (#3266)
- Add fields `end_time`, `cancelled`, `cancellation_reason`, `bookable` and `place` to `TouristicEvents` (#3237)
- `cancellation_reason` selector is displayed in Event form if `bookable` is checked (#3237)
- `booking` text box is displayed in Event form if `bookable` is checked (#3237)
- Create `Assessment` tab in Event form to input retrospective information such as number of attendees per category (#3237)
- Create `TouristicEventParticipantCategory` model to define types of attendees for Events (#3237)

Breaking changes

- Rename `meeting_time` to `start_time` for `TouristicEvent`. APIv2 serialisation for `TouristicEvent` now exposes `start_time` instead of `meeting_time` (#3237)
- Rename `participant_number` to `capacity` for `TouristicEvent`. APIv2 serialisation for `TouristicEvent` now exposes `capacity` instead of `participant_number` (#3237)
- These fields are still available in API v2 for retrocompatibility but should not be used by default (#3237)
- If you have specific parsers importing into `TouristicEvents`, you should rename `meeting_time` to `start_time` and `participant_number` to `capacity` (#3237)

Bug fixes

- Fix `TouristicEvent` with no end dates are not returned in APIv2 (#3127)

Minor improvements

- Check `begin_date` is before `end_date` in TouristicEvent forms (#3237)
- Set `begin_date` not null for TouristicEvents (#3237)
- Change order of attributes in Event forms and detail view (#3237)
- Update Event SQL view `v_touristicevents` according to above changes (#3237)

Suricate Workflow (#2366)

- Show sentinel email addresses only to workflow manager

New features

- Add new setting `DIRECTION_ON_LINES_ENABLED` to have the `direction` field on lines instead of blades

29.25 2.87.2 (2022-09-23)

New features

- Add `default_language` attribute to Parsers to specify which language to update

Minor improvements

- Ensure attachments from parsers have generated thumbnails

Bug fixes

- Fix `provider` is not used properly when parsing TouristicContents
- Improve Aggregator translation management
- Fix PermissionError during sync-rando on fresh install from .deb package

29.26 2.87.1 (2022-09-20)

Bug fixes

- Fix acces rights on files after synchronization

29.27 2.87.0 (2022-09-20)

New features

- Add `provider` field to Trek, POI, Service, Signage, Infrastructure, TouristicContent, TouristicEvent, Information-Desk, Path, Trail, Course, Site, SensitiveArea (#3189)
- Add parser using api v2 (InformationDesk, TouristicContent, TouristicEvent, POI, Trek, Service, Signage, Infrastructure)
- Add aggregator parser with a conductor using json file

Minor improvements

- Disable debug log in debian package post installation script.
- Improve and fix error logging, now errors and warnings are logged to `var/geotrek.log` and console.

- Allow configuring email alerts for late reports (generalized from Suricate Workflow #2366)

Bug fixes

- Fix filtering on Services List does not filter
- Fix Site creation form is initialized with parent Site
- Fix memory leak and optimize SQL queries on zoning intersections
- Fix error message should not be displayed on attachments from the same structure as user

Maintenance

- Upgrade dependencies. The detail for the main dependencies:
 - django to 3.2.15
 - celery[redis] to 5.1.2

Suricate Workflow (#2366)

- Do not unlock reports when resolving them
- Improve Suricate workflow alert emails

29.28 2.86.0 (2022-09-05)

New features

- Add sync_rando / sync_mobile option *empty_tmp_folder* which will force deletion of all directories / files in tmp directory
- Add information desk uuid (#3189)
- Add setting ALERT_DRAFT which send mail whenever a path has been changed to draft (#2904)
- Add file type to attachments in API v2 (#3189)
- Add possibility to use different type of file with import form
- Add setting MAX_CHARACTERS for rich text fields with Mapentity 8.2.1 (#2901)
- Set map resizable with Mapentity 8.2.1 (#3162)
- Add Category, certification label and status fields on trails (#2900 & #3152)

Minor improvements

- Remove problems of tmp_sync_rando / tmp_sync_mobile which are not removed before new sync_rando / sync_mobile
- Change translation for Tag in Feedback module
- Change concatenation of null value for multiples values from '*' to '_' on sql views
- Prevent "Internal Error" on API v2 when wrong url parameter is provided
- Add 'source', 'portal', 'labels' and 'structure' to Cirkwi trek exports (#3220, #3164)

New ci

- New common interface github actions

Bug fixes

- Set relevant max zoom level for OpenTopoMap in the default config

- Fix fields filter for infrastructure

Maintenance

- Upgrade mapentity to 8.2.1

! Regression !

- System permissions on files output by `sync_rando` and `sync_mobile` commands were inadvertently changed to more restricted with no reading allowed by group or other. This may cause trouble if your deployment relies on those permissions. The original broader permissions have been restored with `v2.87.1`.

29.29 2.85.0 (2022-07-26)

New features

- Fix downgrade user permissions (`is_staff`, `is_superuser`) for external authent (#3156)
- Use permission bypass_structure on attachments and accessibility attachments (#2899)
- Add boolean field ‘display_in_legend’ to Report Status model
- Add setting `ALERT REVIEW` which send mail whenever an object has been changed to review (#2903)
- Add setting `PAPERCLIP_MAX_BYTES_SIZE_IMAGE` unallow usage of huge image (#2902)
- Add setting `PAPERCLIP_MIN_IMAGE_UPLOAD_WIDTH` unallow usage of images with small width (#2902)
- Add setting `PAPERCLIP_MIN_IMAGE_UPLOAD_HEIGHT` unallow usage of images with small height (#2902)
These settings will influence the attachments downloaded in parsers

Documentation

- Add tutorial to visualize sql views in Qgis
- Add sql views for Qgis

Bug fixes

- Fix api v2 services are published by type
- Fix form outdoor/trekking when rating scale is used with modification of practice
- Fix initial value of rating was not shown in trekking form (#3121)

Suricate Workflow (#2366)

- Add form field to enter messages for administrators in Report Workflow Mode
- Improve Suricate workflow alert emails

29.30 2.84.1 (2022-06-21)

Bug fixes

- Fix length_2d or land’s app for exports and lists

29.31 2.84.0 (2022-06-20)

New features

- Add filter valid geometries on topologies (#2515)[3.1]
- Add setting ALLOW_PATH_DELETION_TOPOLOGY which protect or not against deletion of path with topologies linked to it (#2515)[3.3.1]
- Add eid on InformationDesk
- Add parser InformationDesk for Apidae
- Add accessibility on Infrastructure in api v2

Minor improvements

- Add length 2d for land's app for exports and lists (#2976)
- Add option to recalculate altimetry with loaddem command

Bug fixes

- Log entry menu is now only displayed if user has permission (#3130)
- Admin menu is now only displayed if user has permission (#3130)
- Object ‘All history’ button is now only displayed if user has permission (#3130)
- Error 404 default template now display a visible message
- Error 500 default template doesn't make recursive exceptions anymore
- Log entry permissions are now managed by “mapentity - xxx log entries” instead of “admin - xxx log entries”
- Fix information desk filter when outdoor module is not available (#3135)
- Fix APIv2 does not return labels and themes on published outdoor sites

Breaking Changes

- This release requires PostGIS 2.5 or later.
 - Ubuntu bionic 18.04 users, take care, PostGIS default is 2.4. You need to upgrade your PostGIS version.
 - * See documentation <https://geotrek.readthedocs.io/en/latest/install/installation.html#ubuntu-bionic-postgis-2.5-upgrade>

Warning

- From now, Geotrek-admin is not installable on Ubuntu 18.04 bionic anymore. But upgrade are still available.
- The default Nginx configuration template has been improved to increase data loading performances. It is highly recommended to apply changes to your Nginx configuration template (in /opt/geotrek-admin/var/conf/nginx.conf.in).

Improvements

- New GeoJSON generation system, using Django Rest Framework and PostGIS functions (#2967)
- Enable GZIP compression on JSON / GeoJSON by Nginx

Maintenance

- Upgrade mapentity to 8.1.2

29.32 2.83.0 (2022-06-01)

New features

- Display link to attachment in admin site for attachments
- Add license field on attachments (#3089) [thanks to Paul Florence]
- If COMPLETENESS_FIELDS is set for a model an object is published, display completeness fields if missing on page detail (#2898)
- Avoid publication or review if COMPLETENESS_FIELDS is set for a model, and COMPLETENESS_LEVEL is one of ‘error_on_publication’ and ‘error_on_review’ (#2898)

Bug fixes

- Fix APIv2 does not return information desks on published outdoor sites(#3095)
- Fix trail detail link in list view
- Fix infrastructure detail link in list view
- Fix dive detail link in list view
- Fix signage and infrastructure attachment access if published

Documentation

- Improve import from file section

Minor improvements

- Add image widget to tinymce editors by default
- Delete filenames in captions of attachments when importing from Apidae (#2698)
- Add copyright when importing from Apidae on attachments (#2698)
- Improve basic fixture for Feedback app allowing to initialize Report form in one go

Maintenance

- Add a git hook to prevent pushing to master.
- Update to paperclip 2.5.0

29.33 2.82.2 (2022-04-28)

Bug fixes

- Prevent exceptions on malformed images when launching sync_suricate command
- Fix alert on Project list view

29.34 2.82.1 (2022-04-28)

WARNING! Do not use, list view for Projects raises Datatable alert

Bug fixes

- Fix display objects with wrong colors when ENABLE_REPORT_COLORS_PER_STATUS is True

29.35 2.82.0 (2022-04-27)

WARNING!

Do not use, or set ENABLE_REPORT_COLORS_PER_STATUS to False, else objects will not be displayed properly on map
- Release 2.82.1 should be used instead

New features

- Server-side list pagination. Better performance for large lists (#2967)
- Add overlays for objects from Trekking, Maintenance, Infrastructure and Feedback modules (#1300)

Minor improvements

- Refer to Reports by a label instead of email addresses
- Increase default cache expiration from 8hours to 30days (#2967)
- Use distance from setting SENSITIVE_AREA_INTERSECTION_MARGIN in sensitive area filter *trek* in api v2

Bug fixes

- Fix filter *trek* in api v2 for information desks
- Fix filter *trek* in api v2 for pois with setting TREKKING_TOPOLOGY_ENABLED (#3054)

Maintenance

- Update to mapentity 8.0.1

Suricate Workflow (#2366)

- Add `assigned_user` field to Report model
- Add `color` field to Report Status model
- Add TimerEvent class, used to alert Report supervisors when timer expires, with `check_timers` command
- Force workflow when SURICATE_WORKFLOW_ENABLED setting is enabled
- Add setting ENABLE_REPORT_COLORS_PER_STATUS to display different colors in status list view
- Add editable predefined emails
- Display only some reports depending on which user is logged in
- Add City and District information to Report detail page
- Alert user about synchronization problems in Suricate Workflow mode

29.36 2.81.0 (2022-04-11)

New features

- Add SQL default values directly on most tables of the database (#3008)

Minor improvements

- Rename French field names of attachment and accessibility attachment tables (author, legend, title)
- Improve pdf for sites, courses

Maintenance

- Update to paperclip 2.4.3

29.37 2.80.0 (2022-04-05)

Minor improvements

- Improve pdf for sites, courses
- Add a new parameter in parsers, allowing to add multiple values to fields from multiple parsers (#2091)
- Add locale altimetry filters
- Change order list actions and add new signage in signage module (#2852)

Bug fixes

- Fix templates map and image
- Fix trekking's template elevation was not on the right
- Show accessibility block only with datas in accessibility
- Compile messages of every apps
- Fix required language in form is ignored from configuration
- Fix link initial mode is now File (#3001)
- Fix line topologies drawing sometimes fails on some paths
- Fix poi's csv generation of elements from other modules (#2286)
- Fix pdfs booklet outdoor
- Fix api v2 schema targets (GTRV3#607)
- Fix api v2 translation schema targets (values should not be in french)

Maintenance

- Fix required language in form is ignored from configuration
- Allow configuring scheme forwarding through proxy
- Update to paperclip 2.4.2

WARNING!

If an error occurred while checking the signature for debian packaging check troubleshooting section for additional informations

29.38 2.79.0 (2022-03-25)

New features

- Add public booklet pdf for courses, sites, events, contents, dives
- Improve treks pdf templates and add new accessibility fields (#2838)

WARNING!

Check your custom trekking's templates, blocks order changed. There is a huge new block accessibility. Disabled infrastructure's block have been removed

Bug fixes

- Fix maps height when height is bigger than width in treks pdf (#2746)

29.39 2.78.0 (2022-03-22)

New features

- Ability to customize public PDF by portal (#2691)

Minor improvements

- Add block logo in public PDF templates

Bug fixes

- Fix pdf booklet use the right template

29.40 2.77.3 (2022-03-18)

Minor improvements

- Add *only_filters* filter api v2 for labels (#3002)
- Add filter *labels_exclude* for api v2 allowing to exclude particular label on treks, sites

Bug fixes

- Fix parser biodiv didn't collect all sensitive areas (#2966)
- Fix attachments external links (#3001)

Maintenance

- Update to paperclip 2.4.1

29.41 2.77.2 (2022-03-15)

Bug fixes

- Fix migration 2.77.1 publication

Minor improvements

- Add publication informations by lang on infrastructure
- Remove table Infrastructure on infrastructure
- Fix Intervention detail page breaks when target is a Report
- Add translation signage

29.42 2.77.1 (2022-03-11)

Minor improvements

- Show all infrastructures and signages on interventions (#2851)

Bug fixes

- Show trail and path on intervention (#2851)
- Remove duplicate id POI export (#2893)
- Fix migration 2.77.0 publication

29.43 2.77.0 (2022-03-09)

DO NOT USE IT!

New features

- Add filter label sites outdoor api v2
- Add accessibility field on Infrastructure

Minor improvements

- Add ratings_description field in export (#2755)

Bug fixes

- Remove width and height in SVG generating problems in Geotrek-rando V3 by Camille Monchicourt
- Fix labels filter api v2 (#2764)
- Fix linebreaks template detail

Maintenance

- Update to mapentity 7.1.3

29.44 2.76.4 (2022-03-07)

Minor improvements

- Move fields in forms and details (#2755)
- Add information rating scale in csv for treks (#2755)

29.45 2.76.3 (2022-02-09)

Documentation

- Fix documentation trek with gear and not equipments

Bug fixes

- Fix css caption detail
- Fix ACCESSIBILITY_ATTACHMENT_ENABLED setting work as intended
- Fix attachment translations
- Facilitate the comprehension of the difference between fields label_accessibility and approved in touristic content detail
- Fix migration translations equipment and disabled_infrastructure

29.46 2.76.2 (2022-02-08)

DO NOT USE IT!

Bug fixes

- Remove multiple choice ratings by rating scale for treks
- Fix translations equipment and disabled_infrastructure are recovered for gear and accessibility_infrastructure

29.47 2.76.1 (2022-02-07)

New features

- Add ACCESSIBILITY_ATTACHMENT_ENABLED setting allowing to disable/enable menu attachments for accessibility
- Add accessibility field on sites (#2838)
- Change field disabled_infrastructure for accessibility_infrastructure (#2838)

Minor improvements

- Text pasted in rich text fields (TinyMCE) are now cleaned up.
- Facilitate the comprehension of the difference between fields label_accessibility and approved in tourism (#2838)
- Move trek DEM serialization to APIv2 (for 3D view)
- Move trek altimetry profile serialization to APIv2
- Change fixture rating trekking

- Move gear field form and detail (#2838)

Performances

- Fix DEM cache does not invalidate on trek update

Bug fixes

- Fix translation equipment api v2 courses

29.48 2.76.0 (2022-02-02)

New features

- Add ratings, rating scales fields on trekking (#2755)
- Add equipments field on trekking (#2845)
- Add filters altimetry on all apps
- Add accessibility attachments on trekking (#2838)
- Add accessibility field on courses (#2838)
- Add accessibility field on touristic content (#2838)
- Add accessibility field on information desks (#2838)
- Add label accessibility field on touristic content and informations desks (#2838)
- Add information desk type api v2

Minor improvements

- Add translations NL, ES, DE, IT, EN for all apps
- Change admin translations fields, add tab (#2892)
- All rich text fields are updated according new TinyMCE theme.
- Improve API v2 POI serializer to include type labels and pictograms

Maintenance

- Update to mapentity 7.1.0
- Update to django-tinymce 3.4.0 and TinyMCE 5.10.1

Bug fixes

- Fix missing trademark (#2921)
- Fix bootstrap theme in warning and error messages or alerts (#2872)
- Fix search in infrastructure admin panels (#2924)
- Fix APIv2 nearby content filter throws exceptions when queried for missing data (#2926)
- Prevent exceptions when parsers receive integers instead of strings

Performances

- Add missing indexes on geometry fields (WARNING, if you add indexes manually you should delete them before applying migrations) (#2933)

29.49 2.75.0 (2022-01-07)

Tools

- Update check_ign_key tool

New features

- Add new group external authent *EDITOR_TREKKING_MANAGEMENT* (#2842)

Bug fixes

- Fix bootstrap theme in warning and error messages or alerts
- Fix Services external IDs were not displayed in detail pages
- Fix interventions filtering on zonings (#2766)
- Fix interventions shapefiles with *ENABLE_JOBS_COSTS_DETAILED_EXPORT* setting (#1798)
- Fix projects on interventions with GeometryCollection's geometry
- Fix parser when DatabaseError occurs
- Add customization columns *COLUMNS_LISTS* on every models listed in documentation (#2688)

Minor improvements

- Add filtering portals sync_mobile for touristic contents and events (#1941)

Maintenance

- Update to mapentity 7.0.6

29.50 2.74.1 (2021-12-21)

Bug fixes

- Fix blank line due to mapentity template error

Maintenance

- Update to mapentity 7.0.5

29.51 2.74.0 (2021-12-17)

Minor improvements

- Show every paths in intervention csv (#2711)
- Hide signage/blade dropdown-toggle with settings *BLADE_ENABLED=False* (#2852)
- Remove urls blade with settings *BLADE_ENABLED=False* (#2852)

Bug fixes

- Fix multiple forms in formsets deletion (#2693)
- Fix access to pictures generated with watermark (#2840)
- Fix intervention creation and update is now scrollable after merging tabs (#2712)
- Fix restricted area and restricted area type filters on intervention (#2766)

New features

- Allow to filter Cirkwi circuits.xml and pois.xml API with portals and structures (#2822)
- Add restricted area and restricted area type filters on projects (#2766)
- Add reservation_id in /trek API v2 (#2817)

29.52 2.73.0 (2021-12-13)

Bug fixes

- Fix formset item deletion raises error in forms (#2693)

Refactoring

- MapEntity is now a separate dependency (<https://github.com/makinacorpus/django-mapentity>)

New features

- Optimize Path caching in edition views (#2847)
- Filter list views by Restricted Area as well as by Restricted Area Type (#2766)
- Add BLADE_ENABLED setting to hide Blade in Signage forms and in Signage detail page (#2852)
- Add LINE_ENABLED setting to hide Line in Blade forms and in Blade detail page (#2852)
- Add PAPERCLIP_RESIZE_ATTACHMENTS_ON_UPLOAD setting to enable resize attachments on upload (#2835)
- Add PAPERCLIP_MAX_ATTACHMENT_WIDTH and PAPERCLIP_MAX_ATTACHMENT_HEIGHT to configure attachment resizing (defaults 1280px) (#2835)
- Use MAPENTITY_CONFIG setting to configure map style on list and detail views (#2554)

User interface

- Clarify Land Edge module browsing (#1404)
- Renamed “Tronçons physique” to “Types de voie”, “Tronçons de compétence” to “Compétence sentiers”, “Tronçons de gestion de travaux” to “Gestionnaire travaux”, “Tronçons de gestion signalétique” to “Gestionnaire signalétique” (#1301)
- Renamed “zonage réglementaire” to “zonage” (#2766)

Minor improvements

- Merge tabs in Intervention forms (#2712)
- Make targets display more specific in Interventions exports (#2711)
- Improve support for Tourinsoft v3 with new medias management

Bug fix

- Fix TopologyException when filtering objects by several RestrictedAreaTypes

29.53 2.72.0 (2021-11-16)

New features

- APIv2 : Add attachment field to Touristic Event serialization

Minor improvements

- Add possibility to fill code field in Signage model when using loadsignage command. Two parameters added : code_field and code_default

Bug fixes

- Prevent Signages and Infrastructures from being displayed on PDFs when unpublished
- Database: fix SQL cleanup that delete foreign key on core_pathaggregation.path_id -> core_path.id (#2819)
- Fix generation altimetry profile (dem.json)

29.54 2.71.0 (2021-11-03)

New features

- APIv2 : Add filter by portal on outdoor practices and ratings

Bug fixes

- APIv2 : Fix exceptions on filter by portals or themes in Outdoor Course route

29.55 2.70.0 (2021-11-02)

New features

- Add UIDS to the following objects, and to APIv2 serialization for those included : Path, TouristicContent, TouristicEvent, Outdoor Site, Outdoor Course, Attachment, and Topology (inherited by POI, Trek, Service, Trail, Signage, Infrastructure, PhysicalEdge, CompetenceEdge, LandEdge)
- APIv2 : Add pictograms to outdoor practice routes
- APIv2 : Add cities to outdoor sites and outdoor courses routes
- APIv2 : Add filter by themes, cities, districts, types, and structures to outdoor sites and outdoor courses routes
- APIv2 : Change Web Links serialization on outdoor sites routes, to detailed instead of just an id

Breaking changes

- Geotrek-admin now needs PostgreSQL extension ‘pgcrypto’.

WARNING!

Before upgrading to this version make sure to run CREATE EXTENSION IF NOT EXISTS "pgcrypto"; from postgres user in database.

```
su postgres -c "psql -q -d $POSTGRES_DB -c 'CREATE EXTENSION pgcrypto;'"
```

29.56 2.69.0 (2021-10-22)

New features

- Add public PDFs to Outdoor Course and Outdoor Site, with templates

29.57 2.68.1 (2021-10-21)

Bug fixes

- Fix error 404 on CSS from 2.68.0

29.58 2.68.0 (2021-10-20)

DO NOT USE IT!

New features

- Link an Outdoor Course to multiple parent Sites instead of one
- Added notion of points of reference for Outdoor Courses. (Can be disabled with OUTDOOR_COURSE_POINTS_OF_REFERENCE_ENABLED = False)

Breaking change

- APIv2 serialisation for Courses now exposes `sites` instead of `site`

Bug fixes

- Fix translations for Site and Course filters in Interventions list view
- Fix bug that auto-confirms the modal when launching a synchronization (bug introduced with bootstrap migration)

User Interface

- Display children Sites above parent Sites in Outdoor Sites list view

29.59 2.67.0 (2021-10-12)

New features

- APIv2 : Add ‘children’ and ‘parent’ fields to Outdoor Site serialization
- APIv2 : Add filter by practices on outdoor courses
- Filter interventions by Outdoor model targets in Intervention module’s list view

User Interface

- Distinguish Sites from Courses in Outdoor tree display thanks to bullets
- Display full Sites hierarchy in Outdoor detail views

Bug fixes

- Fix nearby Courses and nearby Sites display in Outdoor detail pages
- Fix Outdoor migrations fail on empty database

- Fix sync_mobile does not check for published or unpublished treks

29.60 2.66.0 (2021-09-27)

New features

- APIv2 : Add filter by ratings on outdoor courses and sites
- APIv2 : Add filter by practices in hierarchy on outdoor courses and sites
- APIv2 : Add filter by ratings in hierarchy on outdoor courses and sites
- Display children sites' ratings in site page
- APIv2 : Add ‘sector’ and ‘attachment’ fields to Outdoor Site serialization
- Add DISPLAY_COORDS_AS_DECIMALS setting to format coordinates as decimal degrees instead of degrees minutes seconds
- Enable translations on ‘equipment’ field on Outdoor Course

Bug fixes

- Fix dynamic forms on outdoor cotations display all cotations when selector empty
- Hide excluded POIs on Outdoor Site and Course detail pages

User Interface

- Sort sites by alphabetical order in outdoor course forms

29.61 2.65.0 (2021-09-21)

New features

- APIv2 : Add filter on Outdoor Site route to only retrieve root sites from hierarchy
- Add fields ‘duration’, ‘type’, ‘gear’, ‘ratings_description’ to Outdoor Course
- Add fields on APIv2 for Course model : ‘min_elevation’, ‘max_elevation’, ‘children’, ‘parents’, ‘attachments’
- Add excluded_pois on Course and Site models.
- Add filter on APIVv2 POI endpoint to retrieve pois related to Course or Site
- Replace Outdoor Site ‘ratings_min’ and ‘ratings_max’ fields with ‘ratings’
- Make Outdoor Site and Course ‘ratings’ form fields dynamically change on practice selection
- APIv2 : Add children courses to sites’ serialization
- Add Course Type management to admin site

29.62 2.64.0 (2021-09-14)

New features

- Add endpoints for infrastructure and related types in APIv2
- Add endpoints for signage and related types in APIv2
- Filter TouristicContentTypes according to published content in APIv2

Bug fixes

- Fix missing translations for infrastructure difficulty levels in admin
- Fix impossible import of uninstalled module ‘sensitivity’ in ‘dive’

29.63 2.63.0 (2021-09-03)

New features

- Add difficulty level fields (usage and maintenance) to infrastructure
- Add ‘active’ field to job model, and hide inactive jobs in forms
- Add detailed jobs costs to interventions exports, with a new column for each job
- Add SURICATE_MANAGEMENT_ENABLED setting
- Add SURICATE_MANAGEMENT_SETTINGS setting to configure second Suricate API
- Add helper to make requests to Suricate
- Add parser to retrieve statuses, activities, and reports (in bounding box) from Suricate
- Add sync_suricate command to retrieve Suricate data
- Change Report model to use one of 3 modes : No Suricate, Suricate Report or Suricate Management (SURICATE_REPORT_ENABLED and SURICATE_MANAGEMENT_ENABLED settings)
- Generalize existing filters in APIv2
- Add ‘near_outdoorsite’ and ‘near_outdoorcourse’ filters in APIv2
- Add ‘created_before’, ‘updated_before’, ‘created_after’ and ‘updated_after’ filters in APIv2
- Add route to APIv2 to retrieve Geotrek version
- Add API_V2_DESCRIPTION setting to change description text in API v2 Swagger page
- Add endpoints for services in APIv2 : service, service type
- Add link between reports and interventions

Bug fixes

- Fix length_kilometer attribute computation in treks
- Fix date update format in lists
- Add CORS header to access medias
- Change geographic intersection calculation from annotated queries to optimized build-in method

29.64 2.62.0 (2021-07-06)

New features

- Add custom columns configuration to list views
- Add custom columns configuration to list CSV exports
- Add custom form fields configuration to creation views

Bug fixes

- Fix filter difficulty in API v2

29.65 2.61.1 (2021-06-28)

Bug fixes

- Fix filter in_bbox in API v2

29.66 2.61.0 (2021-06-25)

New features

- Add Web Links to Trek endpoints in APIv2
- Add endpoints for Web Links categories in APIv2
- Ensure APIv2 returns outdoor sites list and outdoor courses list as ordered by localized name

29.67 2.60.0 (2021-06-25)

New features

- Add endpoints for user feedback in APIv2 : report category, report activity, report problem magnitude, and report status
- Ensure APIv2 returns treks list and touristic contents list as ordered by localized name

Bug fixes

- Fix confirm delete attachment modal not visible
- Fix required ‘*geom’ position
- Fix scroll unwanted when list is full
- Fix responsive on dataTables
- Remove excluded POIs from results in POI endpoint on api v2 when filtering by trek id
- Sort attachments listed in api v2 endpoints for Trek, TouristicContent, POI
- Ensure content is displayed only when a related object is published on api v2
- Exclude deleted content of portal filters in api v2

Maintenance

- Update to paperclip 2.3.2

29.68 2.59.0 (2021-06-07)

Breaking Change

- Template nginx.conf.in was changed to work with multiple random portals (#2670).

First, if you changed file `/opt/geotrek-admin/var/conf/nginx.conf.in`, back it up somewhere. 1 - While installing, choose 'Y' to get the new version. 2 - Copy your changes from the backed up file to the new version. 3 - Execute : `dpkg-reconfigure geotrek-admin` to reapply your customization.

User Interface

- Important visual changes due to CSS framework upgrade
- Improve responsive

Maintenance

- Upgrade Bootstrap to 4.6
- Upgrade JQuery to 1.9.1
- Upgrade DataTables to 1.10.23
- Upgrade Chosen to 1.2.0
- Move to vendor folder updated JS Libraries used by Mapentity
- Update HTML markup in many templates, and update tests too
- Expired sessions stored in database are now deleted at each update

Bug fixes

- Fix gpx/kml are not generated on all languages (The first object was working).

29.69 2.58.0 (2021-05-20)

Documentation

- Add documentation ssl

New features

- Mobile API returns multiple pictures for objects like Treks and POIs. Can be configurated with MOBILE_NUMBER_PICTURES_SYNC setting.
- Add filter bad topologies and geoms

Bug fixes

- Fix DistanceToPointFilter usage in API v2
- Fix pdf/gpx/kml are not generated on all languages

29.70 2.57.0 (2021-04-28)

New features

- Add managers field to outdoor sites

Bug fixes

- Fix projection of departure_geom in API v2

29.71 2.56.0 (2021-04-27)

Bug fixes

- Fix API v2 crash when trek geom is a point

New features

- Add outdoor course endpoint to API v2
- Add all fields to outdoor site/course exports (csv/gpx/shp)
- Link outdoor sites and courses to other objects, especially POIs, infrastructures and interventions

Documentation

- Update database ULM schemas (with outdoor)
- Update faq.rst
- Proofreading

Maintenance

- Update parser for Esprit Parc National data streams
- Upgrade Weasyprint to 52.5
- Use screamshotter >= 2.0.9 by default

Security

- Bump django-debug-toolbar from 3.1.1 to 3.2.1

29.72 2.55.1 (2021-04-15)

Documentation

- Add outdoor section to user manual

Bug fixes

- Fix themes not including published touristic contents/events in API v2
- Fix duplicate Access-Control-Allow-Origin header in sensitive areas API endpoint
- Fix orientation/wind labels in outdoor course filter
- Hide “Add a brother site” link if no parent site
- Filter outdoor site/course orientations with a OR instead of a AND
- Reverse wind arrows

Maintenance

- Use upstream appy dependency

29.73 2.55.0 (2021-04-09)

New Feature

- Add /sensitivearea_species endpoint on api v2

29.74 2.54.0 (2021-04-09)

New Feature

- Add ‘trek’ filter on endpoint /sensitivearea in api v2

29.75 2.53.1 (2021-04-07)

Bug fixes

- Fix geojson display in API V2 /trek/ endpoint
- Add publication filter by language on /trek/ detail view endpoint
- Fixed the fact that the detail view of /trek/ endpoint crash when a trek has more than one parent
- Do not display elements linked to content not published or not used at all in multiple endpoints on API V2

29.76 2.53.0 (2021-04-01)

New Feature

- Add departure_city attribute to treks and touristiccontents in API v2
- Allow to filter nomenclatures by portal in API v2
- Allow to retrieve a single unpublished trek if its parent is published in API v2

Maintenance

- Simplify code thanks to Python 3 (thanks to Claude Paroz)
- Add new sentry-sdk dependency

Bug fixes

- Avoid a db connection when requesting time from database (thanks to Claude Paroz)

Security

- Bump lxml from 4.6.2 to 4.6.3

29.77 2.52.0 (2021-03-25)

Bug fixes

- Allow to add an outdoor sub-site or a course in a site owned by another structure
- Fix outdoor site orientation/wind filtering
- Add missing outdoor module translations

New Feature

- Outdoor course itinerary
- Add altimetry informations to outdoor sites and courses
- Add outdoor course fields height and equipment
- Add course layer to layers control
- Allow VAR_DIR setting from environment (thanks to Claude Paroz)
- Allow easier customization of loadpaths command (thanks to Claude Paroz)

Security

- Bump pillow from 7.1.2 to 8.1.1
- Bump jinja2 from 2.11.1 to 2.11.3

29.78 2.51.2 (2021-03-16)

Bug fixes

- Translate all text fields in API v2 trek endpoint
- Serve attachments for flatpages
- Fix bbox filtering of interventions

Performances

- Add prefetch to Path exports (CSV/Shapefile/GPX)

29.79 2.51.1 (2021-03-05)

Bug fixes

- Fix departure_geom attribute in API v2 (WGS84 projection, without Z)

29.80 2.51.0 (2021-03-02)

New features

- Add filtering by restricted area types
- Add outdoor course module
- Add a site/course tree view in outdoor site and course detail pages

Bug fixes

- Fix a backward compatibility to keep MAP_STYLES['xxx'] config working in custom.py. However, we recommend to use new MAPENTITY_CONFIG['MAP_STYLES'] for this.
- Use 2D lengths instead of 3D length for Geotrek-rando (to be consistent with Geotrek-mobile)
- Translate touristiccontent_category endpoint in API v2
- Fix crash of trek endpoing in API v2 when a geometry is a multilinestring (the previous fix was not working)

29.81 2.50.0 (2021-02-19)

BREAKING CHANGES

- Change URL of some API v2 enpoints. See Swagger online doc.
- API v2 thumbnails are now 400px large
- Split PDF urls by language in API v2

Bug fixes

- Fix API v2 crash when trek geom is a multilinestring
- Fix touristic content filtering in API v2 when both type1 and type2 are specified
- Synchronize pictogram for service types in mobile app

New features

- Cover image for static pages

Performances

- Automatically remove temporary topologies created before version 2.48.0.

Security

- Upgrade cryptography from 3.2 to 3.3.2

29.82 2.49.0 (2021-02-09)

BREAKING CHANGES

- MAP_STYLES setting should be now set in MAPENTITY_CONFIG['MAP_STYLES']. A fallback exists to keep configuration from MAP_STYLES.
- The name of several filters in APIv2 are now in plural form. See swagger doc.

Bug fixes

- Fix cities filter in API v2 when id begins with a zero
- Fix cities and districts filter in API v2 when given id is nonexistent
- Allow to pass more than one id in most API v2 filters (see swagger doc)
- Allow to filter on several items in most list page filter

New features

- Add flatpage endpoint to API v2
- Add sector filter to outdoor site liste page
- Compute aggregated fields only from children, not parents for outdoor sites
- Practice, sector, wind and orientation filters on outdoor sites now take children into account

29.83 2.48.1 (2021-02-05)

Bug fixes

- Fix missing geometry in API v2 touristiccontent endpoint when using near_trek filter

29.84 2.48.0 (2021-02-03)

Performances

- Do not save temporary topologies in database. Sometimes they are not removed and accumulate

Refactoring

- Allow to use zoning app independently of others apps

Minor improvements

- Add id attribute to source and informationdesk APIv2 endpoints
- Add structure attribute to touristic contents/events in API v1
- Add publication, hierarchical level, practices and modification time columns to outdoor site list

29.85 2.47.2 (2021-01-28)

Bug fixes

- Fix crash in API v2 for touristics contents with alphanumeric external id

29.86 2.47.1 (2021-01-27)

Bug fixes

- Remove thumbnail and pictures attribute from API v2
- Replace them by the attachments attribute on Trek, POI and Touristic content
- The pdf attribute now returns an absolute URL

Performances

- Do not recreate geometry columns indexes at each upgrade

29.87 2.47.0 (2021-01-26)

New Feature

- Add cities and departure_geom fields to API v2 trek endpoint
- Add practice filter to API v2 trek endpoint
- Add touristiccontentcategory endpoint to API v2 (with types)
- Add many fields and filters to touristiccontent API v2 endpoint

Performances

- Optimize generation of the list of cities in list pages

29.88 2.46.0 (2021-01-25)

Database change

- “mnt” DEM table is now managed by django. It was renamed with altimetry_dem label. Data coming from mnt will be copied to new table.

Security fixes

- Enable XFrameOptionsMiddleware
- Hide nginx version
- Disable swagger (API v2 documentation) by default. To enable it, see swagger item in advanced documentation page.
- Fix XSS in filter popover

Bug fixes

- Fix impossibility to add paths on Ubuntu 20.04 (PostGIS 3)
- Fix doc that explains how to load fixtures

New Feature

- Allow to select API v2 fields for all endpoints
- Optimize development environment
- Add an order field on rating scales

- Allow multiple cardinal points for wind and orientation
- Add sectors for outdoor sites
- Add pictograms to outdoor practices and ratings
- Compute outdoor site sector, practice, orientation and wind from childs and parents

29.89 2.45.0 (2021-01-10)

HAPPY NEW YEAR!

Security fixes

- Upgrade cairosvg and lxml libraries

Bug fixes

- Fix migrations if some outdoor sites were created before
- Fix missing placeholders for orientations in filter
- Fix outdoor fixtures
- Fix doc to enable outdoor
- Fix path edition with PostGIS 3 (on Ubuntu 20.04)
- Allow site type to be blank

New Feature

- Add min/max ratings for outdoor sites
- Reorder outdoor site fields

29.90 2.44.0 (2020-12-18)

New Feature

- Add new fields to outdoor sites
- Allow geometrycollection for site geometry

29.91 2.43.1 (2020-12-10)

Bug fixes

- Remove a SQL debug

29.92 2.43.0 (2020-12-10)

BREAKING CHANGES

- Old attachments are now deleted by default in parser. Add `delete_attachment = False` attribute to your parsers if you want to keep old behaviour (unlikely).

Bug fixes

- Fix creation of interventions with their own topology
- Fix height of map on detail/create/update pages

29.93 2.42.0 (2020-12-04)

New Feature

- Minimal outdoor module (see documentation to enable)

Bug fixes

- Fix API v2 swagger

29.94 2.41.2 (2020-11-27)

Bug fixes

- Do not create point edges on zone borders (fix some crash when adding paths)
- Enable postgis_raster extension when creating a new DB in Ubuntu 20.04 package

WARNING!

- Geotrek Ubuntu repository changed to managed two versions (18.04 and 20.04) in parallel. If you already installed Geotrek Ubuntu package before you should run once ‘`sudo apt-get update --allow-releaseinfo-change`’ to accept these changes.

29.95 2.41.1 (2020-11-25)

Bug fixes

- Fix publish ubuntu 20.04/18.04

29.96 2.41.0 (2020-11-25)

New Feature

- Allow to install geotrek on ubuntu 20.04 and 18.04

Maintenance

- Upgrade from Django 2.2 to Django 3.1

Minor Changes

- Names of file in shapefiles changed

Bug fixes

- Truncate attachment legend too long in AttachmentParserMixin

29.97 2.40.1 (2020-11-23)

Bug fixes

- Fix dive pictogram (fix PDF crash)

Minor Changes

- Remove language from user profile. Now you can switch language from menu.
- More API v2 improvements (trek endpoint, new API_IS_PUBLIC setting)

Doc improvements

- Update translation

29.98 2.40.0 (2020-11-18)

New Features

- Handle different file formats in loadpoi command (all formats supported by gdal)
- Improve API V2 filters and endpoints

Bug fixes

- Fix tooltip hidden on module bar (change layout mode to display flex)

Doc improvements

- Reorganize index
- Add sphinx container for dev mode
- Improve custom dist to give right templates of values in parameters

29.99 2.39.1 (2020-10-28)

Bug fixes

- Fix delete draft permission should allow use delete button

29.100 2.39.0 (2020-10-27)

New Features

- Modification of API V2 routes
- Add some filtering on Treks in API V2

Doc improvements

- Fix doc development command line
- Improving docs : advanced configuration / synchronisation

29.101 2.38.6 (2020-10-20)

Bug fixes

- Fix middleware interfaces without ipv4

Minor Changes

- Pictogram for trek's label is optional

29.102 2.38.5 (2020-10-20)

New Features

- Create new label for trekking, move inside_park to this label

29.103 2.38.4 (2020-10-16)

New Features

- Add relation between a Report and a Trek
- Change Report mail template to link the related Report in admin

Minor Changes

- Handle Z coordinates on GPX files
- Force size pictograms in admin

Doc improvements

- Add info about what's new in 2.33
- Change commands and so according to 2.33 [camillemonchicourt]
- Fix doc about spatial extent setting

29.104 2.38.3 (2020-10-05)

Bug fixes

- Fix diving levels display on lists
- Fix scrollable leaflet right control layer
- Fix lists in csv (#2286)

Doc improvements

- Add doc for translating
- Update synchronization with sync_rando options (Thanks JeanLenormand)

New Feature

- Show booklet pdf version on detail view

29.105 2.38.2 (2020-09-24)

Bug fixes

- Fix APIDAE parser when there is no element
- Fix booklet generation with pdfimpose

29.106 2.38.1 (2020-09-22)

Bug fixes

- Fix USE_BOOKLET_PDF setting

29.107 2.38.0 (2020-09-21)

New Feature

- Add facebook informations on target Portals
- Add description and title on target Portals
- Synchronize multiple meta informations with target portals.
- Add booklet pdfs with setting USE_BOOKLET_PDF

Bug fixes

- Fix stake deletion list
- Fix generation of stake automatically created with factories

Minor changes

- Fix use of screamshotter and convertit for development
- Use official postgis docker image
- Change of legend size on pdfs

Doc fixes

- Update suricate configuration doc
- Update anonymize report documentation

29.108 2.37.0 (2020-09-16)

Bug fixes

- Fix script install

New Feature

- Add second external id api v2 for treks

29.109 2.36.1 (2020-09-04)

Bug fixes

- Fix crash in json DEM generation if the topology is a point

29.110 2.36.0 (2020-09-01)

New Feature

- Allow to (un)publish some cities/district/areas on Geotrek-rando/mobile

29.111 2.35.1 (2020-08-24)

Bug fixes

- Really add an id field to each SQL view

29.112 2.35.0 (2020-08-21)

New Feature

- Allow for custom SQL to be run at install/upgrade

Bug fixes

- Add an id field to each SQL view to allow QGIS to open them

29.113 2.34.0 (2020-07-10)

New Feature

- Add reservation system/id fields to treks to allow itinerancy online booking
- Add category code (used in Geotrek-rando) to categories list in admin

Minor changes

- Add install scripts for Ubuntu packages

Bug fixes

- Fix icons display in categories list in admin

29.114 2.33.13 (2020-07-01)

New Feature

- Add fields to reports for Suricate support
- Add helper to send report to Suricate API on save, if setting *SURICATE_REPORT_ENABLED* is *True*

29.115 2.33.12 (2020-06-23)

Bug fixes

- Change doc flatpages-flatpages.jpg to png
- Fix line topologies create path
- Fix svg's fixtures which cannot be transform as png with cairosvg
- Fix duration's filter mobile
- Fix report email OSM coords

New Feature

- Synchro mobile get only used practice, themes, networks ...

29.116 2.33.11 (2020-06-05)

Bug fixes

- Fix long attachments name synchro

29.117 2.33.10 (2020-06-02)

Bug fixes

- Fix migration is_image 0011_attachment_add_is_image

New Feature

- Allow to clean attachments not used anymore (clean_attachments)

29.118 2.33.9 (2020-06-02)

Bug fixes

- Fix small treks profile

29.119 2.33.8 (2020-05-22)

Bug fixes

- Fix package install if geotrek user already exists
- Attachment download error breaks global import

29.120 2.33.7 (2020-05-18)

Bug fixes

- Show blades without line in signage detail page
- Fix information desks editing
- Fix trek and POI filtering

29.121 2.33.6 (2020-05-14)

Bug fixes

- Don't overwrite initial data in existing database on first install

29.122 2.33.5 (2020-05-13)

Bug fixes

- Add a scrollbar to signage and blade forms
- Fix city affection for looping paths
- Fix attachment download with redirection
- Fix logout next page

- Fix blade/line creation crash
- Fix lines layout in blade detail page

Upgrade notes

If you installed version 2.33.3 before (no matter if you upgrade directly or from 2.33.4), you should get errors like “django.db.utils.ProgrammingError: column “deleted” of relation signage_blade”. To fix them, run `sudo geotrek migrate --fake signage 0016;`.

29.123 2.33.4 (2020-05-04)

Minor changes

- Improve blade CSV export

Bug fixes

- Fix ordering of blades
- Fix empty attachment link in admin list
- Fix some french translations
- Fix redirections when downloading attachments in parsers
- Fix migrations when DB contains a deleted blade
- Fix stdout flush in sync commands

Maintenance

- Upgrade from Django 2.0 to Django 2.2
- Fix deprecation warnings

29.124 2.33.3 (2020-04-28)

No changes. Just force a new build in CI

29.125 2.33.2 (2020-04-28)

No changes. Just force a new build in CI

29.126 2.33.1 (2020-04-28)

No changes. Just force a new build in CI

29.127 2.33.0 (2020-04-28)

BREAKING CHANGES

- New installation method (Ubuntu packaging)
- Alternative installation method (Docker, for experts only)
- Remove name field from feedback report, to be GDPR compliant
- Rename functions, triggers and sequences in database

Bug fixes

- Fix timeout when saving long treks (increase computation performances)
- Fix mechanism to put tables in postgresql schemas
- Better download errors handling in parsers
- Make sure signage and related blade have the same related structure

Maintenance

- Upgrade from Django 1.11 to Django 2.0

New features

- Allow to attach interventions to blades, paths, trails, treks, POIs and services in addition to infrastructures and signages
- Allow to merge dropdown list items in admin. Check them in list view and choose “Action: Merge”
- Add a django command to erase email from feedback reports after 365 days

Upgrade notes

- The installation method has been totally rewritten with an Ubuntu packaging (`apt install geotrek-admin`), only available for Ubuntu 18.04 actually.
- If you upgrade from Geotrek-admin <= 2.32, then apply the dedicated migration script. See <https://geotrek.readthedocs.io/en/master/installation.html#upgrade-from-geotrek-admin-2-32>.
- Geotrek-admin is now automatically installed in `/opt/geotrek-admin/` directory and the advanced configuration file moved to `/opt/geotrek-admin/var/conf/custom.py`. See advanced configuration documentation for details.
- The automatic NGINX configuration can be overridden in `/opt/geotrek-admin/var/conf/nginx.conf.in` file. See NGINX configuration documentation for details.

29.128 2.32.11 (2020-03-17)

Minor changes

- Add UML digrams of data model to documentation
- Remove URL in weblinks dropdown
- Move ambiance after description teaser

Bug fixes

- Fix a WeasyPrint warning
- Fix zoning filters on path

29.129 2.32.10 (2020-03-11)

Bug fixes

- Fix POI, touristic contents and touristic events sort in mobile v3 API
- Change Lambert93 signage coordinates format
- Fix TourInSoftparser with # inside <MoyenDeCom> values
- Show File and URL fields as required in attachment form
- Do not show Function field as required in Intervention form
- Do not show Amount and Organism fields as required in Project form

29.130 2.32.9 (2020-03-06)

Bug fixes

- Fix “upper bound of FOR loop cannot be null” crash in SQL triggers

29.131 2.32.8 (2020-03-05)

Minor changes

- Allow to choose Touristic content ordering in API
- Add external ID to projects and interventions

Bug fixes

- Fix the modification of the published field without the “Can publish...” permission

29.132 2.32.7 (2020-03-02)

BREAKING CHANGES

- Rename tables and fields in database

Minor changes

- Retry on HTTP 503 errors in parsers

Bug fixes

- Fix install on Xenial (again)
- Fix video embed url https
- Fix “Only LINESTRING and MULTILINESTRING are supported” crash in SQL triggers

29.133 2.32.6 (2020-02-28)

DO NOT USE IT!

29.134 2.32.5 (2020-02-18)

Bug fixes

- Fix filters sort in mobile v3 API

29.135 2.32.4 (2020-02-12)

Bug fixes

- Fix install on Xenial

29.136 2.32.3 (2020-01-27)

Bug fixes

- Fix review, publish do not display after resave a published or without permission to publish
- Fix attachment asterisks and crispy form
- Display only one time the same path when on trail detail

29.137 2.32.2 (2020-01-09)

Bug fixes

- Upgrade WeasyPrint

29.138 2.32.1 (2019-12-20)

Bug fixes

- Fix a crash in stake computation when adding an intervention
- Fix a crash in project list when one of them has no end year
- Fix dropping with no-data DEM values
- Fix nav pills to choose language in forms

29.139 2.32.0 (2019-12-13)

New features

- Add DISPLAY_SRID into settings to allow user to choose it's own format for GPS coordinates
- Make some fields optional (class Trail, Intervention, Project, OrdererdTrekChild, POI)
- Sort dropdown lists
- Document settings

29.140 2.31.0 (2019-12-06)

New features

- Sync mobile data from web UI
- The SHOW_LABELS setting allows to hide status labels on map

29.141 2.30.0 (2019-11-26)

Breaking changes

- Remove support of Ubuntu 14.04 Trusty

Maintenance

- Move from Python 2 to Python 3

Bug fixes

- Fix PDF generation for not published treks

29.142 2.29.15 (2019-11-12)

Bug fixes

- Fix install (use a version of venusian that is compatible with Python 2)

29.143 2.29.14 (2019-11-04)

Bug fixes

- Do not check structure for excluded POIs

29.144 2.29.13 (2019-10-30)

Minor changes

- Do not set structure by default when creating elements in dropdown lists.
- Trek duration is now optional
- Automatically disable empty filters in API for mobile v3
- Add support for Tourinsoft v3 in addition to v2
- Add more links form/to sensitive areas
- Add more unit tests

Bug fixes

- Fix SEO for static page titles
- Fix TouristicContentParser deletion having type1/2 with same values
- Fix serialization of MultiPolygon sensitive areas

29.145 2.29.12 (2019-10-23)

Minor changes

- Show completeness on dive detail page
- Add practice field to trek and dive completeness

Bug fixes

- Fix multiple sensitive areas on treks with settings SENSITIVE_AREA_INTERSECTION_MARGIN = 0
- Fix multiple sensitive areas on dives

29.146 2.29.11 (2019-10-17)

Bug fixes

- Fix filter still available after come back to list
- Add settings allowing to change permission on voluminous datas. Voluminous datas are not stocked at the same place

29.147 2.29.10 (2019-10-08)

Minor changes

- Do not set username as attachment author by default

Bug fixes

- Don't crash sync_rando with PIL.Image.DecompressionBombError
- Fix mode selection when adding/editing an attachment

- Fix authenticated parsers

29.148 2.29.9 (2019-10-02)

Bug fixes

- Fix sync_rando : sensitive area with multi polygons

29.149 2.29.8 (2019-09-26)

Minor Changes

- Increase path name field length

Bug fixes

- Fix csv_display signage with not ascii character

29.150 2.29.7 (2019-09-25)

Minor Changes

- Add pois services tourism on sync_rando
- Add endpoints api for diving

Bug fixes

- Fix is_public() call checking if the object is ppublic or not.
- Remove duplicate description detail diving

29.151 2.29.6 (2019-09-19)

Bug fixes

- Fix sync_rando command with diving

29.152 2.29.5 (2019-09-13)

Bug fixes

- Sync POIs related to dives
- Fix sync of manual PDF (again)

29.153 2.29.4 (2019-09-09)

Minor Changes

- Add reviews in dives module

Bug fixes

- Fix length should be length_2d in pdfs

29.154 2.29.3 (2019-08-28)

Minor Changes

- Allow to override nginx port in etc/settings.ini

Bug fixes

- Fix sync of manual PDF

29.155 2.29.2 (2019-08-28)

Minor Changes

- Add a command to import dives

Bug Fixes

- Fix crash when a dive is not a point

29.156 2.29.1 (2019-08-26)

Minor Changes

- Show treks related to dives

Bug fixes

- Fix retrieval of content-length of attachments with HTTPS
- Fix detection of hardcoded SRID in migrations
- Fix Est/West swap in diving module
- Fix version of more-itertools
- Fix missing difficulty and technical levels in dive detail page and PDF

29.157 2.29.0 (2019-08-20)

New features

- Diving module (optional, see manual to enable)

Minor Changes

- Improve mobile sync
- Do not automatically zoom over level 16

Bug fixes

- Fix black map screenshots (after a manual cache deletion)
- Fix related POI order with dynamic segmentation disabled

29.158 2.28.0 (2019-08-09)

New features

- Geotrek without dynamic segmentation is back

Minor Changes

- Add a settings allowing to remove certain items from the left menu
- Serve attachment with ‘Topoguide’ type as public PDF

Bug fixes

- Fix missing pictograms for mobile app
- Translate feedback acknowledgement email
- Fix sync_mobile command for itinerary

29.159 2.27.12 (2019-07-22)

Minor Changes

- Add itinerary mobile

29.160 2.27.11 (2019-07-17)

Minor Changes

- Change condition’s on_delete for SET_NULL
- Add the possibility to add Multipoint with one Point on commands loadinfrastructure/loadsignage

Bug fixes

- Fix choices fields, should only take in account existing (not deleted) elements
- Fix delete Organism
- Fix sensitivity parser with MultiPolygon

- Fix profile and languages

29.161 2.27.10 (2019-07-10)

Minor Changes

- Set OpenTopoMap as default map background
- Resize information desk type pictograms in mobile API

Bug fixes

- Fix delete intervention type

29.162 2.27.9 (2019-07-01)

Minor Changes

- Add ambiance field to trek detail endpoint in mobile API

29.163 2.27.8 (2019-06-28)

Minor Changes

- Add primary color setting for PDF
- Allow to override practices pictogram color in custom trek PDF template

29.164 2.27.7 (2019-06-26)

Bug fixes

- Fix public PDF overflow
- Resize category and POI pictograms for mobile app
- Convert pictograms from SVG to PNG for mobile app
- Fix structure (or not) related scrolldowns validation
- Remove unvisible paths in remove_duplicate_paths command
- Fix list of additional layers in layer selector
- Don't reset excluded POIs when saving treks

Minor Changes

- Allow to merge multiple comment columns when importing paths
- Add color field to touristic contents categories (for mobile app only)
- Handle invalid geometries when importing districts

29.165 2.27.6 (2019-06-04)

Bug fixes

- Fix mobile API

29.166 2.27.5 (2019-05-29)

Bug fixes

- Fix regulatory sensitive area parser
- Fix handling of parser errors

29.167 2.27.4 (2019-05-27)

Bug fixes

- Fix crash with –srid option of loadpaths command
- Add option portal in sync_mobile for the treks
- Fix encoding error on watermarks
- Fix bad references to sync_mobile in sync_rando command

29.168 2.27.3 (2019-05-23)

New features

- Allow to set order of filters in mobile API
- Add ascent and district filters to mobile API

Minor Changes

- Replace text by an id in url of pictures with watermarks
- Change default settings watermark

Documentation

- Add PDF overriding section

29.169 2.27.2 (2019-05-14)

Minor Changes

- Add points_reference by treks in api mobile

Bug fixes

- Remove public pdf poi
- Fix filter cities without paths

29.170 2.27.1 (2019-05-06)

Bug fixes

- Fix api mobile with only sensitivity app

29.171 2.27.0 (2019-05-02)

New features

- Add watermark on pictures
- Allow to change structure of an object with permission by_pass_structure

Bug fixes

- Fix a floating point computation problem in SQL trigger
- Fix trails in detail of intervention and opposite
- Fix color on restricted area

29.172 2.26.5 (2019-04-19)

Bug fixes

- Add slug to mobile API
- Fix crash with empty images

29.173 2.26.4 (2019-04-18)

Bug fixes

- Fix migration tourism 0004

29.174 2.26.3 (2019-04-12)

Bug fixes

- Fix parsers delete datas

Minor Changes

- Add command loaddistrict, loadcities, loadpaths

29.175 2.26.2 (2019-04-10)

Bug fixes

- Fix sync_rando command (BadZipfile exception)
- Fix nginx and Django conf when SSL is enabled
- Fix restricted area layers

29.176 2.26.1 (2019-04-03)

Bug fixes

- Fix blade form
- Fix sync_mobile, sync_rando with url https and http

29.177 2.26.0 (2019-04-01)

New features

- New API for mobile app v3

Bug fixes

- Fix signage type pictograms
- Some cosmetics on tourism detail pages (clickable links)
- Fix Tourinsoft opening period parsing (multiple periods)
- Fix Bad Status Line exception

29.178 2.25.3 (2019-03-26)

Bug fixes

- Fix Tourinsoft parsers one time again (practical info for events)

29.179 2.25.2 (2019-03-26)

Bug fixes

- Fix Tourinsoft parsers again (postal address)

29.180 2.25.1 (2019-03-25)

Bug fixes

- Fix Tourinsoft parsers

29.181 2.25.0 (2019-03-25)

New features / Performances

- Add the possibility to load layers (do not load them automatically)

Minor changes

- Add Touristic Content TourInSoft Parser
- Add tool testing ign keys without ggp3

Documentation

- How to update IGN urls

29.182 2.24.8 (2019-03-15)

Bug fixes

- Fix bug parsers filetype not related with structure

29.183 2.24.7 (2019-03-13)

Minor changes

- Add elevation on sensible areas

Bug fixes

- Fix retry sync_rando tiles when tiles does not exist (landez 2.4.1)

29.184 2.24.6 (2019-03-07)

Bug fixes

- When updating interventions, stake field is no more required
- Fix duplicates in year filters in intervention module
- Configurable blade code
- Allow letters in blade number
- Improve signage templates
- Add “On signage/infrastructure” filter on intervention list

29.185 2.24.5 (2019-03-06)

Performances

- Add index to date_update columns

29.186 2.24.4 (2019-03-01)

Bug fixes

- Fix get attachments with crop

29.187 2.24.3 (2019-02-28)

Bug fixes

- Fix get attachments using generic foreign and not url
- Fix merge path

29.188 2.24.2 (2019-02-26)

Bug fixes

- Fix attachments and history linked with signage and infrastructure

29.189 2.24.1 (2019-02-12)

Bug fixes

- Fix install.sh (pin cairocffi version)
- Fix routing on paths with sharp angles
- Fix loadrestrictedareas command
- Fix altimetry on straight portions of paths
- Various signage fixes

Performances

- Allow client side caching with systematic revalidation for Layer, JsonList and graph views
- Remove validation of history bar
- Don't bringToFront() every single feature on map
- Do not show bullets at path extremities anymore by default. Set SHOW_EXTREMITIES setting to True in custom.py enable them.
- Remove networks and trails columns in path list

29.190 2.24.0 (2019-01-28)

New features

- Bulk path deletion

29.191 2.23.0 (2019-01-24)

New features

- Signage blades management
- Add gpx and kml export for path detail view
- Allow to load local GPX/Geojson file in list views

Bug fixes

- Fix sensitive areas API v2
- Fix migrations if infrastructure app not is not installed

29.192 2.22.10 (2019-01-09)

Bug fixes

- Fix duplicated results in API v2 with sensitive area filters

29.193 2.22.9 (2019-01-09)

Minor changes

- Separate Infrastructure and Signage models
- Create parser touristic event for apidae
- Refactor ApidaeParser

Bug fixes

- Add italian translations that are visible on Geotrek-rando
- Fix permissions attachments paperclip

Performances

- Improve map's performances

29.194 2.22.8 (2019-01-03)

Minor changes

- Now, empty portal field means “all portals” instead of “no portal”

29.195 2.22.7 (2019-01-03)

Bug fixes

- Fix command loadinfrastructure

29.196 2.22.6 (2019-01-02)

Minor changes

- Index path draft field
- Add eid field to load_infrastructure command
- Add loadrestrictedarea command
- Install postgis package

29.197 2.22.5 (2018-12-19)

Bug fixes

- Fix DB migration

29.198 2.22.4 (2018-12-19)

Bug fixes

- Replace u2028 and u2029 by n in synced (geo)json files (fix Geotrek-mobile crash)

Minor changes

- Add EID field to all models and increase its length

29.199 2.22.3 (2018-12-14)

Bug fixes

- Don’t publish deleted infrastructures/signages
- Add default pictograms to published infrastructures/signages

29.200 2.22.2 (2018-12-10)

Bug fixes

- Fix bugs with HTTPS access
- Fix for some modules to edit attributes and not the geometry

Minor changes

- add options to sync signages and infrastructures
- sync global signages and infrastructures

29.201 2.22.1 (2018-11-27)

Bug fixes

- Fix trekking form with pois_excluded
- Give the possibility to get type of infrastructures and signages without structure

29.202 2.22.0 (2018-11-27)

New features

- Allow to publish signage and infrastructure
- Allow to exclude POIs from a trek
- New access rights to edit draft path
- New access rights to edit attributes and not the geometry
- Allow to remove duplicate path in database : command remove_duplicate_paths

Bug fixes

- Fix snap on crossing point : take all paths easier
- Fix a clash between current url and SYNC_RANDO_OPTIONS
- Fix screamer when SSL is enabled

29.203 2.21.1 (2018-09-18)

Breaking changes

- Remove type1 from trek API when SPLIT_TREKS_CATEGORIES_BY_PRACTICE is not set
- Rename Trek category label to Hike in API. You can override this in geotrek/locale/<language code>/LC_MESSAGES/django.po files

Bug fixes

- Fix crash in log entries view

Minor changes

- Save column sort by module
- Rename SITRA to APIDAE

29.204 2.21.0 (2018-09-04)

New features

- Path deletion warning page now shows linked topologies
- Allow to add Dailymotion video attachments
- Add a command to unset structure in lists of choices and group choices with the same name

Bug fixes

- Fix Sync_rando View
- Fix loaddem
- Fix creation of Youtube/Soundcloud attachments
- Fix cancellation when editing geometries
- Show which structure choices are related to
- Add confort and stake filters to path list
- Fix sync of touristic contents for mobile app

29.205 2.20.1 (2018-07-16)

Bug fixes

- Fix Completed Filter in Touristic Event

29.206 2.20.0 (2018-06-27)

New features

- Allow to share glossaries between structure (just keep structure field empty)
- Allow to import infrastructures, not only signages
- Allow to split treks by itinerary
- Path deletion does not delete the related point topologies anymore. Instead point topologies are linked to the nearest remaining path.
- Keep inode and mtime when synced file don't change

Minor changes

- Optional img-responsive class on flatpage images

Bug fixes

- Fix virtualenv install
- Upgrade celery to 4.1.1

- Fix the bug which remove a path when we merge 2 paths with a 3rd path on the point of merge. (ref #1747)

29.207 2.19.1 (2018-05-28)

Bug fixes

- Update APIDAE API URL
- Fix filename encoding errors in import

29.208 2.19.0 (2018-05-22)

Minor changes

- Allow to specify encoding when importing data

29.209 2.18.5 (2018-05-07)

Bug fixes

- Fix related structure when creating new objects

Minor changes

- Show related structure on all detail pages

29.210 2.18.4 (2018-05-02)

Bug fixes

- Fix sync of deleted sensitive areas
- Fix touristiccontents.geojson crash when reservation_system is None

Minor changes

- Add Ubuntu 18.04 Bionic Beaver support

29.211 2.18.3 (2018-04-27)

Bug fixes

- Fix imports when enabling only sensitivity app

29.212 2.18.2 (2018-04-27)

Preventive maintainance

- Upgrade to Django 1.11
- Upgrade several python dependencies

Minor changes

- Allow user with can_bypass_structure permission to set or update the related structure on sensitive areas

Bug fixes

- Put back filter widgets in two columns (#1663)
- Do not include (possibly forged) structure field in post requests
- Fix geojson format in sensitive areas API
- Fix filtering by practices in sensitive areas API
- Fix sync_rando when sensitivity app is not enabled
- Adapt BiodivParser to API modifications
- Order sensitive areas by decreasing area in API to be able to clic on each of them
- Set ownership in parsers depending on logged user
- Pagination requires ordering in v2 API

29.213 2.18.1 (2018-03-26)

Bug fixes

- Fix distribution of tables in schemas
- Allow to reset type1/type2 in TouristicContentSitraParser

Minor changes

- Do not truncate install.log

29.214 2.18.0 (2018-03-22)

Breaking changes

- Drop support of Ubuntu Precise 12.04, please upgrade to Trusty 14.04 or Xenial 16.04 before upgrading Geotrek-admin

Preventive maintainance

- Upgrade to Django 1.9
- Upgrade several python dependencies

Bug fixes

- Fix path duplication in path split trigger

Minor changes

- Show total path length in path list

29.215 2.17.3 (2018-03-23)

** Bug fixes **

- Fix install

29.216 2.17.2 (2018-02-07)

Minor changes

- Use id rather than french name for practices and structure in sensitive areas API
- Add permission to import sensitive areas

29.217 2.17.1 (2018-02-02)

Minor changes

- Implantation year on signages and infrastructures is now a filter with current existing values
- Trek form field ‘practice’ is moved to first panel
- Add sensitive areas to public trek PDF
- Do not show paths on PDF
- Add SENSITIVE_AREA_INTERSECTION_MARGIN setting

Bug fixes

- Fix snapping
- Fix import of sensitive areas when languages lists do not match
- Fix trail links in project detail view
- Add ‘approved’ field in touristic content and event exports
- Fix service type with specials character in trek detail
- Fix bbox filtering in sensitive areas API
- Add CORS header to sensitive areas API
- Filter on spatial extent when importing from Biodiv’sport
- Fix celery task runner version

29.218 2.17.0 (2018-01-15)

New features

- Sensitive Areas

29.219 2.16.1 (2018-01-10)

Bug fixes

- Fix encoding errors while generating static versions of rando pages
- SEO for static versions of rando pages
- Disable template caching (fix ODT generation)

29.220 2.16.0 (2017-12-21)

New features

- Create static versions of rando pages with opengraph data (Facebook)
- Add external id field to POI form

Bug fixes

- Fix download of python packages for pypi.python.org (SSL is now required)
- API v2 : Fix full URL pictures in nested serializers
- Fix network SVG (add viewBox) to make them visible in Geotrek-rando
- Hide file parsers form if no one is available

29.221 2.15.2 (2017-09-28)

Bug fixes

- Fix existing path split in particular cases where postgis doesn't see real intersections.
- Fix project and intervention detail template.
- Fix synchronization of POI media other than images
- Include pois, parking and reference points to compute PDF map zoom

29.222 2.15.1 (2017-08-23)

New features

- Add es translation for PDF
- Add mailssl setting

Bug fixes

- Fix APIDAE import illustrations
- Fix double import parsers
- Fix cirkwi export
- Select only published POIs in GPX and KML files
- Remove deprecated experimental setting
- Fix HTML tags & entities in feedback email

29.223 2.15.0 (2017-07-13)

New features

- API v2 Beta 1. Optimized multilingual filtered endpoints for paths, treks, tours and pois.
- See HTML doc and examples in /api/v2/. Authentication with Basic HTTP (https://en.wikipedia.org/wiki/Basic_access_authentication).
- Don't use it in production without HTTPS

Bug fixes

- Fix pdf default public templates (weasyprint)
- Fix screamshotter standalone install (map screenshots)

29.224 2.14.3 (2017-07-03)

Bug fixes

- Cirkwi export fixes and improvements

29.225 2.14.2 (2017-06-21)

Bug fixes

- Fix attachments edition

29.226 2.14.1 (2017-06-22)

Bug fixes

- Refactor signals pre / post migrate according Django 1.8
- Update translations
- Fix path splitting
- Fix AutoLogin Middleware with mapentity 3.1.4

29.227 2.14.0

WARNING!

- Upgrade to version 2.14.0 is only possible from version 2.13.0

New features

- Upgrade to Django 1.8. This is a big step, migrations are reset, please backup before upgrade.
- Ability to skip attachment download in parsers and use external links.

Minor changes

- Possibility to exclude pois in cirkwi xml export by adding ?withoutpois=1 to url (<http://XXXXXX/api/cirkwi/circuits.xml?withoutpois=1>)
- Add MOBILE_TILES_EXTENSION setting (for compatibility with old mobile apps, set it to ‘png’)
- API optimization
- Disable auto size for service icon in trek description.

Bug fixes

- Fix topologies and cities intersections

29.228 2.13.0 (2017-03-02)

Minor changes

- MOBILE_TILES_URL settings is now a list which can be used to merge different layers in mobile application

29.229 2.12.0 (2017-02-16)

New features

- add loadsignage command

Minor changes

- add field implantation_year to model BaseInfrastructure
- add field owner to model LandEdge
- add field agreement to model LandEdge

29.230 2.11.5 (2017-02-06)

Bug fixes

- Fix topologies and cities intersections

29.231 2.11.4 (2017-02-01)

Bug fixes

- Remove deprecated datasource (replaced by import parsers)
- Stop install.sh if make update or wget fails
- Create database with right owner if user exists but database does not
- Make sure supervisor service is started after install
- Fix HTML entities in feedback email
- Fix cirkwi export for treks with multilinestring geom

Minor changes

- Add filter usages on paths
- Add filters name and description on infrastructures and signages
- Add picture to PDF for feedback reports (only in Weasyprint mode)

29.232 2.11.3 (2016-11-15)

Bug fixes

- Upgrade mapentity (fix map centering in PDF exports)
- Fix cirkwi export when trek geom is not a linestring

29.233 2.11.2 (2016-09-15)

Bug fixes

- Do not synchronize not-published treks with published but deleted parents
- Allow to specify portal in touristic content parsers
- Fix import of type1 in HebergementsSitraParser
- Fix source and portal missing in shapefile exports

Performances

- Improve performances of DEM computation for huge treks

29.234 2.11.1 (2016-08-17)

Minor changes

- Fix slug URL for “oe” ligature
- Improve zoom of map captures in PDF

29.235 2.11.0 (2016-08-02)

Bug fixes

- Fix weasyprint install
- Fix label displayed twice with Sitra Parser

Minor changes

- Update translations
- Update import documentation
- Record source is no more structure related

New features

- ability to filter synchronized content with different portals

29.236 2.10.4 (2016-05-19)

Breaking changes

- Deprecate MAPENTITY_WEASYPRINT setting. Now public PDF use Weasyprint HTML templates and private PDF use legacy ODT template.

Minor changes

- Improve altitude profile computation (increase smoothing)
- Improve HTML templates for public exports
- Improve SITRA parser
- Allow to use source variable in PDF templates

Bug fixes

- Fix comparison of zip files to keep mtime when nothing changed
- Upgrade simplekml lib (should fix KML exports)

29.237 2.10.3 (2016-05-11)

Minor changes

- Update default pictograms for touristic content categories
- Update default pictograms for themes

Bug fixes

- Workaround a bug in supervisor init script
- Fix multilinestring instead of linestring in trek shapefile parser

29.238 2.10.2 (2016-04-12)

Minor changes

- Add source filter to touristic contents/events
- Allow installation as root (not recommended, use with caution)

Bug fixes

- Restore contents deleted and then created again in EspritParcParser
- Add a warning if type1/type2 is not created in EspritParcParser
- Replace input by textarea in flatpage form

29.239 2.10.1 (2016-03-17)

Bug fixes

- Allow access to information desks in API (and so to map capture and PDF) for unpublished treks

Minor changes

- Parsers improvements

29.240 2.10.0 (2016-03-03)

New features

- Add support for Ubuntu 15.04 Vivid

Breaking changes

- Remove TileCache service (you should set up tiles source with LEAFLET_CONFIG variable in `geotrek/settings/custom.py` now)
- Run supervisor as root (you should now run `sudo supervisorctl` instead of `./bin/supervisor`)
- Move nginx and supervisor logs to system dir `/var/log/`

Minor changes

- Update default pictograms for difficulty levels

Bug fixes

- Fix sync_rando after deleting a trek with children

29.241 2.9.3 (2016-02-25)

Bug fixes

- Fix line break at start of contact in EspritParcParser

Minor changes

- Add parameters.json and themes.json files to API

29.242 2.9.2 (2016-02-17)

Minor changes

- Increase web link size

Bug fixes

- Fix path split
- Fix attachment parsing with same document type for several structures

29.243 2.9.1 (2016-02-10)

Bug fixes

- Don't forget to sync touristic contents/events media when skipping PDF
- Don't delete attachments of other objects when importing
- Don't delete other objects when constant fields are set in parsers

29.244 2.9.0 (2016-02-04)

New features

- Add parser for brand “Esprit Parc National”

Bug fixes

- Set user structure as related structure for all new objects

29.245 2.8.1 (2016-01-29)

Bug fixes

- Synchronize information desk thumbnails

29.246 2.8.0 (2016-01-28)

New features

- Use POI pictures in PDF if the trek has no picture itself
- Use a placeholder in PDF if there is no picture
- Parser to import touristic contents from SITRA
- Add list of all information desks to API

Bug fixes

- Allow NULL values for id_externe fields in database
- Fix missing elements (eg. POI enumeration) on trek map capture
- Prevent overlapping controls at bottom of list view
- Translation of column names in shapefiles export
- UTF-8 and truncated alerts in shapefile export

29.247 2.7.2 (2016-01-26)

Bug fixes

- Synchronize touristic events with no end date
- Fix PDF synchronization (eg. missing list of POI)

29.248 2.7.1 (2016-01-18)

Bug fixes

- Fix random z-index on forced layer polygon
- Fix pretty duration

29.249 2.7.0 (2016-01-14)

New features

- New button to add Youtube videos in flat pages

Bug fixes

- Fix iframe inclusion in flatpages.
- Fix double column buttons in gridmanager.
- Fix validation on flatpages for combo external_url + content.
- Fix responsive layout for provided templates in flatpages.
- Fix event link to closest visible path only
- Do not log anymore an error when submitting a form with an empty geometry

29.250 2.6.0 (2015-12-30)

New features

- Customization of practices ordering

Bug fixes

- Synchronize record source pictograms
- Add buttons to attachment update form
- Fix timestamps in database when connection with timezone other than UTC

29.251 2.5.2 (2015-12-29)

Bug fixes

- Fix hyphenation language in public PDF templates
- Add parents to trek public PDF template
- Fix numbering style in trek public PDF template
- Show points of reference over other features on trek detail map

29.252 2.5.1 (2015-12-18)

Bug fixes

- Trek public PDF fixes (size of service pictos, style of numbered lists, stages)

29.253 2.5.0 (2015-12-08)

New features

- Order has been added to flatpages which is reflected in the export for geotrek-rando frontend.
- Added 2 templates buttons for flatpages creating two layouts
- Option to add pois pictures to trek ones in Geotrek-Rando

Bug fixes

- Generate tiles zip files for all children of published treks
- Fix URL of video/audio media in API
- Fix default filtering of past touristic events in UI

29.254 2.4.4 (2015-12-02)

Bug fixes

- Show pending import/sync tasks

29.255 2.4.3 (2015-11-27)

Bug fixes

- Fix filtering by source in sync_rando for flatpages and tiles too

29.256 2.4.2 (2015-11-26)

Bug fixes

- Fix permissions of sync rando output directory
- Fix filtering by source in sync_rando

29.257 2.4.1 (2015-11-25)

Bug fixes

- Condition field of infrastructures is no more required
- Fix zipfile detection at import.
- Fix error handling at import (raise exception to browser).

29.258 2.4.0 (2015-11-18)

New features

- Paths can be merged
- Add trek parents to API
- Allow to sync public web site from web interface
- Add begin and end dates to touristic events list
- Filter completed touristic events by default

Bug fixes

- Prevent concurrent imports and/or synchronization
- Fix rendering of HTML markup in weasyprint templates
- Fix missing publication field in some cases

29.259 2.3.0 (2015-11-09)

New features

- Sync rando now synchronizes touristic contents and events.
- Sync rando now exports only future events based on current date.
- Sync rando now synchronizes touristic content categories.

Bug fixes

- Added a custom validation to accept url only contribution in flatpages without content.
- Sync rando now handles crashes when it calls django views.

29.260 2.2.0 (2015-10-09)

New features

- Added normalisation for altimetry's json export
- Clarify 2D/3D lengths (fixes #1400)

Bug fixes

- Change plural on accessibility label for admin filter

29.261 2.1.0 (2015-09-29)

Breaking changes

- Instead of storing the parent of a trek, Geotrek now stores the children of a trek. This allows to use the same trek in several parents and to order them. **WARNING!** Existing parent/child relation are lost. You will have to set them again after upgrade. Fixes #1479

New features

- Add trek infos (aka services for now)
- Add email sent to reporting user after submit
- Handle multiple reservation systems (fixes #1488)
- Add an option to sync_rando to filter by source (fixes #1480)
- Add add condition field to infrastructure table (fixes #1494)
- New Geotrek logo

Bug fixes

- Reload supervisor configuration after Geotrek upgrade
- Fix projection of waypoints in GPX exports
- Prevent unnecessary save for geom fields if they are not updated. This prevents triggering geom recalculation in postgres.
- Fix crash in case of missing or invalid picture
- Fix feedback API
- Unzip eggs to fix templates not found error
- Various parsers (import system) fixes and improvements

Documentation

- Document server migration

29.262 2.0.0 (2015-07-20)

Breaking changes

- Rework API URL schemas

New features

- Static API to disconnect Geotrek-rando from Geotrek-Admin (fixes #1428)
- Build zip files for mobile application
- Trek / Touristic content association distance depending on trek practice
- Option to hide published treks nearby topologies
- Add previous/next treks and category slugs to geojson API
- Add external id in trekking/tourism detail pages and exports
- Zip touristic contents as POI for mobile app v1
- Add external id field on Path

- Order intersections in Geotrek light mode
- Add reservation id field for touristic contents
- Integration of WeasyPrint to generate PDF from HTML/CSS instead of ODT

Bug fixes

- Remove HTTP calls to SoundCloud API at serialization
- Allow DEM to partially cover spatial extent

29.263 0.35.1 (2015-07-17)

Bug fixes

- Fix installation on ubuntu 12.04 with recent updates

29.264 0.35.0 (2015-07-10)

New features

- Add an import framework

Bug fixes

- Fix a crash in appy pod (PDF generation)
- Fix login with restricted access to some contents
- Fix buildout bootstrap arguments

29.265 0.34.0 (2015-05-20)

New features

- Itinerancy (parent/children treks)
- Allow to choose ordering of categories for Geotrek-Rando
- Bootstrap grid editor for flatpages
- Approved touristic contents and events
- Option to split trek category by practice or accessibility

Bug fixes

- Fix duration notation
- Flatten altimetry profiles

Bug fixes

- Show accessibility in trek detail page (fixes #1399)

29.266 0.33.4 (2015-04-07)

Bug fixes

- Ensure trek duration is a positive number
- Fix cirkwi exports (second try)
- Fix public PDF templates

29.267 0.33.3 (2015-04-01)

Bug fixes

- Fix systematic crash in PDF conversions

29.268 0.33.2 (2015-04-01)

Bug fixes

- Remove italian from fixtures
- Fix crash when generating two PDF in parallel

29.269 0.33.1 (2015-03-25)

Bug fixes

- Fix flat pages crash
- N to N source field (rel #1354)

29.270 0.33.0 (2015-03-25)

Breaking changes

- A new permission “Can publish ...” is required to publish treks, pois, touristic contents and touristic events.
Grant it to your users and groups if need be
- DB table l_b_source is renamed as l_b_source_troncon

New features

- Publication workflow (fixes #1018)
- Allow to add links to Youtube or Soundcloud media as attachment
- Make pictograms optional in some places when not required by Geotrek-Rando
- Add source for treks, touristic contents and touristic events (fixes #1354)
- Add external id field for treks, pois, touristic contents and touristic events
- Group cirkwi matchings in admin site (fixes #1402)

Bug fixes

- Fix projection of OSM link in feedback email
- Fix language in cirkwi exports

29.271 0.32.2 (2015-03-06)

Bug fixes

- Home now redirects to treks list in light version (without topologies)
- Fix Cirkwi export in light version
- Fix SRID in database migrations
- Add signage type filter again (fixes #1352)
- Add missing date filters to touristic events list

29.272 0.32.1 (2015-03-04)

Bug fixes

- Fix creation of a loop topology with two paths (fixes #1026)

29.273 0.32.0 (2015-03-04)

New features

- Export to cirkwi/espace loisirs IGN. After upgrade, run `bin/django loaddata cirkwi` to load data cirkwi tags and categories
- Wysiwyg editor for static web pages

Bug fixes

- Hide not published static pages in public REST API

29.274 0.31.0 (2015-03-02)

New features

- Add support of Ubuntu 14.04 to installer
- Public PDF for touristic contents/events (fixes #1206)
- Add treks close to other treks in REST API
- Add pictograms for trek accessibilities, touristic content types and touristic event types

Bug fixes

- Show edit button when having bypass structure permission
- Export missing fields in list exports (fixes #1167)
- Fix formating of float and boolean values in list exports (fixes #1366, #1380)

- Fix french translation
- Allow anonymous access to altimetry API for public objects
- Hide not published and deleted items in public REST API

29.275 0.30.0 (2015-02-19)

Breaking changes

- Trek practice (formerly usage) is no single valued so if a trek has multiple usages only one will be kept after upgrade. Others will be **lost!**
- After upgrade, run `make load_data` to load fixtures for accessibilities or create them by hand. You should clean-up the list of practices by hand.
- Don't forget to set up permissions to administrate practices and accessibilities.

New features

- Split trek usage field into practice and accessibility
- Treks and POIs are now structure related
- Allow anonymous access to media related to published items
- Check model read permission to give access to media
- Add a settings to set up CORS (cross-origin resource sharing)
- Allow to get POIs for a specific trek in REST API
- Consistent REST API (type1, type2, category for treks, touristic contents and touristic events)

Bug fixes

- Ensure path snapping is done on the closest point and is idempotent
- Fix language of PNG elevation charts
- Fix logo on login page
- Fix logs rotation
- Fix permissions creation

29.276 0.29.0 (2015-02-04)

New features

- GeoJSON API with all properties for Trek and Tourism

Bug fixes

- Fix permissions required to sync static Web pages
- Fix geom computation on line topologies with offset

29.277 0.28.8 (2014-12-22)

Bug fixes

- Fix altimetry sampling for segment with 0 length (rel #1337)

29.278 0.28.7 (2014-12-22)

Bug fixes

- Fix altimetry trigger when TREKKING_TOPOLOGY_ENABLED is set to False

29.279 0.28.6 (2014-12-18)

Bug fixes

- Fix 3D length shorter than 2D length (run sql command `UPDATE l_t_troncon SET geom=geom;` after upgrade to update altimetry informations of existing geometries)
- Fix translation of “Information desks” in public trek PDF
- Fix `prepare_map_images` and `prepare_elevation_charts` commands failing for deleted objects and for objects without geom

29.280 0.28.5 (2014-12-09)

Bug fixes

- Fix DEM optimizations when minimum elevation is zero (fixes #1291)
- Fix regression for translations of tourism (fixes #1315)
- Fix duplicate entries with year filter (fixes #1324)

Documentation

- French user manual first step about general interface

New features

- Set PostgreSQL search_path at user level (fixes #1311)
- Show 3D and 2D length in detail pages (fixes #1101)
- Show length and elevation infos in trail and all status detail pages (fixes #1222)
- Show trail length in list and exports (fixes #1282)
- Replace stake by length in path list (fixes #956, fixes #1281)
- Add subcontracting in intervention filter (fixes #1144)
- Add missing fields in project filter (fixes #219, fixes #910)
- Show status in interventions table among detail pages (fixes #1193)
- Add missing field in projects exports (ref #1167)
- Add length column to land module lists

- Number of workers and request timeout can be now configured in `settings.ini`
- Various improvements on trek public template, by Camille Monchicourt

29.281 0.28.4 (2014-11-21)

Bug fixes

- Fix mouse position indicator on `/tools/extents/` page when map tiles have Google projection
- Fix missing filters in trails list (fixes #1297)
- Fix infrastructure main type filter (fixes #1096)
- Fix flatpage creation without external url in adminsitem
- Fix path detail page where deleted objects were shown (fixes #1302)
- Fix position of POIs on trek detail maps (fixes #1209)
- Fix TinyMCE not preserving colors (fixes #1170)
- Raise validation error instead of crashing when submitted topology is empty (fixes #1272)

Documentation

- Fix mention of MAP_STYLES (ref #1226)

Changes in experimental features

- Renamed *usage* to *type* in touristic events (fixes #1289)

29.282 0.28.3 (2014-11-12)

Bug fixes

- Fix upload form author/legend format (fixes #1293)
- Fixes history list (ref #1276)
- Prevent email to be sent twice on conversion error. Use info instead.
- Fix paperclip translations missing (fixes #1294)
- Fix filetypes not being filtered by structure (fixes #1292)
- Fix appearance of multiple-choices in forms (fixes #1295)

29.283 0.28.2 (2014-11-05)

Bug fixes

- Fix upgrade of django-leaflet to 0.15.0 (overlay layers)
- Fix appearance of overlay layers for tourism when experimental features are disabled
- Fix plural in tourism translation
- Fix unit tests

- Run this command to set the default information desk type with the original pictogram (or select a pictogram from the adminsitem)

```
cd Geotrek-0.28.2/
curl "https://raw.githubusercontent.com/makinacorpus/Geotrek/v0.27.2/geotrek/trekking/
˓→static/trekking/information_desk.svg" > var/media/upload/desktype-info.svg
```

29.284 0.28.1 (2014-11-05)

Bug fixes

- Fix deployment when tourism is not enabled
- Fix default duration when invalid value is filled (fixes #1279)
- Fix year filters for intervention, infrastructure and project (fixes #1287)
- Fix list filters not being restored (fixes #1236)

29.285 0.28.0 (2014-11-04)

Breaking changes

- Before running install, run this SQL command to add a column for file attachments :

```
ALTER TABLE f1_t_fichier ADD COLUMN marque boolean DEFAULT false;
```

New features

- Information desks now have a type (*Maison du parc, Tourist office, ...*) with the ability to set dedicated pictograms (fixes #1192).
- Ability to control which picture will be used in trek, using clicks on stars in attachments list (fixes #1117)
- Ability to edit attachments from detail pages directly (fixes #177, the 5th oldest issue!)
- Add missing columns in intervention exports (fixes #1167)
- Add ability (for super-admin) to add/change/delete zoning objects in Adminsite (ref #1246)
- Add ability to have paths records in database that will not appear in Geotrek lists and maps. Just set column `visible` to false in `l_t_troncon` table.
- Add ability to add external overlay tile layers (fixes #1203)

Bug fixes

- Fix position of attachment upload form on small screens
- Clearer action message in object history table
- Prevent image ratio warning from disappearing (fixes #1225)
- Touristic contents
- Touristic events

Internal changes

- Upgraded Chosen library for dropdown form fields
- Set `valide` column default value to false on paths table `l_t_troncon` (fixes #1217)
- All information desks are now available in GeoJSON (*will be useful to show them all at once on Geotrek-rando*).
- All tables and functions are now stored in different schemas. It allows to distinguish Geotrek objects from `postgreSQL` and `PostGIS`, and to grant user privileges by schema. It is also easier to browse objects in `pgAdmin` and `QGis`.

Caution: if you created additional database users, you may have to change their `search_path` and/or their `USAGE` privilege.

Experimental features

- We introduced models for touristic contents and events. In order to load example values for categories and types, run the following commands:

```
bin/django loaddata geotrek/tourism/fixtures/basic.json  
cp geotrek/tourism/fixtures/upload/* var/media/upload/
```

- We introduced models for static pages, allowing edition of public static Web pages from Geotrek adminsite.

In order to enable those features under construction, add `experimental = True` in `etc/settings.ini`. Note that none of them are used in *Geotrek-rando* yet.

notes

Give related permissions to the managers group in order to allow edition (`add_flatpage`, `change_flatpage`, `delete_flatpage`, `add_touristiccontent` ...).

29.286 0.27.2 (2010-10-14)

Bug fixes

- Fix elevation info not being computed when intervention is created (ref #1221)
- Fix list of values for infrastructure and signage types (fixes #1223)
- Signages can now be lines if setting `SIGNAGE_LINE_ENABLED` is True (fixes #1141)
- Fix HTML tags in PDF exports (fixes #1235)
- Fix regression with Geotrek light

29.287 0.27.1 (2010-10-13)

Bug fixes

- Fix problems in forms, prevent Javascript errors

29.288 0.27.0 (2010-10-09)

Breaking changes

- Attribute for single information desk was removed (was used in **Geotrek-rando** < 1.29)
- Renamed setting TREK_PUBLISHED_BY_LANG to PUBLISHED_BY_LANG
- Renamed setting TREK_EXPORT_MAP_IMAGE_SIZE to EXPORT_MAP_IMAGE_SIZE, TREK_EXPORT_HEADER_IMAGE_SIZE to EXPORT_HEADER_IMAGE_SIZE and TREK_COMPLETENESS_FIELDS to COMPLETENESS_FIELDS. They are now a dictionary by object type (see [example](#))

New features

- POI publication is now controlled like treks
- POI now have a public PDF too
- Introduced VIEWPORT_MARGIN setting to control list page viewport margin around spatial extent from `settings.ini` (default: 0.1 degree)

notes

After upgrading, mark all POIs as published in the languages of your choice

```
UPDATE o_t_poi SET public_fr = TRUE;
UPDATE o_t_poi SET date_publication = now();
```

Bug fixes

- Add missing credit for main picture in trek PDF (fixes #1178)
- Paths module is now removed from user interface in *Geotrek-light* mode. (i.e. with `TREKKING_TOPOLOGY_ENABLED = False`)
- Make sure text fields are cleared (fixes #1207)
- Intervention subcontracting was missing in detail pages (fixes #1201)
- Make sure TLS is disabled when `mailtls` is False in settings
- Fix list of POIs in path detail pages (fixes #1213)
- Fix highlight from map for project list page (fixes #1180)

Internal changes

- Extracted the trek publication to a generic and reusable notion
- Complete refactor of Trek JSON API, now taking advantage of Django REST framework instead of custom code
- Added read/write REST API on all entities
- Refactored URLs declaration for altimetry and publishable entities
- Change editable status of topology paths in Django forms, since it was posing problems with Django-rest-framework
- Add elevation profile SVG URL in trek detail JSON (fixes #1205)
- Simplified upgrade commands for `etc/` and `var/`, and mention advanced configuration file

29.289 0.26.3 (2014-09-15)

Bug fixes

- Fix pretty trek duration when duration is between 24 and 48H (fixes #1188)
- Invalidate projet maps captures when interventions change, and treks maps when POIs change (fixes #1181)

29.290 0.26.2 (2014-08-22)

Bug fixes

- Fix search among attached files in Adminsite (fixes #1172)

29.291 0.26.1 (2014-08-21)

Bug fixes

- Upgrade *django-mapentity* for bug fix in ODT export and list of values in detail pages

29.292 0.26.0 (2014-08-21)

New features

- Interventions in project detail page is now shown as a simple table (ref #214)
- A generic system for interaction between objects attributes and details map was developped. It works with project interactions, topologies paths, etc. (ref #214)
- Show enumeration of interventions in project PDF exports (fixes #960)
- Number of POIs in now limited to 14 items in trek export (ref #1120)
- Number of information desks in now limited to 2 items in trek export (ref #1120). See settings TREK_EXPORT_INFORMATION_DESK_LIST_LIMIT and TREK_EXPORT_POI_LIST_LIMIT
- Justify texts of POIs in trek export, now converted to plain text.
- Trek export geometries are now translucent red by default (see MAP_STYLES setting) (ref #1120)
- Paths appearance in trek exports are now controlled by MAP_STYLES setting too.
- Images attachments are now resized to 800x800 for publication (instead of 500x500)
- Clarify intervention cost by function and mandays (fixes #1169)

Bug fixes

- Fix paths layer not being shown in detail pages (fixes #1161)
- Fix position of point topologies when closest path is not perpendicular (fixes #1156)
- Prevent parking to be cropped on map exports (fixes #1006)

Upgrades notes

Since the map export have changed, empty the cache :

```
rm -rf var/media/maps/*
```

29.293 0.25.2 (2014-08-14)

Bug fixes

- Fix translation of Job in intervention form (fixes #1090)
- Fix form error when no geometry is provided (fixes #1082)
- Show attachments in adminsitem (fixes #1162)
- Fix JSON formatting of object attachment lists in API

29.294 0.25.1 (2014-08-01)

Bug fixes

- Fix Geotrek CSS not being deployed properly
- Fix trek relationships causing errors for PDF export

29.295 0.25.0 (2014-08-01)

New features

- Added projection file EPSG:32622 (fixes #1150)
- Now log addition and suppression of attachments in history
- Added notion of points of reference for treks (fixes #1105). (Can be disabled with TREK_POINTS_OF_REFERENCE_ENABLED = False)
- Edit the parking location directly on the trek map (ref #387)
- Show enumeration of POIs in trek PDF exports (fixes #871)

BUG fixes

- Fix permission check to see attachments (fixes #1147, ref #1146)
- Fix grouping of interventions in detail pages (fixes #1145)
- Fix project total intervention cost (fixes #958)
- Fix history entries not being saved when using formsets (fixes #1139)
- Fix postal code being saved as integer (fixes #1138). Existing records will have a leading zero when shorter than 5 characters.
- Fix bug when form of intervention on infrastructure is not valid
- Limit height of layer switcher on small screens (fixes #1136)
- Get rid of next parameter when redirecting to login when permission missing (fixes #1142)
- Fix appearance of main menu when permissions are missing to view logbook and admin (ref #1142)

Internal changes

- Rework display of lists in detail pages, better factorization
- Removed links in logbook list for certain models
- Display messages in login page too (useful for redirections)

Support edition of several fields on the same map, via django-leaflet new feature (fixes #53)

29.296 0.24.3 (2014-06-27)

BUG fixes

- Fix cursor not removed when terminating topology (fixes #1134)
- Fix information desk geometry hard-coded SRID

29.297 0.24.2 (2014-06-27)

BUG fixes

- Fix EPSG:32620 projection file
- Fix JS error when path layer is not on map
- Fix start and end markers not shown as snapped on path edition (fixes #1116)
- Fix groups not shown in Adminsite with external authent (fixes #1118)
- Use markers as mouse icons for topology creation, use resize cursors as fallback only (fixes #1100)
- Minor changes in trek print template (ref #1120)

29.298 0.24.1 (2014-06-26)

BUG fixes

- Fix SVG files for difficulty pictograms
- Fix group fixtures for “Rédacteurs” (fixes #1128)
- Fix tab “None” in list view (fixes #1127)
- Fix external datasources icons in Admin (fixes #1132)
- Fix information desk maps in Admin forms (fixes #1130)
- Fix topology edition when two forced passages on same path (fixes #1131)

Minor changes

- Ordered log entries by date descending (ref #1123)
- Renamed “Data sources” by “External data sources” (fixes #1125)
- Renamed “Foncier” to “Statuts” (fixes #1126)

29.299 0.24.0 (2014-06-23)

** Breaking changes **

- POI icons shall now have a solid background, since no background is added in trek detail map anymore.
- Pictograms fields were added to trek difficulty, route, network. You can use the images provided in the `trekking/fixtures/upload/` folder.

notes

Just before upgrading, delete the following folders

```
rm -rf lib/src/django-modeltranslation
```

After upgrading, mark all treks as published in the languages of your choice

```
UPDATE o_t_itineraire SET public_fr = TRUE;
UPDATE o_t_itineraire SET date_publication = now();
```

New features

- Public TREK export - hide block label if value is empty (fixes #873)
- Add POIs on trek GPX (fixes #774)
- Close list filter when click outside (fixes #916)
- Rename recurrent field to subcontracting on intervention (fixes #911)
- Rename comments field to description on intervention (fixes #927)
- Show object type in ODT export (fixes #1000)
- Show paths extremities on map (fixes #355)
- Ability to reuse topology when adding objects from detail pages (fixes #574, fixes #998)
- Command to generate all elevation charts (fixes #799)
- SITRA support in Tourism datasources (fixes #1064)
- Added status field on feedback reports (fixes #1075)
- Show restricted areas by type in layer switcher (fixes #961)
- Publication status is now controlled by language (fixes #1003). Previous behaviour can be restored by setting `TREK_PUBLISHED_BY_LANG`` to False.
- Added publication date on trek (ref #1003)
- Ability to see a trek in the different published languages (ref #1003)
- A trek can now have several information desks (fixes #1001)
- Information desks are now shown in trek detail map (fixes #1001)
- Information desks now have optional photo and position, as well as some additional fields (fixes #1001)
- Disabled marker cluster in trek detail map
- Remove background and halo effect on POI icons
- Added 3 new settings to control trek detail map icons size (`TREK_ICON_SIZE_POI`, `TREK_ICON_SIZE_PARKING`, `TREK_ICON_SIZE_INFORMATION_DESK`)

Minor features

- Intervention disorders is not mandatory anymore (fixes #661)
- Improved details in trek form, use Chosen for many-to-many widgets
- Documented the configuration of map layers appearance
- Show layers colors in layer switcher
- Detail page : replace “Maintenance” by “Works” (fixes #889)
- Detail page : interventions on paths are now grouped together, and a small icon is shown (fixes #735)
- Detail page : show intervention costs (ref #958, fixes #764)
- Show project intervention total costs (fixes #958)
- Allow to override the Trek public document template (see *advanced configuration* in docs)
- Close calendar after date choice in intervention form (fixes #928)
- Renamed Attachment submit button (fixes #925)
- Added a new setting PATH_SNAPPING_DISTANCE to control paths snapping distance in database (default: 1m)
- Allow to disable trails notion (fixes #997) (see *advanced configuration* in docs)
- Show POI name on hover instead of category in trek detail pages (fixes #1004)
- Form tabs are now always visible while scrolling (fixes #926)
- New URL to obtain the attached filelist of an object
- Remove float notation in altimetry altitude labels
- Control altimetry profiles font using ALTIMETRIC_PROFILE_FONT setting
- Add pictograms to routes and networks (fixes #1102)

Bug fixes

- Fixed Signage and Infrastructure year filter label (fixes #293)
- Fixed paths layers not always shown below other layers (fixes #912)
- Clarify legend and title for attachments (fixes #888)
- Fixed cannot clear trek fields in database (fixes #1095)
- Fixed missing translation of “Load local file” (fixes #1085)
- POI types are displayed as such in adminsite
- Fix duplicate authors in history list in detail pages

Internal changes

- Added pictogram on difficulty, useful for *Geotrek-mobile* (fixes #1109)
- Added experimental *Geotrek-light* support (ref #1019)

29.300 0.23.5 (2014-06-19)

Bug fixes

- Fix crash when TourInFrance has malformed website or phone
- Fix translations not being installed

29.301 0.23.4 (2014-06-18)

Bug fixes

- Fix massive upgrade bug, where new migrations were ignored. Due to migration operation introduction in 0.22 installation script.

Special thanks to Noël Martinon, Félix Merzeau, Gil Deluermoz and Camille Montchicourt for their patience on this.

29.302 0.23.3 (2014-06-18)

** Bug fixes **

- Fix static files compression when using Google Mercator projection in maps
- Fix intermediary points order in topology de/serialization, and remove useless topology serialization optimizations (fixes #1031)

29.303 0.23.2 (2014-06-13)

** Bug fixes **

- Fixed land records not shown in detail pages
- Fixed JSON DEM area extent for treks
- Fixed targets list for tourism datasources (fixes #1091)
- Cache tourism datasources for one day (setting CACHE_TIMEOUT_TOURISM_DATASOURCES)
- Fix crashes with TourInFrance sources
- Add link to OSM in feedback email (fixes #1089, #1093)
- Fix feedback email translation (fixes #1087)
- Fix problem with permission check “read attachment” in detail page (fixes #1092)
- Fix measure control appearing twice in forms (fixes #1078)
- Fix 404 on download buttons from list views
- Fix POI translated fields not tabbed (fixes #1065)
- Fix missing translation of “Add a new POI” (fixes #1086)
- Fix invalid snapping when save path without editing geometry (fixes #1099)
- Add missing properties in feedback report detail page.
- Hide all modules information in report detail page.

- Add missing translations of feedback module.
- Show object type in ODT export (fixes #1000)

** Internal changes **

- Upgraded to Mapentity 1.4.0
- Upgraded to Leaflet 0.7.3

** Installation **

- Fixed content types migration of land to zoning apps (Thanks Noël Martinon)
- UbuntuGIS stable maintainers have *upgraded* (sic) GDAL to 1.10.0. Upgrading GDAL is painful, and PostGIS packages may have to be reinstalled (data shouldn't be lost though). *Remember it was recommended to run PostGIS on a different server.*

notes

On June 2th 2014, the Ubuntu GIS stable repository switched from libgdal1 to libgdal1h. It broke the deployment script of many projects, including *Geotrek*.

It is a good thing, since it paves the way for the last Ubuntu LTS release (14.04). However, it breaks the *Long Term Support* philosophy of the previous one (12.04), supposed to be supported until 2019.

Morality : we cannot trust the *Ubuntu GIS stable* repository anymore.

Regarding *Geotrek*, such upgrades of Ubuntu packages is not supposed to be covered by its installation script. If you face any problems, please refer to the community or commercial support (such as *Makina Corpus* for example).

29.304 0.23.1 (2014-05-22)

** Bug fixes **

- Fixed regression when editing topologies without modification
- Fixed widget for Trails to allow linear topologies only

29.305 0.23 (2014-05-22)

** Breaking changes **

Read all release notes carefully.

- Trails are now managed as topologies (fixes #370). Existing trails geometries are likely to be **LOST** (*see below*)
- Rename `mailadmin` to `mailadmins` in `etc/settings.ini`
- Permission systems has been refactored (*see below*)

** Bug fixes **

- Force browser cache revalidation of geojson data (fixes #843)
- Force browser cache revalidation for path graph (fixes #1029)
- Fix deletion porblems in AdminSite (fixes #1008)
- Trek advised parking and public transport are translatable (fixes #1024)
- Fix missing translation “no filters” and “current criterias” (fixes #884)

- Fix PDF versions of documents not being translated (fixes #1028)

**** New features ****

- Command to import shapefile with points into POI as topologies (fixes #952)
- Add views to serve DEM on object area as JSON (*Geotrek-Rando 3D*)
- New tourism module : external datasources can be configured from Adminsite (*GeoJSON*, *TourInFrance*, ...) and added to maps (by module, or published on *Geotrek-rando...*)
- Show number of attached files in tab (fixes #743)
- New permission to control download of attachments
- New permission to allow users or groups to bypass structure restrictions
- Add a setting to serve attached files as download (default: True) (fixes #976)
- Track objects creations, changes and deletions (fixes #300)
- Added a reader group (fixes #495)
- Topologies are not recreated if user did not edit field (fixes #833)
- Added static file for projection EPSG:32620
- Show land objects in menu (fixes #942)
- Documented configuration of custom projections (fixes #1037)
- Buttons in the list menu to add new objects easily
- Add fullscreen button on maps (fixes #904)
- Add all controls on detail map (fixes #907)
- Add a button to close filters (fixes #424)
- Added new sections in documentation : *FAQ*, *User-manual* and *Advanced configuration*

**** Internal changes ****

- Enabled database connection pooling in production
- An error is raised if SRID has not unit in meters (fixes #921)
- Zoning and land modules are now splitted (fixes #954)
- Complete refactor of geographical form fields. Now uses *django-mapentity* from its own repository instead of internal orphan branch.
- Complete refactor of maps initialization, without inline preprocessed JavaScript
- Rely on Django permissions to control access to detail, list and exports (fixes #675)
- Core and altimetry modules are now splitted (fixes #996)
- Renamed treks POIs GeoJSON properties

notes

- Before upgrading, backup your trail records and geometries, using pgAdmin

```
CREATE TABLE backup_sentiers AS SELECT * FROM l_v_sentier;
CREATE TABLE backup_troncons_sentiers AS (
    SELECT l_t_troncon.id AS troncon, l_t_sentier.id, l_t_sentier.nom
    FROM l_t_troncon, l_t_sentier
```

(continues on next page)

(continued from previous page)

```
WHERE l_t_sentier.id = l_t_troncon.sentier  
);
```

- Before upgrade, rename `mailadmin` to `mailadmins` and add a new line `mailmanagers` in `etc/settings.ini`. See *Email settings* section in documentation.
- Just before upgrading, delete the following folders

```
rm -rf lib/src/django-modeltranslation lib/src/mapentity
```

notes

- After upgrading, load the default permissions of the previous groups, otherwise users won't have access to their modules

```
bin/django loaddata geotrek/authent/fixtures/minimal.json  
bin/django loaddata geotrek/authent/fixtures/basic.json
```

- After upgrading, make sure *Active* is checked for the user `_internal_` otherwise screenshotting won't work.
- After upgrading, load basic data for the new module

```
bin/django loaddata geotrek/feedback/fixtures/basic.json
```

- After upgrading, make sure the user specified in *Geotrek-rando* is in the group *Geotrek-rando*, or has at least the following permissions in the AdminSite :
 - `paperclip` | `attachment` | Can read attachments
 - `trekking` | `Trek` | Can read Trek
 - `trekking` | `Trek` | Can export Trek
 - `trekking` | `POI` | Can read POI
 - `trekking` | `POI` | Can export POI
 - `feedback` | `Report` | Can add report
- After upgrading, compare visually the resulting migrated trails using QGis, by opening both layers `l_v_sentier` and `backup_sentiers`.

29.306 0.22.6 (2014-04-27)

- Remove hard-coded mentions of EPSG:2154 in database initial migrations (fixes #1020)
- Fix version download and unzip in installation script.

Thanks Noël Martinon, from Guadeloupe National Park, for reporting both issues.

29.307 0.22.5 (2014-03-19)

- Fix compilation of translations (ref #970)
- Fix distinction between languages and translated languages (fixes #968)
- Fix history tabs not being shown after upgrade to Django 1.6 (fixes #975)
- Fix regression on land layer label colors (fixes #980)
- Fix attached files not shown after file upload/delete (fixes #933)
- Fix links being removed from trek descriptions (fixes #981)
- Fix missing thumbnail in trek and POI detail pages
- Fix black background on map captures (fixes #979)
- Increased scale text size on map captures (fixes #850)
- Show map attributions on map captures (fixes #852)
- Fix aspect ratios of map in trek public documents (fixes #849)
- Fix objects list not being filtered on map extent (fixes #982)
- Fix coherence of map layer when text search in objects list (fixes #702)
- Fix number of results not refresh on text search (fixes #865)
- Added north arrow in map image exports (fixes #851)
- Removed darker effect on backgrounds for map image exports, and added internal advanced setting `MAPENTITY_CONFIG['MAP_BACKGROUND_FOGGED'] = True`

29.308 0.22.4 (2014-03-06)

- Fix install.sh not compiling locale messages (fixes #965)
- Moved trek completeness fields to setting `TREK_COMPLETENESS_FIELDS`. Duration and difficulty were added, arrival was removed (fixes #967)
- Fix regression about source locale messages (fixes #970)
- Fix regression link *Back to application* lost from adminsite (fixes #971)
- Serve uploaded files as attachments (fixes #972)
- Remove help texts being shown from filter forms (fixes #966)
- Fix form pills for translated languages (fixes #968)

29.309 0.22.3 (2014-02-17)

- Fix install.sh help not being shown
- Fix screenshots being empty if deployed behind reverse proxy with root url (fixes #687)
- Fix GPX file layer circle marker size (fixes #930)
- Remove JS libraries from login page
- Fix install.log being removed during installation
- Fix execution characters being shown during DB backup prompt
- Fix PhantomJS and CasperJS installation and deployment
- Added more automatic frontend tests
- Default allowed hosts is now *

29.310 0.22.2 (2014-02-14)

- Fix secured media URLs when using a non empty *rooturl* setting
- Fix proxy errors by disabling keep-alive (fixes #906)

29.311 0.22.1 (2014-02-13)

- Prevent install script to delete existing media files from disk in some situations.

29.312 0.22 (2014-02-12)

Before upgrade

- Backup your database.
- If you upgrade in the same application folder, first delete the *geotrek* sub-folder.
- Use *install.sh* to upgrade (*make deploy* won't be enough)
- After upgrade, make sure the following query returns only ~23 results:

```
SELECT COUNT(*) FROM south_migrationhistory;
```

BREAKING changes

- For upgrades, Geotrek 0.21 is required.
- Uploaded files are now restricted to authenticated users (fixes #729)

notes

Geotrek-rando 1.23 or higher is required to synchronize content.

NEW features

- In list view, click on map brings to detail page, mouse over highlights in list.
- Show path icon if intervention is not on infrastructure (fixes #909)

- Add spanish translation
- Add photographie into default attachments filetype
- Map location combobox (Cities, Districts, Areas) are not shown if empty or disabled.
- Several database views have been created (fixes #934)
- Remove dots from path icon (fixes #939)
- Intervention, infrastructure and project filters list of years is now dynamic (fixes #948)
- Application available languages (*english, french, italian, spanish*) are now distinct from translated content languages (*languages* value in `settings.ini`)

Minor changes

- Improved appearance of map controls
- Improved appearance of path intermediary points
- Improved appearance of form validation buttons
- Add auto-generated docs at `/admin/doc/`
- Nicer installation script output

Installation script

- Scan and ortho attributions can now be set using `scan_attributions` and
- Propose to backup DB before Geotrek upgrade (fixes #804)
- Settings edition prompt only happens at first install `ortho_attributions` in `settings.ini`.

BUG fixes

- Fix convert urls behind reverse proxy with prefix
- Fix deployment problem if `layercolor_others` not overridden in `settings.ini`
- Fix topology kinds to be ‘INTERVENTION’ for intervention without signage/infrastructure
- Fix restricted areas types display in admin (fixes #943)
- Fix list ordering of trek relationships and web links (fixes #929)
- Fix nginx log files being already empty after logrotate (fixes #932)
- Fix project add button when no permission

notes

List of restricted areas is not shown on map by default anymore. Restore previous behaviour with advanced setting `LAND_BBOX AREAS ENABLED` as True.

Internal changes

- Upgrade to Django 1.6 (fixes #938)
- Upgrade to Leaflet 0.7
- Upgrade a great number to python and JavaScript libraries
- An internal user (with login permission) is used to authenticate the Conversion and Capture services.
- Installation script is modular (standalone, geotrek only, ...)
- Developement server now listens on all interfaces by default

- Database migrations were resetted, no postgres *FATAL ERROR* message will be emitted on fresh install anymore (fixes #937). See *Troubleshooting* in documentation.

29.313 0.21.2 (2014-02-04)

BUG fixes

- Warn on tiling landscape/portrait spatial extent only if map with local projection
- Safety check on thumbnailing if images are missing from disk (*useful for troubleshooting, when importing existing dumps*).
- Fix overlapping filter if no records present (fixes #931)

29.314 0.21.1 (2013-12-11)

Improvements

- Smooth DEM drapping, improving altimetric information and profiles (fixes #840, ref #776)

BUG fixes

- Signage forms are now restricted by structure (fixes #917)
- Fix geometries computation when path split occurs on return topology (fixes #899)
- Add title on links in list views (fixes #913)
- Prevent horizontal scroll on forms, caused by textareas (fixes #914)
- Fix empty 3d geometry of point topologies with offset (fixes #918)

notes

In order to recompute all paths topologies altimetry information, you can perform the following queries:

```
UPDATE l_t_troncon SET geom = geom;           UPDATE e_t_evenement SET  
decallage = decallage;
```

Reading information from rasters is costly. Be prepared to wait for a while.

29.315 0.21 (2013-11-28)

Improvements

- Increase height of multiple select (fixes #891)
- Add project field in intervention filter (fixes #896)
- Many minor improvements for infrastructures in adminsite (fixes #886)
- Add category in intervention filter (fixes #887)

BUG fixes

- Fix KML coordinates not being in 3D.
- GPX now has trek description (fixes #775)

- Order overlapping topologies by order of progression (fixes #777)
- Improved TinyMCE configuration, for resize and cleanup (fixes #351, #711)
- Changed trek duration interval for notion of days (fixes #880)
- Show city departure in trek public export (fixes #881)
- Document customization of TinyMCE config (fixes #882)
- Fix 404 error on path delete (fixes #900)
- Fix project constraints not being displayed in details (fixes #893)
- Fix organism translation in project form (fixes #892)
- Fix appearance of forms on small screen (fixes #744, #902)
- Fix modify button being hidden to editors (fixes #901)
- Fix overlap between map controls and label (fixes #883)
- Fix translation of district in list filters (fixes #890)
- Fix integrity error on land intersection on path update (fixes #897)
- Fix form layout problems (fixes #712, #879)

29.316 0.20.9 (2013-10-30)

- Fix altimetric profile if topology geometry is wrong (fixes #875)
- Fix appearance of creation button in intervention list (fixes #877)
- Fix topology geometries that were sampled like paths 3D geometry (fixes #878)
- Fix topology lines geometries join in some situations (ref #722)
- Fix topology not well displayed if start/end on intersection (fixes #874)

29.317 0.20.8 (2013-10-22)

- Public trek export : Fix various layout regressions (ref #848)
- Public trek export : Show POI theme pictogram (fixes #858)
- Public trek export : full width for information desk frame (fixes #856)
- Public trek export : add footer with trek title and page numbers (fixes #861)
- Public trek export : add floating picture in POI detail (fixes #860)
- Public trek export : fix POI thumbnails missing (fixes #869)
- Fix point offset lost on path update (fixes #867)
- Fix reconnect point topologies with offset to closest path (fixes #868)

29.318 0.20.7 (2013-10-16)

- Fix topology geometry 3D being draped twice (fixes #863)
- Altimetric profile : Show max distance and round values (fixes #853)
- Altimetric profile : Add settings for colors (fixes #854)
- Public trek export : POIs list in two columns (fixes #855)
- Public trek export : POIs details without column break (fixes #857)
- Public trek export : Show pictures attributions (fixes #859)
- Public trek export : Use 10pt fonts in every text blocks (fixes #848)

notes

```
# Empty profiles cache rm -rf var/media/profiles/*
```

29.319 0.20.6 (2013-10-14)

- Remove 3D from JS WKT serializer
- Safety check if path is less than 1m
- Remove mentions of 2154 projection in schema migrations
- Fix performance issues in altimetric JSON (fixes #845)
- Fix filter forms missing from Trek and POI lists (fixes #847)
- Fix empty Nginx log files (fixes #846)

29.320 0.20.5 (2013-10-09)

- Fix migration of draping utility function

29.321 0.20.4 (2013-10-09)

- Fix sort stake by id (level) (fixes #835)
- Rename stake to maintenance stake (fixes #834)
- Add validity to path filter (fixes #836)
- Do not redrape topology geometries, use path 3D geometry (fixes #832)
- Fix document export of Trail objects (fixes #839)
- Fix trail helpers for land layers (fixes #838, ref #842)
- Fix install on fresh folder, missing folder lib/src (fixes #844)

29.322 0.20.3 (2013-09-30)

BUG fixes

- Fix typo in french translation of Properties (fixes #815)
- Fix missing description from infrastructure/signage detail page (fixes #816)
- Fix Cities / Districts / Restricted Areas in project detail page (fixes #817)
- Fix only deleted topology can have geom = NULL (fixes #818)
- Fix geometries not editable in QGis by switching path and topologies geometries to 2D (fixes #688)
- Fix altimetric sampling precision setting not taken in account in SQL (ref #776)

29.323 0.20.2 (2013-08-27)

- Fix convert urls behind reverse proxy with prefix
- Fix Trek public print conversion
- Fix display of trek length in public document (one decimal only)
- Fix altimetric graph delaying map display in detail pages

notes

Empty maps captures cache rm -rf var/media/maps/trek-*

29.324 0.20.1 (2013-08-26)

- Add DB index for start and end columns
- Merge gunicorn logs with respective applications logs
- Lower logging level in production (WARNING -> INFO)

BUG fixes

- Fix deployment error with application's TITLE
- Fix deployment errors with mandatory external authent values
- Fix trek export layout: fit map image and altimetric profile in one page.

29.325 0.20 (2013-08-23)

- Edit difficulty id in Admin site, mainly used to order difficulty levels (fixes #771)
- Use explicit list of fields in forms, instead of excluding model fields (fixes #736). Issue #712 was closed too, since most suspected cause was field listings. Please re-open if problem re-appears.
- Fix timeout on POI Shapefile and CSV exports (fixes #672)
- Altimetric profiles are now computed in PostGIS (fixes #778, #779)
- Positive and negative ascents are now computed using more DEM resolution (fixes #776)

notes

Setting PROFILE_MAXSIZE was replaced by ALTIMETRIC_PROFILE_PRECISION which controls sampling precision in meters (default: 20 meters)

- Altimetric profiles were removed from object map images
- Altimetric profiles are now plotted using SVG
- Altimetric profiles are now inserted into path documents and trek public printouts (ref #626)
- Fix deletion of associated interventions when editing infrastructures (fixes #783)
- Latest record is updated (*touch*) when a DELETE is performed on table (refreshes cache) (fixes #698)
- Reworked settings mechanism to follow Django best practices

notes

Replace all computed values from `etc/settings.ini`. For example, replace “60 * 60” by 3600.
(You can increase this value to several hours by the way)

- Allow server host to capture pages (fixes #733)
- Adjust map capture according to geometry aspect ratio (fixes #627)
- Always show path layer in detail pages (fixes #781)
- Fix restore of topology on loop paths (fixes #760)
- Fix topology construction when loop is formed by two convergent paths (fixes #768)
- Added small tool page at `/tools/extents/` to visualize configured extents (ref #732)
- Removed setting `spatial_extent_wgs84`, now computed automatically from `spatial_extent`, with a padding of 10%.

notes

Have a look at `conf/settings.ini.sample` to clean-up unnecessary values from your settings file.

- Fix paths offset for portrait spatial extent (fixes #732)
- Rely on Tilecache default max resolution formulae (fixes #732)
- Due to bug in Leaflet/Proj4Leaflet (<https://github.com/kartena/Proj4Leaflet/issues/37>) landscape spatial extents are not supported. Please adjust `spatial_extent` to be a portrait or square, or application will raise *ImproperlyConfiguredError*.
- Reload map objects on zoom out too (fixes #435)
- Fix computation of `min_elevation` for point topologies (fixes #808)

notes

In order to recompute all paths topologies altimetry information, you can perform the following query: `UPDATE e_t_evenement SET decallage = decallage;;`. Reading information from rasters is costly. Be prepared to wait for a while.

29.326 0.19.1 (2013-07-15)

- Restore pk property in Trek GeoJSON layer

29.327 0.19 (2013-07-12)

- Intervention length field (readonly if geometry is line)
- Fix apparence bug if no rights to add treks and pois (fixes #713)
- Fix extremities snapping (fixes #718)
- Show information desk in trek detail page (fixes #719)
- Fix topology adjustments after path split (fixes #720)
- On edition show global line orientation instead of individual paths (fixes #679)
- Fix invalid topology if trek goes twice on same path (fixes #671)
- Overlapping is now more precise (fixes #710)
- Reworked trek print layout
- Fix topology building if paths are taken twice (fixes #722)
- Fix tiling offset with horizontal bboxes
- Fix display of POI layer by default on list (fixes #696)
- Fix translation of not validated paths (fixes #730)
- Fix error if topology is required and empty (fixes #745)
- Fix duplication of N-N relations on path split (fixes #738)
- Fix project map in detail page (fixes #734)
- Fix project listed deleted interventions (fixes #739)
- Fix project listed infrastructures through interventions (fixes #740)
- Fix saving intervention form on infrastructure
- Repair serializing of properties after upgrade of django-geojson (fixes #755)
- Added `public_transport` and `advised_parking` to trek JSON detail API (fixes #758)
- Repair land layers colors after upgrade of django-geojson
- Upgraded to django-geojson 2.0
- Upgraded to Django 1.5

notes

Specify allowed host (server IP) in `etc/settings.ini` (*for example*): * `host = 45.56.78.90`
Empty object caches: * `sudo /etc/init.d/memcached restart` * `rm -rf ./var/cache/*`

29.328 0.18 (2013-06-06)

- Add pretty trek duration in JSON
- Add information desk field in Trek (fixes #624)

29.329 0.17 (2013-05-17)

- Show trek duration as human readable in minutes, hours and days (fixes #471, #683)
- Fix hover on paths that interfered with clic for topology creation (fixes #680)
- Run API urls on different workers (ref #672)
- Fix redirect to root url after logout (fixes #264)
- Fix redirect to next after login (fixes #381)
- Switch to Memcached instead of local memory in production
- Move secret key to settings.ini
- Relate paperclip FileType to Structure (fixes #256)
- Relate PhysicalTypes to Structure (fixes #255)
- Relate Organisms to Structure (fixes #263)
- Compute max_resolution automatically
- Fix creation and edition of interventions on infrastructures (fixes #678)
- Change default objects color to yellow
- Restored Italian translations
- Fix regex for RAISE NOTICE (fixes #673)
- Initial public version

See project history in *docs/history.rst* (French).

CHAPTER
THIRTY

INDICES AND TABLES

- genindex
- search